



Emergency LED Driver 23.1 Watts output power

Product order number: 12 NC number:
 BSL722M (Triangular battery option) 913710896502
 BSL722FBM (Flat battery option) 913702445501

Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

Specifications

UI Component Recognized/Csa Certified
 Factory Installation only
 (Indoor and Damp locations)

Illumination Time
 90 Minutes

Full Warranty
 3 Years (NOT pro-rata)

Universal Input Voltage
 120 through 277 VAC, 50/60 Hz

AC Input Current
 80 mA

AC Input Power Rating
 7.5 W

Output Voltage
 28.0 to 33.0 VDC

Output Current
 700 mA

Output Power
 23.1 W (Maximum)

Test Switch
 Low Voltage, IP67 rated ITS

Battery
 High-Temperature, Maintenance-Free
 Nickel-Cadmium Batteries
 7- to 10-Year Life Expectancy

Battery Charging Current
 160 mA

Recharge Time
 24 Hours

Charging Indicator Light
 LED

Temperature Rating (Ambient)
 0°C to +60°C (32°F to 140°F)

Dimensions
 9.37" x 2.20" x 1.05"
 (238 mm x 55.9 mm x 26.7 mm)
 Mounting Center 8.89" (226 mm)


Weight
 4 lbs. (1.82 kg)

Benefits:


- For use in damp locations
- Universal input (120 through 277 VAC, 50/60 Hz)

Dimensions


9.37" x 2.20" x 1.05" (mounting center - 8.89")

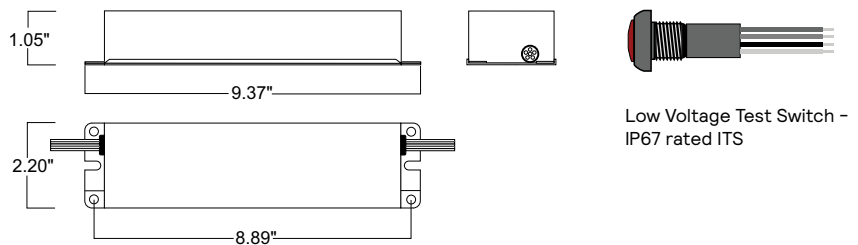

Triangular Battery Option 1

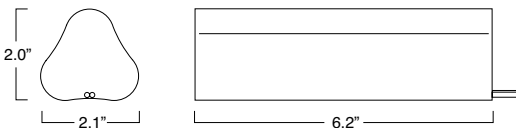

Flat Battery Option 2

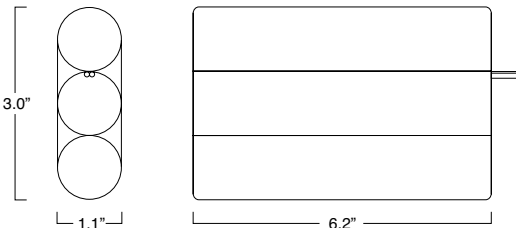

BSL722 Emergency LED driver, 23.1W output power

Application

The BSL722 emergency LED driver works in conjunction with an AC LED driver to convert new LED fixtures into emergency lighting. The emergency driver unit consists of a battery charger and electronic circuitry in one compact case. The batteries are separate from the driver and are available in triangular and flat configurations. The BSL722 can be used with an LED lighting load of up to 23.1 Watts at rated current of 700 mA for 90 minutes. If used in an emergency-only fixture, no AC driver is necessary. The BSL722 is suitable for damp locations. The BSL722 is not suitable for air handling heated air outlets or wet or hazardous locations. For more information about specific LED and AC driver compatibility, please call the factory.

Operation

When AC power fails, the BSL722 immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. When AC power is restored, the emergency driver automatically returns to the charging mode.

Installation

The BSL722 does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency driver. The emergency driver must be fed from the same branch circuit as the AC driver. Installation is not recommended with fixtures where the ambient temperature may fall below 0° C.

Emergency Illumination

The BSL722 operates an LED load of up to 23.1 W at rated current (700 mA) for a minimum of 90 minutes.

Specification

Emergency lighting shall be provided by using a standard LED fixture equipped with a Bodine BSL722 emergency driver. This emergency driver shall consist of high-temperature, maintenance-free nickel-cadmium batteries with a separate battery charger and electronic circuitry contained in one 9.4" x 2.2" x 1.05" metal case. Battery and installation hardware shall be provided

and a low voltage, normally open, IP67 rated ITS. The emergency driver shall be capable of operating an LED load of up to 23.1 Watts at rated current (700 mA) for a minimum of 90 minutes. It is suitable for damp locations. The BSL722 shall have 7.5 Watts of input power and a 54.0 Watt-hour battery capacity and shall comply with emergency standards set forth by the current NEC, National Building Code of Canada and the Canadian Electrical Code. The emergency drivers shall be UL Listed for US and Canada for the US and Canada for factory installation only.

Warranty

Model BSL722 is warranted for three (3) full years from date of purchase. Please see detailed warranty information on our web site.

Typical Wiring Diagram

See Installation Instructions for complete information.

