

C All LED Exit & Emergency Combo



ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads.
- 1 watt (8 LEDs x 0.125 watt) per head
- High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long-life, energy efficient Red or Green LED exit sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 9.6V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

OPTIONS


- HL: 12-LED heads provide increased center-to-center spacing. (1.5 watt (8 LEDs x 0.125 watt) per head)
- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
- NH: No lamp head attach to the unit enabling it to be used as remote capable exit sign.
- RC: Remote capacity option available

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 40°C)

C All LED Exit & Emergency Combo

DIMENSIONS

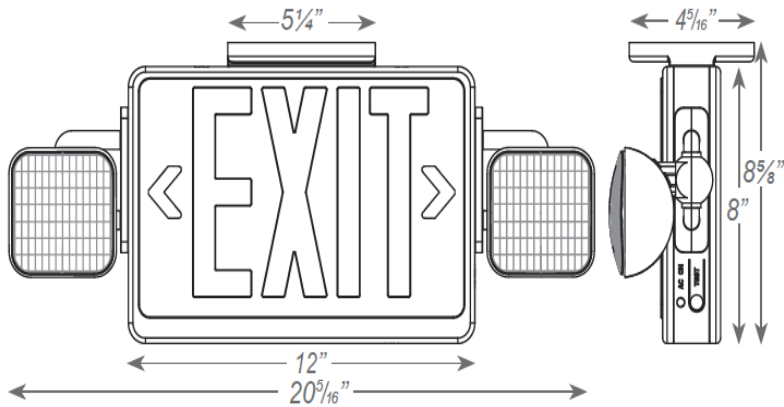

C Ordering Information

Model	No. of Faces	Letter Color	Housing	Options
C	2 - Universal Single/ Double Face	R - Red G - Green	W- White B- Black	RC - Remote Capacity HL - High Lumen NH- No Lamp Heads SDT - Self-diagnostic

Order Example:

C2RWSDT

