

MCP05 Canopy Light




Suitable for Parking structures, storage areas, shopping area walkways, entryway, and low level security.

- One piece die cast housing provides better waterproofing, suitable for both indoor and outdoor application.
- Suitable for J-BOX mounting, and easy for installation, also support pendant mounting, wires coming out from the back for easier wire connections.
- Parking Garage Photometry and polycarbonate optical lens with heat resistance.
- Support wires coming from the 1/2" threaded hole for easier wire connections.
- Optional PIRsensor and Emergency Battery.

FEATURES

- Sealed die-casting profile for indoor and outdoor applications.
- Voltage is 120-277V & 347-480V.
- Lumen output from 3700-5400lm with efficacy up to 139lm/W.
- Provide with a PIR sensor ideal for parking garage and optional for emergency battery.
- Replacing 100W MH.
- Operating temperature is -40°C to 45°C (-40°F to 113°F).
- UL/cUL pending.

DIMENSIONS

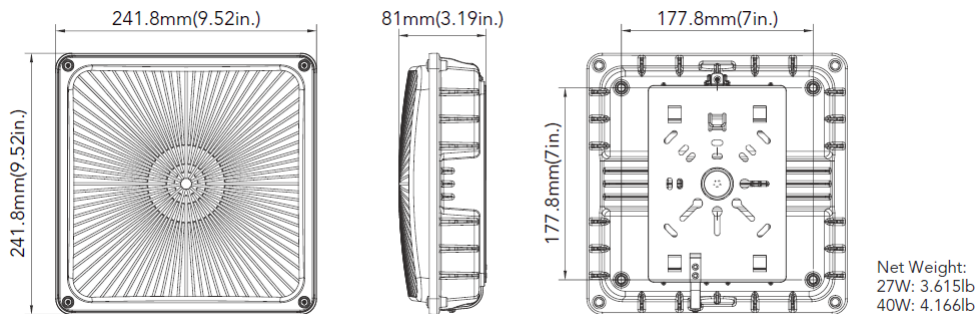

MCP05 Canopy Light

PERFORMANCE DATA

Watts	Photometry	Voltage	4000K (70cri)		5000K (70cri)	
			Lumens	LPW	Lumens	LPW
27W	Parking Garage	120-277vac	3700lm	137	3750lm	139
40W	Parking Garage	120-277vac	5300lm	133	5400lm	135

ORDERING INFORMATION

ORDER EXAMPLE: MCP05402750SGMDB

Model	Watts	Voltage	CCT	Finish	Sensor (option)	Dimmable (option)	Emergency Battery (option)
MCP05	27 27W 40 40W	27V 120-277V 48V 347-480V	40K 50K	D Dark Bronze B Black W White SG Silver Gray	M with Motion Sensor Blank None	D 0-10 Dimmable Blank NON Dimmable	B With Battery Blank Without Battery