

MFD03 Mini Flood Light




FEATURES

- Rugged aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection.
- Lumen output 1500-5400lm with efficacy to 120lm/W
- Three installation for option: 1/2" knuckle mount or trunnion or wall mount
- Wide Flood beam spread 7H x 7V
- Long life LEDs lasting up to 50,000hours
- IP66 rated and suitable for use in ambients from -40°C to 45 °C (-40°F~113°F).
- UL wet location listed and DLC qualified


The MFD03 Mini Flood Light is a premium LED luminaire designed to illuminate Facade, Wall Washing, Landscape lighting, Poster board lighting and Building lighting.

DIMENSIONS


15W(Knuckle Mount)

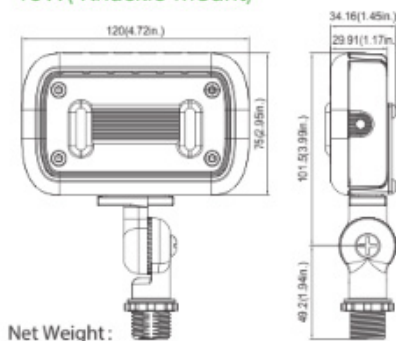


15W(Trunnion Mount)

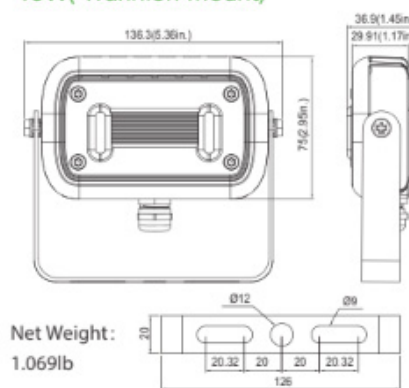

30W(Knuckle Mount)

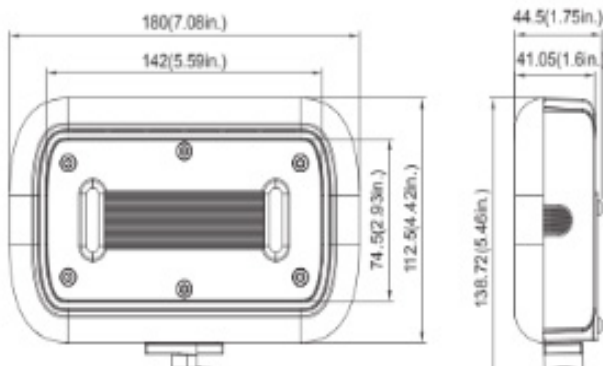


30W(Trunnion Mount)

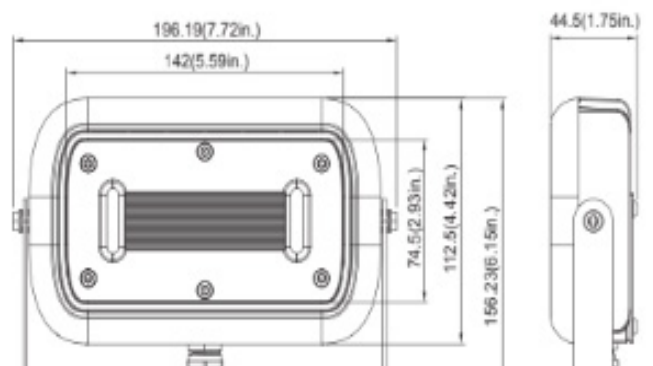


MFD03 Mini Flood Light

DIMENSIONS

45W(Knuckle Mount)

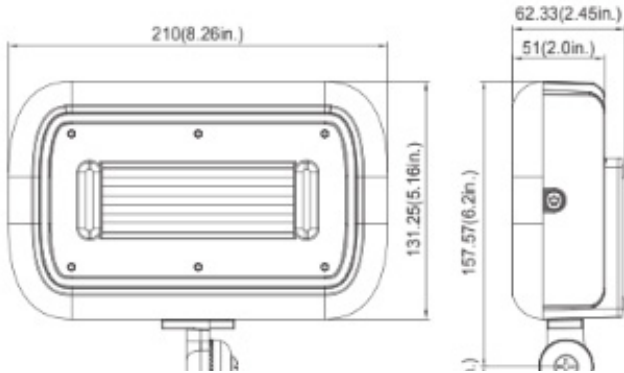

45W(Trunion Mount)

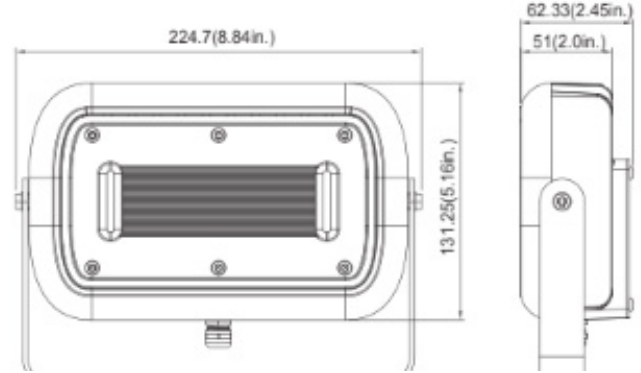

ORDERING INFORMATION

ORDERING EXAMPLE: MFD15W27V35KBDB77TR

Fixture	Power Consumption	Input Voltage	CCT	CRI	Finish	Beam Angle	Mounting Option
MFD	15W 30W 45W	27V 120-277V	30K 3000K 35K 3500K 40K 4000K 50K 5000K	B= 70CRI	D= Dark Bronze B = Black W= White	B77 7Hx7V	KN= Knuckle Mount TR= Trunion Mount*

*can be used as a wall mount

PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	DIST.TYPE	4000K (70CRI)		5000K (70CRI)	
			LUMENS	LPW	LUMENS	LPW
15W	120-277VAC	7Hx7V	1500lm	100 lm/W	1500lm	100 lm/W
30W	120-277VAC	7Hx7V	3000lm	100 lm/W	3000lm	100 lm/W
45W	120-277VAC	7Hx7V	5400lm	120 lm/W	5400lm	120 lm/W