

XCNY Die Cast Aluminum LED Exit Sign



ILLUMINATION

- Ultra-bright, energy efficient, long-life red LED.
- NY approved 8" exit letters.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

OPTIONS


- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.

WARRANTY/LISTING

- FIVE year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C).

XCNY Die Cast Aluminum LED Exit Sign

DIMENSIONS

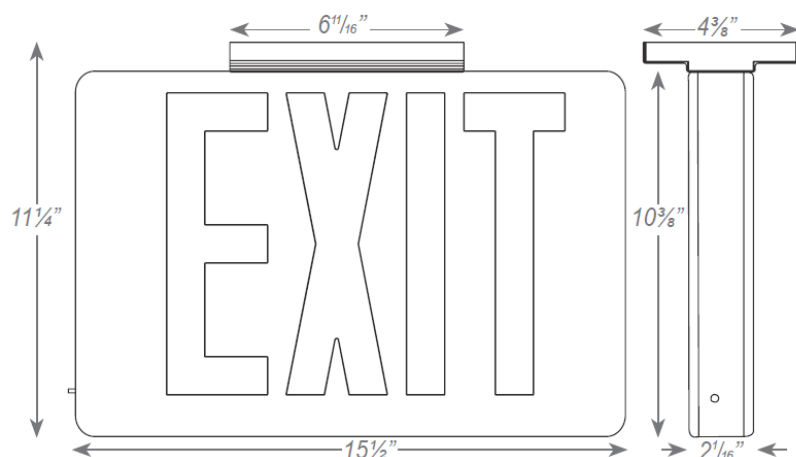

XCNY Ordering Information

Model	No of Faces	Letters	Panel	Housing	Battery	Options
XCNY	1 - Single 2 - Double SD - Dual	R - Red	W - White B - Black A - Aluminum	W - White B - Black A - Aluminum	Blank - AC Only E - Battery Backed	SDT - Self Diagnostics* 2C - Dual Circuit Option**

* Available in E (Battery Backed) units only

** Available in AC units only

Order Example:

XCNY2RWWE2C

