



- > Energy Saving 18 Watt Integrated LED
- > Uses 82% Less Energy than Equivalent 150 Watt Incandescent Bulb
- > Soft White 3000K CCT
- > Lasts 45 years\* or 50,000 Hours Continuous Use
- > Maintenance Free — No Bulb Replacements
- > 5 Year Limited Warranty
- > IC Rated for Direct Contact with Insulation

# 5 1/8" Recessed Retrofit Downlight


1300lm | 120VAC | Model 53179111 | Part DL-6-18-930-SV-D



## SPECIFICATIONS

Model	53179111
Part	DL-6-18-930-SV-D
Description	5 1/8" Recessed Retrofit Downlight Kit
Input Voltage (VAC)	120
Wattage	18
Dimmability	Triac
Average Rated Life <sup>1</sup>	50,000 hours
Typical Lumens <sup>2</sup>	1300
CCT <sup>3</sup>	3000K
Location Rating	UL Wet
CRI <sup>4</sup>	90
Beam Angle	100
Operating Temperature	Min -4°F (-20° C), Max 113°F (45° C)
Power Factor	>0.9
R9	41
DUV	0.00135
CBCP	665
Operating Frequency (Hz)	60

- 1 Hours lifetime with 70% lumen maintenance  
 2 Thermally stable typical lumens (±10%)  
 3 Thermally stable CCT (±10%)  
 4 Color rendering index/Ra

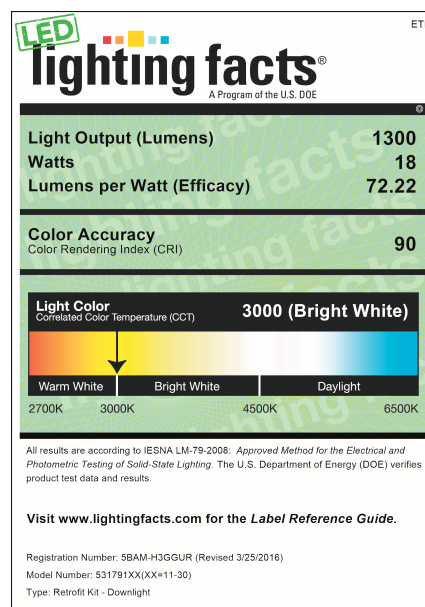

**TO ORDER:**  
[www.ETiSSL.com](http://www.ETiSSL.com)  
 Call: 1.855.ETi.SSLI  
 1.855.384.7754





# 5 1/6" Recessed Retrofit Downlight

1300 lm | 120VAC | Model 53179111 | Part DL-6-18-930-SV-D

## SHIPPING INFORMATION

Model	53179111
Part	DL-6-18-930-SV-D
UPC	849489003160
Product Dimensions (W x H in.)	7 31/64 x 3 17/64
Product Dimensions (W x H cm.)	19 x 8.31
Product Weight (lbs.)	0.79
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	4
Master Carton Bar Code	50849489003165
Master Carton Dimensions (L x W x H in.)	15.67 x 9.92 x 9.45
Master Carton Dimensions (L x W x H cm.)	398 x 252 x 240
Master Carton Weight (lbs)	6.1
Pallet Quantity	192

## COMPATIBILITY

### Dimmers:

Lutron: TG-603PGH-WH, DVW-604PGH-WH, MSCL-OP153M-WH, GL-600H-DK, S-600P

Leviton: 81000-I

Cooper: SCL03P-A-K

### Cans:

Commercial Electric: H1, H2, H3, H4, H5, H6, H7, H8, H15, H16, H17, H18, H21

Juno: IC20, IC21, IC22, IC20R, IC2R, IC22R

Halo: H5T, H5RT, H5ICAT, H5RICAT, H5ICT, H5RICT, H7RICT, H7ICAT, H7RICAT, H7ICT, H7T, H7RT, H27ICT, H27T, H27RT, H750ICAT, H750RICAT

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see [www.etiled.us/fcc15b](http://www.etiled.us/fcc15b)

**TO ORDER:**  
[www.ETiSSL.com](http://www.ETiSSL.com)  
Call: 1.855.ETi.SSLI  
1.855.384.7754

**ETi Solid State Lighting, Inc.**  
720 Corporate Woods Parkway  
Vernon Hills, IL 60061  
Phone: 855.384.7754  
Fax: 847.383.6256