

5 7/16" AC Power Recessed Downlight

670lm | 120VAC | Ordering 53193101 | Part DL-6-11-827-SV-D


- > Energy Saving 9 Watt Integrated LED
- > Uses 84% Less Energy than Equivalent 65 Watt Incandescent Bulb
- > Warm White 2700K CCT
- > Lasts 45 years* or 50,000 Hours Continuous Use
- > Maintenance Free — No Bulb Replacements
- > 5 Year Limited Warranty
- > IC Rated for Direct Contact with Insulation



SPECIFICATIONS

Ordering	53193101
Part	DL-6-11-827-SV-D
Description	5 7/16" AC Power Recessed Retrofit Downlight Kit
Input Voltage (VAC)	120
Wattage	9
Dimmability	Triac
Average Rated Life ¹	50,000 hours
Typical Lumens ²	670
CCT ³	2700K
Location Rating	UL Wet
CRI ⁴	80
Beam Angle	100
Operating Temperature	Min -4°F (-20° C), Max 113°F (45° C)
Power Factor	>0.9
R9	12
DUV	-0.00084
CBCP	311
Operating Frequency (Hz)	60

1 Hours lifetime with 70% lumen maintenance
 2 Thermally stable typical lumens (±10%)
 3 Thermally stable CCT (±10%)
 4 Color rendering index/Ra

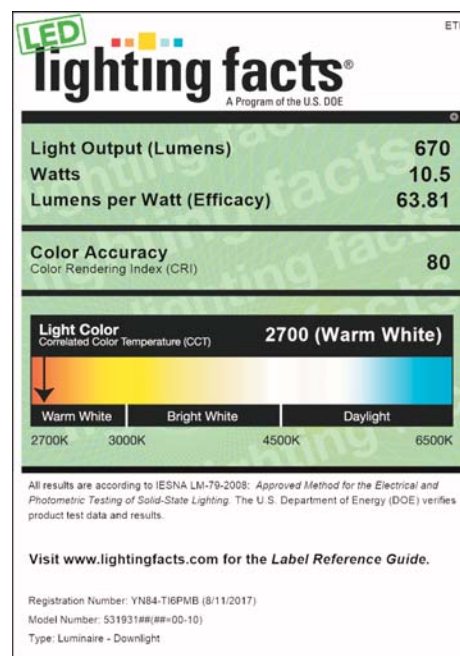

TO ORDER:
www.ETiSSL.com
 Call: 1.855.ETi.SSLI
 1.855.384.7754





5⁵/₁₆" AC Power Recessed Downlight

670 lm | 120VAC | Ordering 53193101 | Part DL-6-11-827-SV-D

SHIPPING INFORMATION

Ordering	53193101
Part	DL-6-11-827-SV-D
UPC	849489006406
Product Dimensions (W x H in.)	7 1/2 x 2 1/8
Product Dimensions (W x H cm.)	19 x 5 1/2
Product Weight (lbs.)	0.77
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	4
Master Carton Bar Code	50849489006401
Master Carton Dimensions (L x W x H in.)	10 x 9 x 10
Master Carton Dimensions (L x W x H cm.)	242 x 217 x 262
Master Carton Weight (lbs)	1.84
Pallet Quantity	252

COMPATIBILITY

Dimmers:

Lutron: CT-603PGH-WH, GL-600H-DK, MSCL-OP153M, MACL-153MH-WH, SCL-153PR-WH, TGCL-153PR-WH, TGCL-153PH-WH, TG-603PGH-WH, AYCL-153P-WH
Leviton: CD-C22-06672-12A, CD-R62-06674-12A, CD-R50-IPL06-12A, SB-011-IPL06-22A, 8100-I
Legrand: ADWR703HW4, ADPD453LM2
Cooper: DLC03PA-PTA, 9573A-PTA

Cans:

Commercial Electric: H1, H2, H3, H4, H5, H6, H7, H8, H15, H16, H17, H18, H21
Juno: IC20, IC21, IC22, IC20R, IC2R, IC22R
Halo: H5T, H5RT, H5ICAT, H5RICAT, H5ICT, H5RICT, H7RICT, H7ICAT, H7RICAT, H7ICT,

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etiled.us/fcc15b

TO ORDER:
www.ETiSSL.com
Call: 1.855.ETi.SSLI
1.855.384.7754

ETi Solid State Lighting, Inc.
720 Corporate Woods Parkway
Vernon Hills, IL 60061
Phone: 855.384.7754
Fax: 847.383.6256