

Presented By: iLightDepot/GELightingDepot
Contact Phone: 513-272-0800
Contact E-mail: sales@ilightdepot.com

Customer Name:
Project Name:
Fixture Type:





**GE
Lighting**

75671 - GE296HO-MV-N

GE LFL Multi-Volt ProLine™ Electronic Program / Rapid Start Ballast

- Electronic ballasts for all general fluorescent applications
- Extends lamp life in frequently switched applications
- Reduced lamp replacement cost. Ideal for use with occupancy sensors
- Cold temperature -20F Minimum Starting Temperature

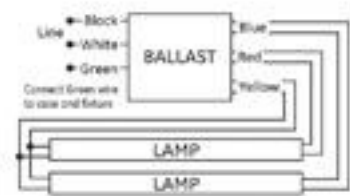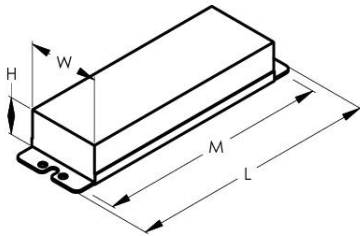

GENERAL CHARACTERISTICS

Application	2 or 1- F96T12HO Rapid Start 120 to 277 MultiVolt Proline
Category	Linear Fluorescent
Ballast Type	Electronic - Program / Rapid Start
Starting Method	Rapid start
Lamp Wiring	Series
Line Voltage Regulation (+/-)	10.0 %
Case Temperature (MAX)	70.0 °C
Ballast Factor	Normal
Power Factor Correction	Active
Sound Rating	A (20-24 decibels)
Enclosure Type	Metal
Additional Info	Auto-restart/Thermally protected
Primary Application	Sign

PRODUCT INFORMATION

Product Code	75671
Description	GE296HO-MV-N
Standard Package	Case
Standard Package GTIN	10043168756713
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168756716

DIMENSIONS

Case dimensions			
Length (L)	11.8 in(299.72 mm)		
Width (W)	2.2 in(54.61 mm)		
Height (H)	1.6 in(40.89 mm)		
Mounting dimensions			
Bracket Length (BL)	NaN in(NaN mm)		
Mount Length (M)	11.0 in(279.40 mm)		
Mount Width (X or F)	NaN in(NaN mm)		
Mount Slots (MS)	NaN in(NaN mm)		
Weight	4.0 lb		
Exit Type	Side		
Remote Mounting Distance	12.0 ft		
Remote Mounting Wire Gauge	18.0 AWG		
Lead lengths	Qty	Exit	Length (± 1 in.)
Black	1	Left	30 (762mm)
White	1	Left	30 (762mm)
Blue	2	Right	54.0 (1372mm)
Red	2	Right	42 (1067mm)
Yellow	2	Right	102 (2591mm)

ELECTRICAL CHARACTERISTICS

Supply Current Frequency 60.0 Hz

SAFETY & PERFORMANCE

- Canadian Energy Standards
- CSA
- FCC - CLASS A Non-Consumer
- UL Class P
- UL Listed
- UL Type 1 Outdoor
- UL Type HL

SPECIFICATIONS BY LAMP & WATTAGE

Lamp	# of Lamps	Line Volts	System Watts	Nom. Line Current	System Ballast Factor	Ballast Efficacy Factor	Power Factor% (>=)(<=)	Crest Factor	THD% (<=)	Min. Starting Temp (°F/°C)
F96T12/HO/WM	2	277	164	0.62 A	0.83	0.51	99	1.7	10.0	60.0 °F / NaN
F96T12/HO/WM	2	120	164	1.38 A	0.83	0.51	99	1.7	10.0	60.0 °F / NaN
F96T12/HO	1	120	104	0.88 A	0.92	0.88	99	1.7	15.0	-20.0 °F / NaN