

Presented By: iLightDepot
Contact Phone: 513-272-0800
Contact E-mail: sales@ilightdepot.com

Customer Name:
Project Name:
Fixture Type:





GE
Lighting

73231 - GE332MAX90-S60

GE LFL UltraMax™ Step Dimming Electronic Dimming Ballast

- Bi-Level Switching 100 to 60%
- Anti-Striation Control for better light quality, with no striations.
- UL 55C Ambient Rating - High Temperature Protection Circuit
- Multi-Voltage Technology handles voltage from 120 to 277V
- UL Type CC Rating provides protection against arcing in electrical devices.
- Cold temperature -22F Minimum Starting Temperature

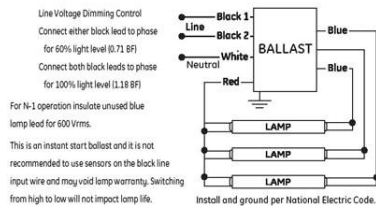

GENERAL CHARACTERISTICS

Application	3 - F32T8 120 to 277 "H" 1.18 BF UltraMax 100/60% step dim
Category	Linear Fluorescent
Ballast Type	Electronic - Dimming
Dimming Type	Step dimming
Starting Method	Instant start
Lamp Wiring	Parallel
Line Voltage Regulation (+/-)	10.0 %
Case Temperature (MAX)	70.0 °C
Ballast Factor	High (1.18)
Power Factor Correction	Active
Enclosure Type	Metal
Additional Info	Anti-striation control/Universal voltage/Inherent thermal protection
Primary Application	Standard

PRODUCT INFORMATION

Product Code	73231
Description	GE332MAX90-S60
Standard Package	Case
Standard Package GTIN	10043168732311
Standard Package Quantity	10
Sales Unit	Standard Pack
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168732314

DIMENSIONS

Case dimensions			
Length (L)		9.5 in(241.30 mm)	
Width (W)		1.7 in(43.18 mm)	
Height (H)		1.2 in(29.97 mm)	
Mounting dimensions			
Bracket Length (BL)		NaN in(NaN mm)	
Mount Length (M)		8.9 in(225.81 mm)	
Mount Width (X or F)		1.1 in(28.70 mm)	
Mount Slots (MS)		0.3 in(7.92 mm)	
Weight		1.4 lb	
Exit Type		Side	
Remote Mounting Distance		6.0 ft	
Remote Mounting Wire Gauge		18.0 AWG	
Lead lengths	Qty	Exit	Length (± 1 in.)
Red	1	Right	34.0 (864mm)
White	1	Left	25.0 (635mm)
Black	2	Left	25.0 (635mm)
Yellow	2	Right	41 (1041mm)
Blue	3	Right	34.0 (864mm)

ELECTRICAL CHARACTERISTICS

Supply Current Frequency (MIN)	60.0 Hz
--------------------------------	---------

SAFETY & PERFORMANCE

- cUL Listed
- UL Type 1 Outdoor
- UL Type CC
- UL Type HL
- RoHS Compliant
- Meets ANSI Standard C82.11-Cons 2002
- Meets ANSI Standard C62.41-1991
- FCC Part 18 (Class A) for EMI and RFI Non-Consumer Limits
- High Temperature Rated: Suitable for high temperature applications
- 70C max case temp 5 yr warranty or 90C max case temp 3 yr warranty

SPECIFICATIONS BY LAMP & WATTAGE

Lamp	# of Lamps	Line Volts	System Watts	Nom. Line Current	System Ballast Factor	Ballast Efficacy Factor	Power Factor% (>=)(<=)	Crest Factor	THD% (<=)	Min. Starting Temp (°F/°C)
F40T8	2	120	102	0.85 A	1.22	1.20	99	1.4	10.0	-22.0 °F / NaN