

Presented By: iLightDepot/GE Lighting Depot
Contact Phone: 513-272-0800
Contact E-mail: sales@ilightdepot.com

Customer Name:
Project Name:
Fixture Type:



GE
Lighting

97588 - F13DBX23/835/ECO

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse



GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	GX23-2
Rated Life	10000.0 hrs
Starting Temperature (MIN)	-4.0 °C
Cathode Resistance	10.5 Ohm
LEED-EB MR Credit	584 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;W

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	810.0
Mean Lumens	685.0
Nominal Initial Lumens per Watt	62
Color Temperature	3500.0 K
Color Rendering Index (CRI)	82.0

ELECTRICAL CHARACTERISTICS


Wattage	13.0
Open Circuit Voltage Across Starter (MIN)	198.0 V
Lamp Current	0.285 A
Current Crest Factor (MAX)	1.7
Supply Current Frequency	60.0 Hz

DIMENSIONS

Maximum Overall Length (MOL)	4.8400 in(122.9 mm)
Nominal Length	4.700 in(119.4 mm)
Base Face to Top of Lamp	3.900 in(99.1 mm)

PRODUCT INFORMATION

Product Code	97588
Description	F13DBX23/835/ECO
Standard Package	BUNDLE
Standard Package GTIN	
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168975889

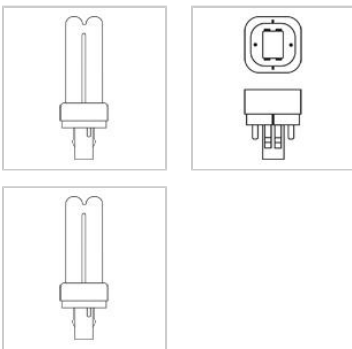


CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

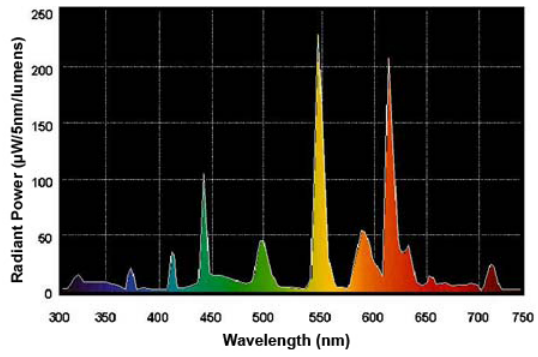

NOTES

- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life