

Presented By: iLightDepot
Contact Phone: 513-272-0800
Contact E-mail: sales@ilightdepot.com





Customer Name:
Project Name:
Fixture Type:



GE
Lighting

97606 - F26DBX/827/ECO

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse



GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	G24d-3
Rated Life	10000.0 hrs
Starting Temperature (MIN)	-9.0 °C
Cathode Resistance	2.7 Ohm
LEED-EB MR Credit	274 picograms Hg per mean lumen hour
Additional Info	TCLP compliant
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;Warehouse

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1710.0
Mean Lumens	1460.0
Nominal Initial Lumens per Watt	65
Color Temperature	2700.0 K
Color Rendering Index (CRI)	82.0

ELECTRICAL CHARACTERISTICS

Wattage	26.0
Voltage	105.0
Open Circuit Voltage Across Starter (MIN)	198.0 V
Lamp Current	0.325 A
Current Crest Factor (MAX)	1.7
Supply Current Frequency	60.0 Hz

DIMENSIONS

Maximum Overall Length (MOL)	6.6700 in(169.4 mm)
Nominal Length	6.700 in(170.2 mm)
Base Face to Top of Lamp	5.790 in(147.1 mm)

PRODUCT INFORMATION

Product Code	97606
Description	F26DBX/827/ECO
ANSI Code	60901-IEC-0526-2
Standard Package	BUNDLE
Standard Package GTIN	
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168976060


CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Remove and install by grasping only plastic portion of the lamp.

GRAPHS & CHARTS

Graphs_Spectral Power Distribution

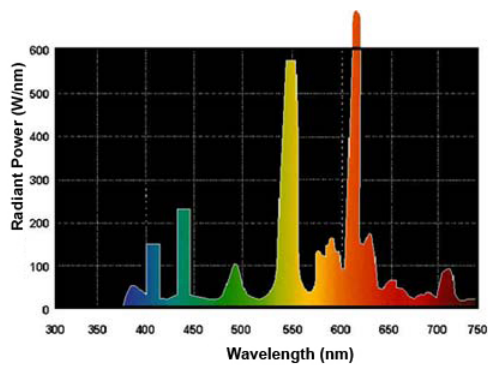

NOTES

- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life