

**Presented By:** iLightDepot  
**Contact Phone:** 513-272-0800  
**Contact E-mail:** sales@ilightdepot.com


**Customer Name:**  
**Project Name:**  
**Fixture Type:**



GE  
Lighting

### 97636 - F42TBX/841/A/ECO

GE Ecolux® Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

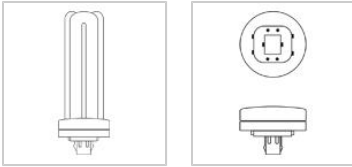

#### CAUTIONS & WARNINGS

##### Caution

- Lamp may shatter and cause injury if broken
  - Remove and install by grasping only plastic portion of the lamp.

#### GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	GX24-q4
Rated Life	17000.0 hrs
Starting Temperature (MIN)	-18.0 °C
Cathode Resistance	2.7 Ohm
LEED-EB MR Credit	66 picograms Hg per mean lumen hour
Rated Life (rapid start) @ Time	17000.0 @ 3.0/20000.0 @ 12.0 h
Additional Info	Dimmable with appropriate dimming ballast./End of Life Protection (EOL)/TCLP compliant
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;W

#### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	3200.0
Mean Lumens	2690.0
Nominal Initial Lumens per Watt	76
Color Temperature	4100.0 K
Color Rendering Index (CRI)	82.0

#### ELECTRICAL CHARACTERISTICS

Wattage	42.0
Voltage	135.0
Current (max)	5.25 A
Open Circuit Voltage (after preheating) (MAX)	265.0 V
Open Circuit Voltage (MIN)	515.0 V
Lamp Current	0.32 A
Preheat Voltage (MIN)	4.25 V
Current Crest Factor (MAX)	1.7
Supply Current Frequency	20000.0 Hz

#### DIMENSIONS

Maximum Overall Length (MOL)	6.4000 in(162.6 mm)
Nominal Length	6.400 in(162.6 mm)
Base Face to Top of Lamp	5.770 in(146.6 mm)

#### PRODUCT INFORMATION

Product Code	97636
Description	F42TBX/841/A/ECO
ANSI Code	60901-IEC-7442-2
Standard Package	Case
Standard Package GTIN	10043168976364
Standard Package Quantity	10
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168976367

#### NOTES

- 4-Pin lamp minimum starting temperature is a function of the ballast. Most ballasts are rated with a minimum starting temperature of 50 degrees F (10 C). Ballasts are also available that provide reliable starting to 0 degrees F (-18C) and -20 F (-29C).
- Amalgam product experience stable brightness over a wider temperature range and in various operating positions.
- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life