

Presented By: iLightDepot/GE Lighting Depot
Contact Phone: 513-272-0800
Contact E-mail: sales@ilightdepot.com

Customer Name:
Project Name:
Fixture Type:




GE
Lighting

75379 - GE132MVPS-N-V03

GE LFL UltraStart™ T8 100-3% 0-10V Dimming Electronic Dimming Ballast

- High Efficiency 100-3% 0-10V Programmed Start Dimming
- Multi-Voltage Technology handles voltage from 120 to 277V
- Cathode Cutout technology from 100-80%
- Parallel Lamp Operation - reliable deep dimming performance
- NEMA LL-9 Compliant - GE programmed start life & warranty ratings
- Anti-Striation Control for use with F32T8, F32T8/WM, F28T8 and 3 ft. and 2 ft. T8 Lamps
- Fast Starting Time
- UL Type CC Rating provides protection against arcing in electrical devices.
- UL 55C Ambient Rating - High Temperature Protection Circuit
- Compatible with Class 1 or Class 2 LV 0-10VDC controllers

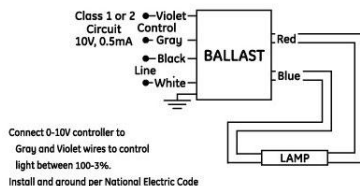

GENERAL CHARACTERISTICS

Application	1 - F32T8 120-277V "N" .88 BF UltraStart 0-10V Dimming 100-3%
Category	Linear Fluorescent
Ballast Type	Electronic - Dimming
Starting Method	Rapid start
Lamp Wiring	Parallel
Line Voltage Regulation (+/-)	10.0 %
Ambient Temperature (MAX)	40.0 °C(4 °C)
Sound Rating	A (20-24 decibels)
Additional Info	Anti-striation control/Parallel Lamp Operation/No PCBs

PRODUCT INFORMATION

Product Code	75379
Description	GE132MVPS-N-V03
Standard Package	Case
Standard Package GTIN	10043168753798
Standard Package Quantity	10
Sales Unit	Standard Pack
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168753791

DIMENSIONS

Case dimensions		
Length (L)		9.5 in(241.30 mm)
Width (W)		1.7 in(43.18 mm)
Height (H)		1.2 in(29.97 mm)
Mounting dimensions		
Bracket Length (BL)		NaN in(NaN mm)
Mount Length (M)		8.9 in(225.81 mm)
Mount Width (X or F)		1.1 in(28.70 mm)
Mount Slots (MS)		0.3 in(7.92 mm)
Weight		1.65 lb
Lead lengths	Qty	Exit Length (± 1 in.)
Black	1	25 (635mm)
Blue	1	33 (838mm)
Gray	1	25 (635mm)
Red	1	33 (838mm)
Violet	1	25 (635mm)
White	1	25 (635mm)

SAFETY & PERFORMANCE

- Meets ANSI Standard C62.41-1991
- FCC Part 18 (Class A) for EMI and RFI Non-Consumer Limits
- UL Class P
- UL Type 1 Outdoor
- UL Type HL
- UL Type CC
- RoHS Compliant
- No PCB's
- Complies with ANSI C82.11 Annex A Specification for Low Voltage Control Interface for Controllable Ballasts
- Class 1 or 2 Circuit 10V, 0.5mA

SPECIFICATIONS BY LAMP & WATTAGE

Lamp	# of Lamps	Line Volts	System Watts	Nom. Line Current	System Ballast Factor	Ballast Efficacy Factor	Power Factor% (>=)	Crest Factor THD% (<=)	Min. Starting Temp (°F/°C)
F32T8/WM	1	120	28	0.24 A	88.00	314.29	98	1.0 10.0	60.0 °F / NaN
F32T8/WM	1	120	7	0.05 A	0.01	0.14	90	1.7 15.0	60.0 °F / NaN
F32T8/WM	1	277	28	0.1 A	0.88	3.14	98	1.7 10.0	60.0 °F / NaN
F32T8/WM	1	120	7	0.05 A	0.01	0.14	90	1.7 15.0	60.0 °F / NaN
F32T8/WM	1	277	7	0.03 A	0.01	0.14	90	1.7 20.0	60.0 °F / NaN
F32T8	1	120	30	0.25 A	0.88	2.93	98	1.7 10.0	60.0 °F / NaN

F32T8	1	120	7	0.06 A	0.01	0.14	90	1.7	15.0	60.0 °F / NaN
F32T8	1	277	29	0.11 A	0.88	3.03	98	1.7	10.0	60.0 °F / NaN
F32T8	1	277	7	0.03 A	0.01	0.14	90	1.7	20.0	60.0 °F / NaN
F28T8	1	120	26	0.22 A	0.88	3.38	98	1.7		60.0 °F / NaN
F28T8	1	277	26	0.09 A	0.88	3.38	98	1.7	10.0	60.0 °F / NaN
F28T8	1	120	7	0.05 A	0.01	0.14	90	1.7	15.0	60.0 °F / NaN
F28T8	1	277	7	0.03 A	0.01	0.14	90	1.7	20.0	60.0 °F / NaN
F25T8/WM	2	120	21	0.18 A	0.91	4.33	99	1.7	10.0	60.0 °F / NaN
F25T8/WM	2	120	6	0.06 A	0.04	0.67	98	1.7	20.0	60.0 °F / NaN
F25T8/WM	2	277	21	0.08 A	0.91	4.33	98	1.7	10.0	60.0 °F / NaN
F25T8/WM	2	277	7	0.03 A	0.04	0.57	90	1.7	25.0	60.0 °F / NaN
F25T8	2	120	24	0.2 A	0.93	3.88	99	1.7	10.0	60.0 °F / NaN
F25T8	2	120	6	0.05 A	0.03	0.50	98	1.7	20.0	60.0 °F / NaN
F25T8	2	277	24	0.09 A	0.93	3.88	98	1.7	10.0	60.0 °F / NaN
F25T8	2	277	7	0.03 A	0.03	0.43	90	1.7	25.0	60.0 °F / NaN
F17T8/WM	2	120	16	0.14 A	0.89	5.56	99	1.7	10.0	60.0 °F / NaN
F17T8/WM	2	277	16	0.07 A	0.89	5.56	98	1.7	15.0	60.0 °F / NaN
F17T8/WM	2	120	7	0.06 A	0.16	2.29	98	1.7	20.0	60.0 °F / NaN
F17T8/WM	2	277	8	0.03 A	0.16	2.00	90	1.7	25.0	60.0 °F / NaN
F17T8	2	277	18	0.07 A	0.94	5.22	98	1.7	15.0	60.0 °F / NaN
F17T8	2	120	18	0.16 A	0.94	5.22	99	1.7	10.0	60.0 °F / NaN
F17T8	2	120	7	0.06 A	0.13	1.86	98	1.7	20.0	60.0 °F / NaN
F17T8	2	277	8	0.03 A	0.13	1.62	90	1.7	25.0	60.0 °F / NaN

CAUTIONS & WARNINGS

NOTES

- Control wires open circuit operates at full power
- Control wires closed circuit operates at full dim
- The dimming range will be significantly shorter when using F17T8, F25T8 (3ft) or when delamping UltraMax® Dimming ballasts. Please see GELighting.com product specifications for a complete listing of product specifications by ballast, lamp type and number of lamps per ballast.

WARRANTY INFORMATION

GE Lighting warrants to the purchaser that each ballast will be free from defects in material or workmanship for period as defined in the attached documents from the date of manufacture when properly installed and under normal conditions of use.