


Refit Solutions from GE

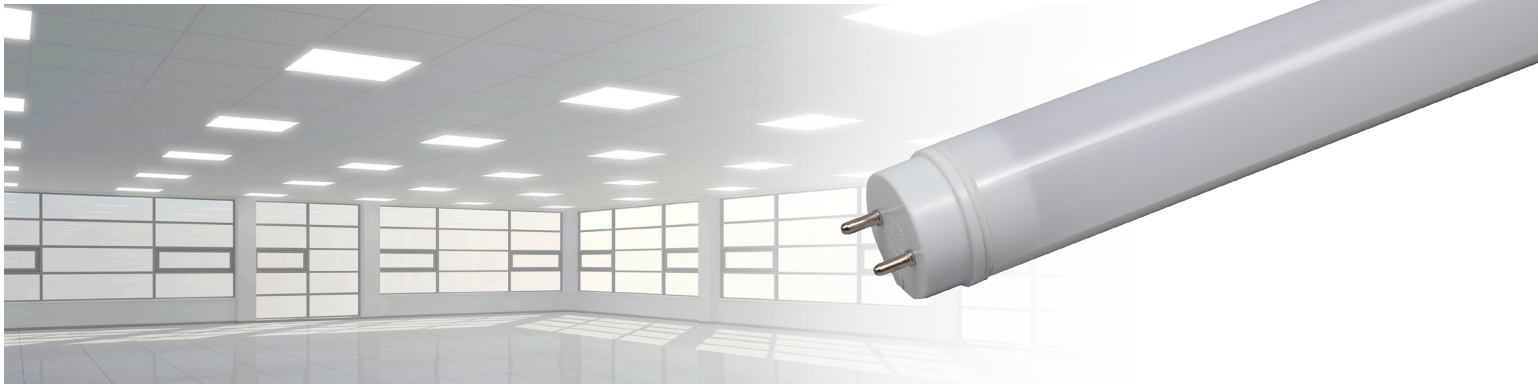

Application illustration only, subject lamps not used in photo.

Type C LED Tubes - 2, 3 and 4 foot

Convert your existing linear fluorescent fixture to LED lighting without needing a comprehensive reinstall. LED tubes are ideal for those seeking high energy savings with minimal installation time. Each LED tube is operated by a GE Lightech™ driver. See reverse for LED tubes and Lightech driver product details.

FEATURES

- 2', 3' & 4' tubes
- 900 – 2,200 lumens
- >100 total system lumens per watt (LPW)
- 3000K, 3500K, 4000K, 5000K and 6500K color temperatures
- 50,000-hour rated life
- UL and CUL-approved technologies
 - in compliance with UL 1598 certification
- Open or Enclosed Fixtures
- NSF Rated for food application (shatter resistant)
- Damp rating
- 5 year warranty
- DLC listed

BENEFITS

- Fast and Easy LED upgrade
- Low energy LFL replacement
- 66% longer life than LFL (50,000 vs. 30,000 hours)
- Better quality of light
 - instant on
- Shatter resistant
 - prevents breakage and downtime
- Easy disposal, non-hazardous waste

To learn more about saving money and energy, go to: gelighting.com/ThinkLED

When you Think LED lighting, Think GE.

ecomaginationSM



imagination at work

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

Product Specifications - 2-3-4 Foot LED Tubes

Refit LED Tubes

Type	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (in)	Lumens Initial	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	DLC	UL	#Location Rating	Additional Information
Remote Plastic 4 ft LED Tubes (Operates on Remote Driver)																
T8	G13	18	94381	LED21T8/4/835	10	48	2400	3500K	80+		50,000	Yes	Yes	Damp	Requires Driver	
	G13	18	94382	LED21T8/4/840	10	48	2500	4000K	80+		50,000	Yes	Yes	Damp	Requires Driver	
	G13	18	94383	LED21T8/4/850	10	48	2500	5000K	80+		50,000	Yes	Yes	Damp	Requires Driver	
	G13	18	26059	LED21T8/4/865	10	48	2400	6500K	80+		50,000	-	Yes	Damp	Requires Driver	
	G13	13	38954	LED15T8/4/830	10	48	1700	3000K	80+		50,000	Yes	Yes	Damp	Requires Driver	
	G13	13	38957	LED15T8/4/835	10	48	1800	3500K	80+		50,000	Yes	Yes	Damp	Requires Driver	
	G13	13	38958	LED15T8/4/840	10	48	1800	4000K	80+		50,000	Yes	Yes	Damp	Requires Driver	
	G13	13	38962	LED15T8/4/850	10	48	1800	5000K	80+		50,000	Yes	Yes	Damp	Requires Driver	
	G13	13	38964	LED15T8/4/865	10	48	1800	6500K	80+		50,000	-	Yes	Damp	Requires Driver	
Remote Plastic 3 ft LED Tubes (Operates on Remote Driver)																
G13	16	82343	LED18T8/3/835	10	36	1800	3500K	80+			50,000	-	Yes	Damp	Requires Driver	
G13	16	82345	LED18T8/3/840	10	36	1800	4000K	80+			50,000	-	Yes	Damp	Requires Driver	
G13	16	82346	LED18T8/3/850	10	36	1800	5000K	80+			50,000	-	Yes	Damp	Requires Driver	
Remote Plastic 2 ft LED Tubes (Operates on Remote Driver)																
G13	8	65706	LED9T8/2/835	20	24	1000	3500K	80+			50,000	Yes	Yes	Damp	Requires Driver	
G13	8	65707	LED9T8/2/840	20	24	1100	4000K	80+			50,000	Yes	Yes	Damp	Requires Driver	
G13	8	65711	LED9T8/2/850	20	24	1100	5000K	80+			50,000	Yes	Yes	Damp	Requires Driver	
G13	8	92997	LED9T8/2/865	20	24	1000	6500K	80+			50,000	-	Yes	Damp	Requires Driver	

Lightech Drivers - Non Dimming

GE Product Code	Description	# of Lamps
93100	LED9T8/DR/UN/2L	2
76289	LED12T8/DR/2L	2
38970	LED15T8/DR/UN/2L	2
82347	LED18T8/DR/UN/2L	2
94384	LED21T8/DR/1L	1
94385	LED21T8/DR/2L	2

Lightech Drivers - Dimming

GE Product Code	Description	# of Lamps
76290	LED12T8/DR/D2L	2
76318	LED12T8/DR/4DL	4
38974	LED15T8/DR/D2L	2
38975	LED15T8/DR/4DL	4
88141	LED18T8/DR/D2L	2
88139	LED18T8/DR/4DL	4
60041	LED21T8/DR/D/2L	2
34016	LED21T8/DR/VLC/2L	2
62030	LED21T8/DR/D/4L	4

General Characteristics - Non Dimming

GE Product Code	76289	38970	82347	94384	94385
Output Current (A)	0.21*2	0.44*2	0.53*2	0.62	0.62*2
Input Watt (Max)	24	30	36	21	42
Input Voltage (V)	120-277V				
Input Frequency (Hz)	50/60Hz				
Efficiency (%)	> .9%				
Output Type	DC				
Output Volt Range	26-34V				
Dimmability	None				
Ambient Temp Min	-4°F				
Ambient Temp Max	113°F				
Case Temperature	158°F				

General Characteristics - Dimming

GE Product Code	88141	76290	38974	60041	34016	38975	62030	76318	88139
Output Current (A)	0.53*2	0.21*2	0.44*2	0.62*2	0.62*2	0.44*4	0.62*4	0.21*4	0.53*4
Input Watt (Max)	36	24	30	42	42	60	84	48	72
Input Voltage (V)	120-277V								
Input Frequency (Hz)	50/60Hz								
Efficiency (%)	> .9%								
Output Type	DC								
Output Volt Range	26-34V								
Dimmability	0-10V								
Ambient Temp Min	-4°F								
Ambient Temp Max	113°F								
Case Temperature	158°F								

Dimensions - Non Dimming

GE Product Code	82347	76289	38970	94384	94385
Weight	1.01	1.01	1.01	1.01	1.01
Casing Length (in)	9.5				
Casing Width (in)	1.3				
Casing Height (in)	1				
Lead Exit Length (in)	26				
Input Wire Length (in)	36				
Output Wire Length (in)	38				

Dimensions - Dimming

GE Product Code	76290	38974	34016	60041	38975	62030	76318
Weight	1.01			1.08			
Casing Length (in)	9.5						
Casing Width (in)	1.3						
Casing Height (in)	1						
Lead Exit Length (in)	26					26	
Input Wire Length (in)	36						
Output Wire Length (in)	38						



Product is compliant with material restriction requirements of RoHS



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2016 GE.

LEDL016 (Rev 10/27/16)