

ACCUPRO®

FEATURES

INTENDED USE

For field or factory installation in T5, T5HO, T8, T8HO and long-compact fixtures utilizing low-profile ballast and wireways. Suitable for indoor and damp locations and for sealed and gasketed fixtures, including fixtures rated for wet locations. Provides 90 minutes of emergency operation at a reduced light level.

CONSTRUCTION

Galvanized steel, low-profile housing works in conjunction with low-profile or standard size electronic ballasts to convert new or existing standard or high output T5 and T8 fluorescent fixtures into emergency lighting. Dual-voltage input capability (120V or 277V).

PERFORMANCE

Operates one 14-28W standard or 24-54W high output T5; one 17-40W standard or 44-55W high output T8; or one 36-55W (4-pin) long compact fluorescent lamp. Compatible with most one, two, three, or four-lamp electronic, standard, energy-saving and dimming AC ballasts.

Emergency ballast wires two ways: on night light circuit (permanently energized) or on switchable circuit (unswitched circuit to battery charger and switched circuit to the fixture ballast). Emergency ballast will strike "normally off" lamp. Produces 600-1325 lumens initial emergency light output.

SELF DIAGNOSTICS

Automatic testing for 30 seconds every 30 days and 90 minutes once a year. If a problem is detected, the status indicator light flashes and, if selected, an audible alarm sounds.

BATTERY

Sealed, maintenance-free, high-temperature, nickel-cadmium battery. Ensures long life over wide temperature ranges. Automatic battery recharge after 90-minute discharge. 24-hour recharge time.

Pilot light and single-pole test switch provide visual and manual means of monitoring system operation.

ELECTRONIC

Constant current-type charger.

High-efficiency, push-pull inverter is the most effective method of converting DC power to AC power. It provides maximum light output, battery life and reliability.

INSTALLATION

Low-profile size (21.5"L x 1.18"W x 1.18"H) (22.5"L for MVOLT SD model) allows mounting in lighting fixtures with limited space inside fixture wireway for clear appearance and protection against vandalism. Mounting centers 21" for standard model or 22.1" for MVOLT SD model.

Test switch and pilot light included.

Catalog Number

Notes


Type



Low-Profile Emergency Ballast

Damp Location Listed

PSL600

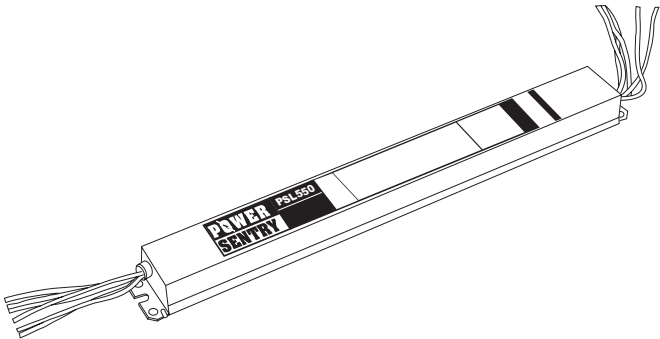

H- 1.18"

W- 1.18"

L- 21.5" (Standard)

L- 22.5" (MVOLT SD option)

LISTING

UL Listed. Meets UL 924, NFPA 101 (Current Life Safety Code), NEC and OSHA illumination standards. Suitable for factory or field installation in indoor and dry locations and for sealed and gasketed fixtures including fixtures rated for wet locations. Temperature rating 32 °F (0°c) to 122°F (50°c).

WARRANTY

Five-year warranty

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: PSL600

PSL600			
Designation		Options	
PSL600	Low-profile emergency ballast for standard and high-output T5 and T8 lamps	MVOLT SD	120V-277V input; 50/60 Hz with self diagnostics

Accessories*

Order as separate item.

ELA RTS3 Remote test switch pilot light

* See Inverter Accessories specification sheets for details on other compatible devices.

PSL600 Low-Profile Emergency Ballast

SPECIFICATIONS

BATTERY

Sealed Nickel-Cadmium

Shelf life ^①	Expected life ^①	Maintenance	Optimum temperature ^②
3 years	7–10 years	none ^③	32–100°F

Notes:

- ① At 77°F.
- ② Optimum ambient temperature range where unit will provide capacity for 90 minutes. Higher and lower temperatures affect life and capacity. Consult factory for detailed information.
- ③ Periodic system status test recommended.

ELECTRICAL (Standard)

Maximum AC Input		
Volts	Amps	Watts
120	.18	3.5
277	.18	3.5

M VOLT SD model

Volts	Amps	Watts
120	.55	5.0
277	.55	5.0

LAMP COMPATIBILITY

Type	Description	Length	Wattage
Linear	T5/T5HO	24" - 48"	14-54
	T8/T8HO	24" - 48"	17-55
Long Compact (4-pin)	N/A	N/A	36-55


INITIAL LUMEN OUTPUT TABLE*

Type	Description	1 Lamp (lm)
T5/T5HO	FP54, F54T5/HO	1250
	FP39, F39T5/HO	1125
	FP24, F24T5/HO	725
	FP28, F28T5	1250
	FP21, F21T5	1025
	FP14, F14T5	750
T8	F32T8 (4')	1100
	F40T8 (5')	1325
	F48 T8/ HO (4') (44W)	1100
	F17 T8	650
	F25 T8	750
CFL	PL-L 50W, F50BX/RS, Dulux L 55W	1050*
	PL-L 40W, F40/30BX/RS, Dulux L 40W	925*
	PL-L 36W, F39/36BX/RS, Dulux L 36W	900*

* Initial lumen output measured at 25°C ambient temperature

MOUNTING

All dimensions are inches (millimeters).



Cross section end view

Length: 21.5" (546.1) (Standard) 22.5" (MVOLT SD)
Shipping weight: 3.1 lbs.

ACCUPRO®