



CC579TP	
Ballast Type	Magnetic
Starting Method	Preheat Start
Lamp Connection	
Input Voltage	120Vac +5% -10%
Input Frequency	60Hz

ELECTRICAL SPECIFICATIONS:

Lamp Type	No. of Lamp	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %
F8T5	1	9.0	0.14	0.55	1.61	0.82	9.11	15
CFT7W/G23	1	9.0	0.15	0.52	1.57	0.87	9.67	15
CFT9W/G23	1	9.0	0.15	0.54	1.58	0.75	8.33	15

PERFORMANCE:


- Sound Rated: A
- Minimum Starting Temperature: 50°F, 10°C
- Maximum Ballast Case Temperature: 194°F, 90°C

APPROVALS:


- UL & cUL 935 Listed (Class P, Outdoor, Type 1)
- Thermally Protected

PHYSICAL DIMENSIONS:

Length (L):	2.75"
Width (W):	1.50"
Height (H):	1.20"
Mounting (M):	2.25"
Lead Length:	
Black	12" X 12"



WIRING DIAGRAM:

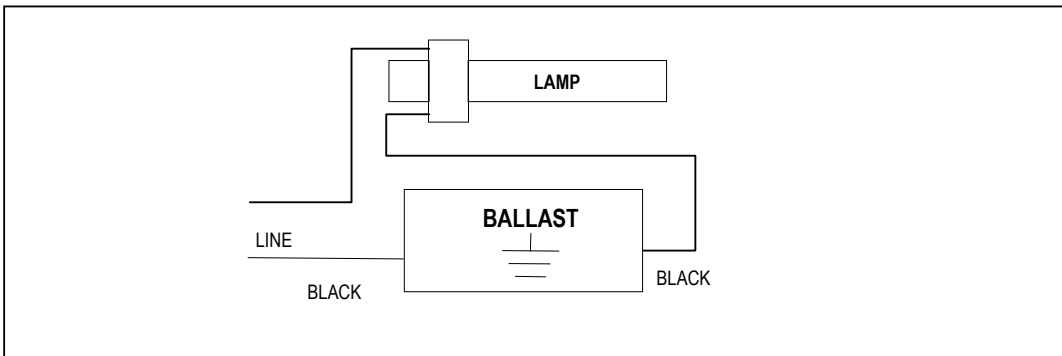

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM