



KTSB-E-0432-14-UV	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120 ~ 277Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

Electronic Sign Ballast for 4,3,2,and 1 T12HO lamps up to 8ft long or any combination thereof from 4-32 ft.

Electronic Sign Ballast for 4,3,2 and 1 T8HO lamps up to 6ft long or any combination thereof from 4-24 ft.

ELECTRICAL SPECIFICATIONS:

Lamp		Lamp Footage		Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Max. THD %
Type	#	Min	Max						
T12HO (F96T12/HO)	4,3,2,1	4	32	120	267	2.40	>0.90	<1.7	10
T12HO (F96T12/HO)	4,3,2,1	4	32	277	267	1.00	>0.90	<1.7	10
T8HO (F72T8/HO)	4,3,2,1	4	24	120	244	2.20	>0.90	<1.7	10
T8HO (F72T8/HO)	4,3,2,1	4	24	277	242	0.90	>0.90	<1.7	10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: -20 , -29
- Maximum Case Temperature: 194 , 90
- Meets FCC Part 18 (Class A) Non Consumer Limits


APPROVALS:

- UL, cUL 935 Listed


PHYSICAL DIMENSIONS:

Length (L): 11.65"
Width (W): 3.15"
Height (H): 1.85"
Mounting (M): 11.0"

Lead Length:
White, Black: 24"
Blue, Red, Yellow, Yellow/Black: 120"

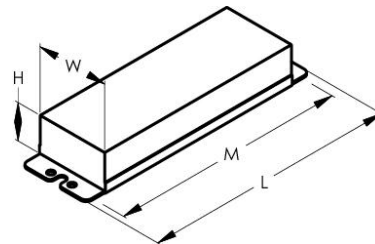

WIRING DIAGRAM:

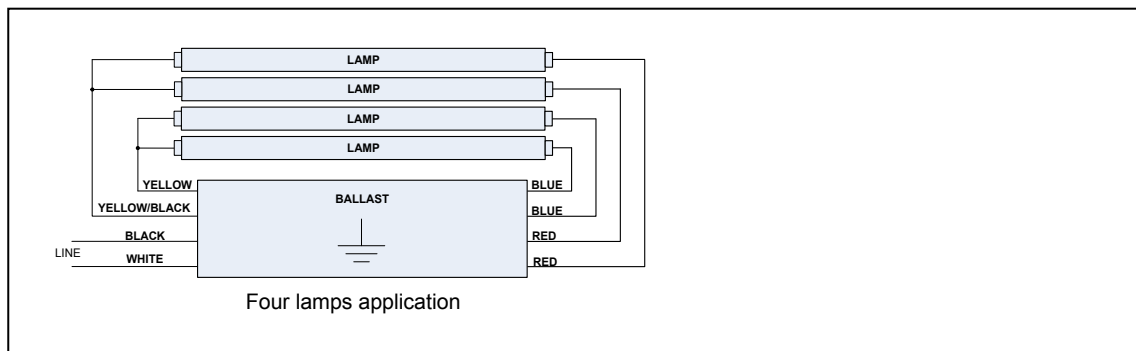

Keystone Technologies LLC.
P.O. Box 246, Ambler, Pennsylvania 19002
Phone: 215 -283 -2600
Fax: 215 -628 -4412
Info@KeystoneBallast.com
www.KeystoneBallast.com