



PRODUCT FEATURES


STARTING METHOD: Rapid	INPUT VOLTAGE: 120VAC $\pm 10\%$	WARRANTY: 3 Years
LAMP CONNECTION: Series	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp end-of-life protected
- Ballast frequency for all listed lamps: 20KHz-33KHz or > 40KHz

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F21T5	1	120	20.5	0.30	0.57	1.45	0.80	3.90	130	F1-6, F1-16
F14T5	1	120	15.0	0.23	0.54	1.51	0.95	6.33	130	F1-6, F1-16
F13T5	1	120	14.0	0.22	0.53	1.55	0.95	6.79	130	F1-6, F1-16
F8T5	2	120	16.0	0.25	0.53	1.50	0.95	5.94	130	F2-11, F1-16
F6T5	2	120	14.0	0.22	0.53	1.50	1.00	7.14	130	F2-11, F1-16
CFQ13W/G24q	1	120	14.0	0.22	0.53	1.55	0.95	6.79	130	P1-1
CFTR13W/GX24q	1	120	14.0	0.22	0.53	1.55	0.95	6.79	130	P1-1

WIRING DIAGRAMS

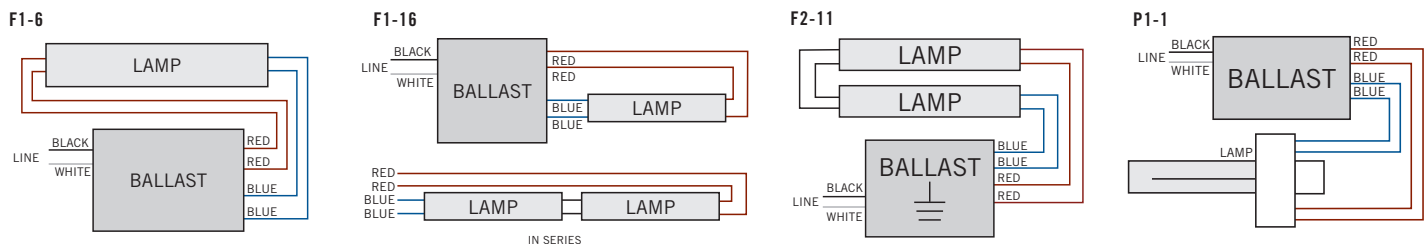




KTEB-114-1-TP-FC /M

T5 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

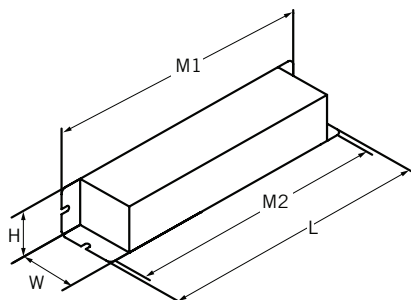

CASE DIMENSIONS


LENGTH: 5.90"
WIDTH: 0.91"
HEIGHT: 0.76"
MOUNTING: 5.60"
UNIT WEIGHT: 0.36 lbs

STANDARD LEAD LENGTHS*

BLACK: 10.00"
WHITE: 10.00"
BLUE: 26.00" X 26.00"
RED: 4.00" X 4.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

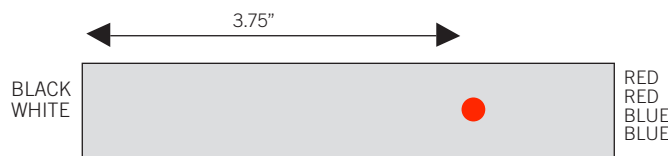

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-114-1-TP-FC/M-CP	Carton	120	QuickShip

CATALOG NUMBER BREAKDOWN

KTEB-114-1-TP-FC/M

Keystone Technologies Electronic Ballast	1 Lamp	14 Watts	120V Input	Thermally Protected	Finger Case	Wire Length
---	-----------	-------------	---------------	------------------------	----------------	----------------