



## PRODUCT FEATURES


|                               |                                         |                             |
|-------------------------------|-----------------------------------------|-----------------------------|
| <b>STARTING METHOD:</b> Rapid | <b>INPUT VOLTAGE:</b> 120VAC $\pm 10\%$ | <b>WARRANTY:</b> 3 Years    |
| <b>LAMP CONNECTION:</b> --    | <b>INPUT FREQUENCY:</b> 60 Hz           | <b>POWER FACTOR:</b> Normal |

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp end-of-life protected
- Ballast frequency for all listed lamps: 20KHz-33KHz

## ELECTRICAL SPECIFICATIONS

| LAMP TYPE          | NO. OF LAMPS | INPUT VOLTS | INPUT WATTS | INPUT CURRENT (AMPS) | POWER FACTOR | CREST FACTOR | BALLAST FACTOR | BALLAST EFFICACY FACTOR | MAX THD% | WIRING DIAGRAM |
|--------------------|--------------|-------------|-------------|----------------------|--------------|--------------|----------------|-------------------------|----------|----------------|
| CFQ26WG24q         | 1            | 120         | 24.0        | 0.40                 | 0.54         | <1.70        | 0.90           | 3.75                    | 150      | P1-1           |
| CFS28W/GR10q       | 1            | 120         | 26.0        | 0.40                 | 0.58         | <1.70        | 0.90           | 3.46                    | 130      | C1-2           |
| F32T8              | 1            | 120         | 32.0        | 0.45                 | 0.59         | <1.70        | 0.95           | 2.97                    | 130      | F1-8           |
| F25T8              | 1            | 120         | 25.0        | 0.37                 | 0.57         | <1.70        | 0.95           | 3.80                    | 130      | F1-8           |
| F19T5 (28" or 30") | 1            | 120         | 18.0        | 0.29                 | 0.52         | <1.70        | 1.00           | 5.56                    | 150      | F1-8           |
| F18T5 (24" or 26") | 1            | 120         | 17.0        | 0.27                 | 0.52         | <1.70        | 1.00           | 5.88                    | 160      | F1-8           |
| F17T8              | 1            | 120         | 18.0        | 0.27                 | 0.54         | <1.70        | 1.00           | 5.55                    | 150      | F1-8           |
| F15T8              | 1            | 120         | 16.0        | 0.26                 | 0.52         | <1.70        | 1.00           | 6.25                    | 150      | F1-8           |
| F13T8              | 1            | 120         | 16.0        | 0.26                 | 0.51         | <1.70        | 1.10           | 6.88                    | 160      | F1-8           |
| FC9T5              | 1            | 120         | 23.0        | 0.35                 | 0.55         | <1.70        | 1.05           | 4.57                    | 140      | C1-1           |

## WIRING DIAGRAMS

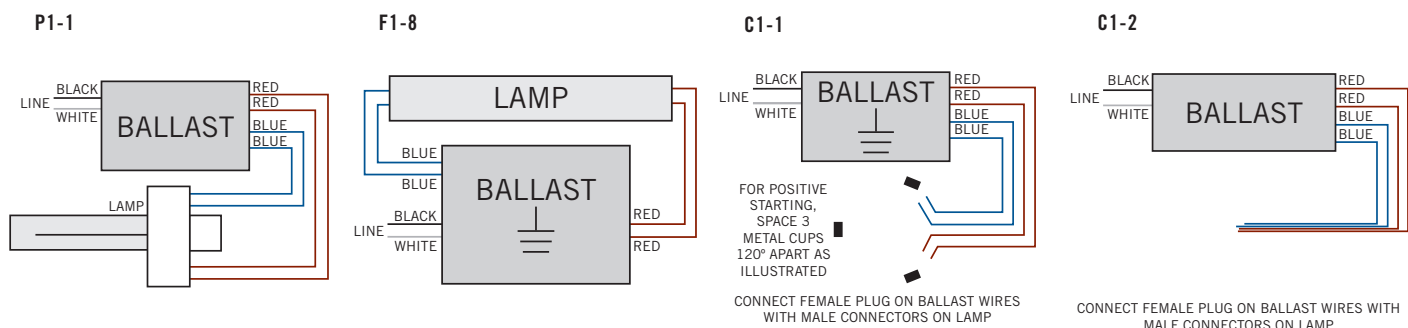




# KTEB-126-1-TP-LC

CFL ELECTRONIC FLUORESCENT

## CASE STYLE/DIMENSIONS

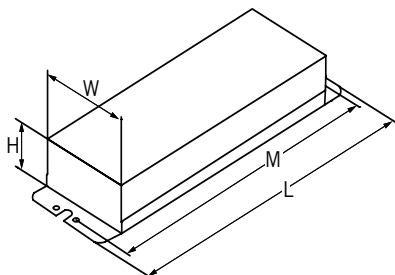

### CASE DIMENSIONS


|                       |
|-----------------------|
| LENGTH: 6.46"         |
| WIDTH: 1.89"          |
| HEIGHT: 1.15"         |
| MOUNTING: 6.00"       |
| UNIT WEIGHT: 0.81 lbs |

### STANDARD LEAD LENGTHS\*

|                       |
|-----------------------|
| BLACK: 25.00"         |
| WHITE: 25.00"         |
| BLUE: 29.00" X 29.00" |
| RED: 18.00" X 18.00"  |

\*Consult Keystone for special lead length requirements.

## HOT SPOT LOCATION

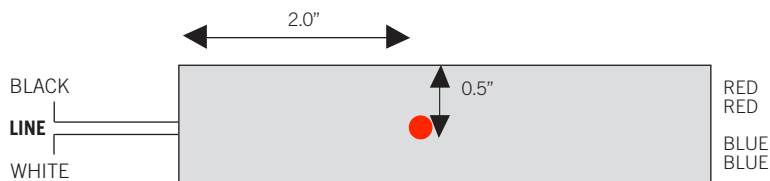

## ORDERING INFORMATION

| ORDER CODE       | PACKAGING STYLE | PACK QTY. | ITEM STATUS |
|------------------|-----------------|-----------|-------------|
| KTEB-126-1-TP-LC |                 | 1         | Active      |

## CATALOG NUMBER BREAKDOWN

# KTEB-126-1-TP-LC

|                                             |           |             |               |                        |              |
|---------------------------------------------|-----------|-------------|---------------|------------------------|--------------|
| Keystone Technologies<br>Electronic Ballast | 1<br>Lamp | 26<br>Watts | 120V<br>Input | Thermally<br>Protected | Long<br>Case |
|---------------------------------------------|-----------|-------------|---------------|------------------------|--------------|