



PRODUCT FEATURES


STARTING METHOD: Instant	INPUT VOLTAGE: 120-277VAC ±10%	WARRANTY: 5 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Ballast frequency for all listed lamps: > 40kHz
- OCV: 600V

ELECTRICAL SPECIFICATIONS


LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F32T8 32W	1	120	28.0	0.24	0.99	<1.70	0.87	3.11	<10	F1-9
		277	28.0	0.12	0.98	<1.70	0.87	3.11	<10	F1-9
F32T8 30W	1	120	26.0	0.22	0.99	<1.70	0.87	3.35	<10	F1-9
		277	26.0	0.11	0.98	<1.70	0.87	3.35	<10	F1-9
F32T8 28W	1	120	24.0	0.20	0.99	<1.70	0.87	3.63	<10	F1-9
		277	24.0	0.09	0.98	<1.70	0.87	3.63	<10	F1-9
F32T8 25W	1	120	23.0	0.19	0.99	<1.70	0.87	3.78	<10	F1-9
		277	23.0	0.09	0.98	<1.70	0.87	3.78	<10	F1-9
F25T8 25W	1	120	22.0	0.18	0.99	<1.70	0.89	4.05	<10	F1-9
		277	22.0	0.08	0.97	<1.70	0.89	4.05	<12	F1-9
F17T8 17W	1	120	16.0	0.13	0.99	<1.70	0.90	5.63	<10	F1-9
		277	16.0	0.07	0.96	<1.70	0.90	5.63	<12	F1-9

WIRING DIAGRAMS

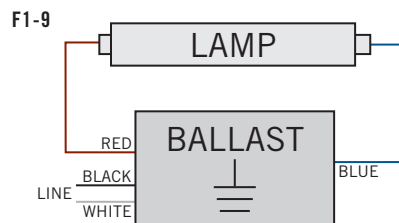

Instant Start T8 ballasts require the use of Shunted lampholders/sockets.

CASE STYLE/DIMENSIONS

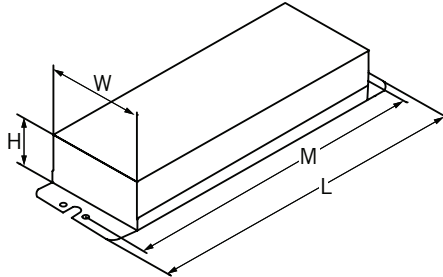

CASE DIMENSIONS


LENGTH: 9.50"
WIDTH: 1.16"
HEIGHT: 1.05"
MOUNTING: 8.90"
UNIT WEIGHT: 0.86 lbs

STANDARD LEAD LENGTHS*

BLACK: 25.00"
WHITE: 25.00"
BLUE: 31.00"
RED: 48.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

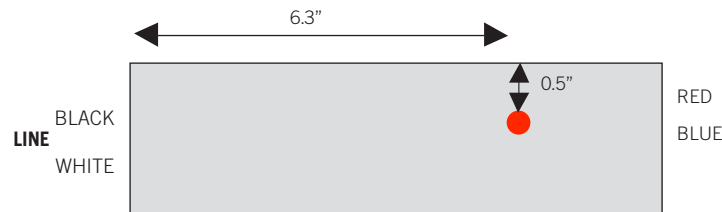

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-132-UV-IS-N-P-CP	Carton	50	Quick Ship
KTEB-132-UV-IS-N-P-DP	Carton	10	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-132-UV-IS-N-P

