



PRODUCT FEATURES


| | | |
|-------------------------------|--|-----------------------------|
| STARTING METHOD: Rapid | INPUT VOLTAGE: 120VAC \pm 10% | WARRANTY: 3 Years |
| LAMP CONNECTION: -- | INPUT FREQUENCY: 60Hz | POWER FACTOR: Normal |

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

| LAMP TYPE | NO. OF LAMPS | INPUT VOLTS | INPUT WATTS | INPUT CURRENT (AMPS) | POWER FACTOR | CREST FACTOR | BALLAST FACTOR | BALLAST EFFICACY FACTOR | MAX THD% | WIRING DIAGRAM |
|-----------|--------------|-------------|-------------|----------------------|--------------|--------------|----------------|-------------------------|----------|----------------|
| F21T5 HE | 1 | 120 | 22.0 | 0.34 | 0.53 | <1.70 | 1.00 | 4.54 | 140 | F1-6 |
| F28T5 HE | 1 | 120 | 27.0 | 0.40 | 0.55 | <1.70 | 0.92 | 3.41 | 135 | F1-6 |
| F35T5 HE | 1 | 120 | 33.0 | 0.48 | 0.57 | <1.70 | 0.88 | 2.67 | 125 | F1-6 |

WIRING DIAGRAMS

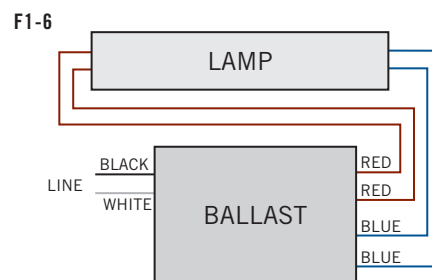




KTEB-135HE-1-TP /B

T5 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

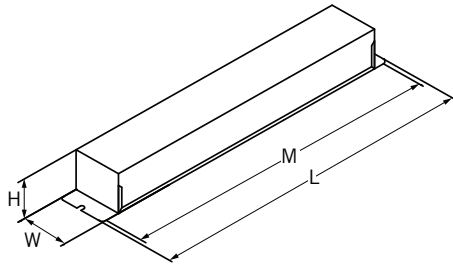

CASE DIMENSIONS


| |
|-----------------------|
| LENGTH: 9.00" |
| WIDTH: 0.95" |
| HEIGHT: 0.95" |
| MOUNTING: 8.75" |
| UNIT WEIGHT: 0.64 lbs |

STANDARD LEAD LENGTHS*

| |
|-----------------------|
| BLACK: 24.00" |
| WHITE: 24.00" |
| BLUE: 34.00" X 34.00" |
| RED: 46.00" X 46.00" |

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

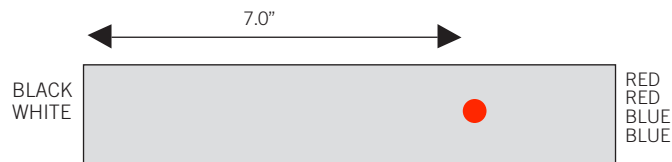

ORDERING INFORMATION

| ORDER CODE | PACKAGING STYLE | PACK QTY. | ITEM STATUS |
|----------------------|-----------------|-----------|-------------|
| KTEB-135HE-1-TP/B-CP | Carton | 50 | Quick Ship |

CATALOG NUMBER BREAKDOWN

KTEB-135HE-1-TP/B

