



PRODUCT FEATURES


STARTING METHOD: Program	INPUT VOLTAGE: 120-277VAC ±10%	WARRANTY: 5 Years
LAMP CONNECTION: Series	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Non-Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp end-of-life protected


ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F39T5/H0	2	120	90.0	0.78	0.99	1.70	1.00	1.11	10	F2-1
		277	89.0	0.34	0.99	1.70	1.00	1.12	10	F2-1
	1	120	46.0	0.39	0.99	1.70	1.03	2.23	10	F2-1
		277	47.0	0.18	0.97	1.70	1.06	2.25	12	F2-1
F24T5/H0	2	120	59.0	0.50	0.99	1.70	1.08	1.83	10	F2-1
		277	59.0	0.22	0.98	1.70	1.08	1.83	10	F2-1
	1	120	30.0	0.25	0.99	1.70	1.10	3.66	10	F2-1
		277	30.0	0.12	0.95	1.70	1.10	3.66	15	F2-1
FC12T5 40W	2	120	93.0	0.78	0.99	1.70	1.02	1.09	10	F2-1
		277	92.0	0.34	0.98	1.70	1.01	1.09	10	F2-1
	1	120	49.0	0.41	0.99	1.70	1.07	2.18	10	F2-1
		277	50.0	0.19	0.97	1.70	1.10	2.18	12	F2-1
FC9T5 22W	2	120	63.0	0.53	0.99	1.70	1.25	1.98	10	F2-1
		277	63.0	0.23	0.98	1.70	1.25	1.98	10	F2-1
	1	120	33.0	0.28	0.99	1.70	1.31	3.97	10	F2-1
		277	33.0	0.13	0.95	1.70	1.31	3.97	12	F2-1
FT36W/2G11	2	120	72.0	0.60	0.99	1.70	0.87	1.20	10	F2-1
		277	71.0	0.26	0.98	1.70	0.87	1.22	10	F2-1
	1	120	38.0	0.32	0.99	1.70	0.92	2.42	10	F2-1
		277	38.0	0.14	0.99	1.70	0.92	2.42	10	F2-1
FT24W/2G11	2	120	54.0	0.45	0.99	1.70	0.99	1.83	10	F2-1
		277	55.0	0.20	0.98	1.70	0.99	1.80	10	F2-1
	1	120	30.0	0.25	0.99	1.70	1.09	3.63	10	F2-1
		277	30.0	0.12	0.95	1.70	1.09	3.63	15	F2-1
F40W/2G11	1	120	50.0	0.42	0.99	1.70	1.09	2.18	10	F2-1
		277	50.0	0.19	0.97	1.70	1.09	2.18	12	F2-1
(1)FC9T5+(1)FC12T5	2	120	68.0	0.57	0.99	1.70	0.96	1.41	10	F2-1
		277	68.0	0.25	0.98	1.70	0.96	1.41	10	F2-1

WIRING DIAGRAMS

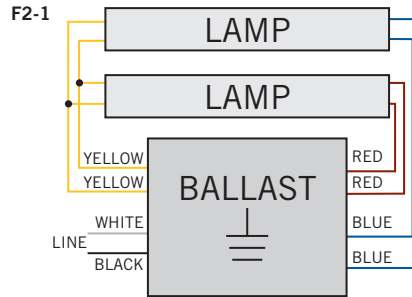

CASE STYLE/DIMENSIONS

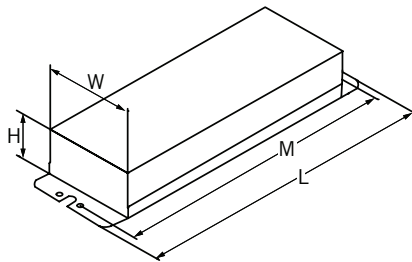

CASE DIMENSIONS


LENGTH: 9.45"
WIDTH: 1.35"
HEIGHT: 1.06"
MOUNTING: 8.58"
UNIT WEIGHT: 1.03 lbs

STANDARD LEAD LENGTHS*

BLACK: 24.00"
WHITE: 24.00"
BLUE: 28.00" X 28.00"
RED: 28.00" X 28.00"
YELLOW: 44.00" X 44.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

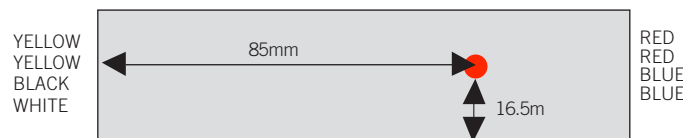

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-239HO-UV-PS-SL-CP	Carton	40	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-239HO-UV-PS-SL

