



<b>KTEB-275-UV-TP-PIC-SL</b>	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120 ~ 277Vac ± 10%
Input Frequency	60Hz / 50Hz

**ELECTRICAL SPECIFICATIONS:**

Lamp Type	No. of Lamp	Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD %	
F96T12 75W	2	120	133	1.12	0.99	<1.7	0.88	0.66	10	
		277	133	0.48	0.99	<1.7	0.88	0.66	10	
	1	120	82	0.68	0.99	<1.7	1.05	1.28	10	
		277	82	0.31	0.97	<1.7	1.05	1.28	10	
F96T12/ES 60W	2	120	117	0.98	0.99	<1.7	0.88	0.75	10	
		277	117	0.42	0.98	<1.7	0.88	0.75	10	
	1	120	72	0.60	0.99	<1.7	1.05	1.46	10	
		277	72	0.27	0.96	<1.7	1.05	1.46	10	
	F72T12 57W	2	120	107	0.92	0.99	<1.7	0.90	0.84	10
			277	107	0.40	0.95	<1.7	0.90	0.84	10
1		120	67	0.60	0.99	<1.7	1.05	1.57	10	
		277	67	0.26	0.95	<1.7	1.05	1.57	10	
F48T12 40W	2	120	76	0.68	0.99	<1.7	0.92	1.21	10	
		277	76	0.30	0.95	<1.7	0.92	1.21	10	
F48T12/ES 30W	2	120	64	0.60	0.99	<1.7	0.92	1.44	10	
		277	64	0.26	0.95	<1.7	0.92	1.44	10	

**PERFORMANCE:**

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class A) Consumer Limits
- Transient Protection meets ANSI/IEEE C62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- 3-Year Warranty


**APPROVALS:**

- UL, cUL 935 Listed


**PHYSICAL DIMENSIONS:**

Length (L):	9.50"
Width (W):	1.80"
Height (H):	1.38"
Mounting (M):	9.00"

**WIRING DIAGRAM:**

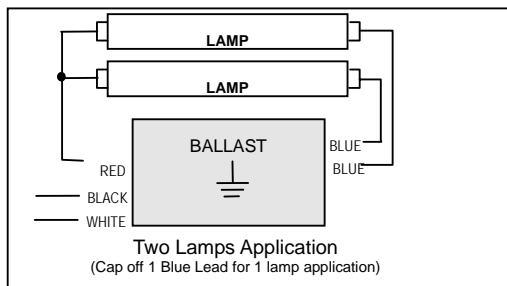

**Hot Spot Location:**

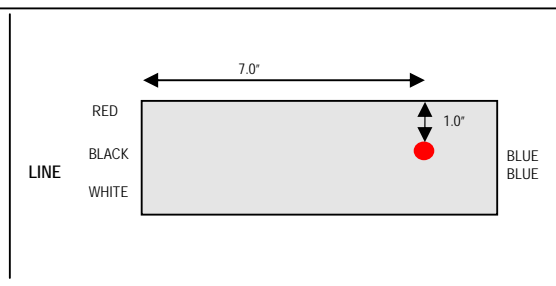

**KEYSTONE TECHNOLOGIES LLC.**  
P.O. Box 246, AMBLER, PENNSYLVANIA 19002  
PHONE: 215-283-2600  
FAX: 215-628-4412  
INFO@KEYSTONEBALLAST.COM  
WWW.KEYSTONEBALLAST.COM