



PRODUCT FEATURES

STARTING METHOD: Rapid	INPUT VOLTAGE: 120VAC ±10%	WARRANTY: 3 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: Normal


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS


LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F32T8	2	120	62.0	0.89	0.58	1.58	0.90	1.45	130	F2-20, F2-22
	1	120	33.0	0.53	0.52	1.40	0.90	2.73	130	F2-20, F2-22
F25T8	2	120	47.0	0.70	0.55	1.55	0.95	2.02	150	F2-20, F2-22
	1	120	24.0	0.42	0.49	1.47	0.95	3.96	150	F2-20, F2-22
F17T8	2	120	36.0	0.57	0.53	1.55	0.95	2.64	160	F2-20, F2-22
	1	120	19.0	0.34	0.46	1.61	0.95	5.00	160	F2-20, F2-22
F15T8	2	120	29.0	0.48	0.50	1.69	0.95	3.28	160	F2-20, F2-22
	1	120	15.0	0.29	0.45	1.55	0.95	6.33	160	F2-20, F2-22

WIRING DIAGRAMS

F2-20

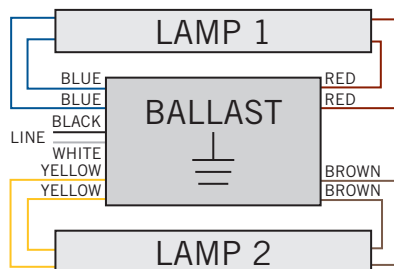


F2-22

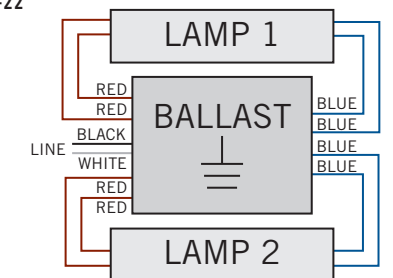

CONNECT WIRES FROM TOP SIDE OF BALLAST TO LAMP 1
CONNECT WIRES FROM BOTTOM SIDE OF BALLAST TO LAMP 2

CASE STYLE/DIMENSIONS

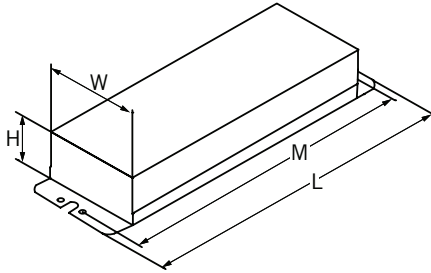

CASE DIMENSIONS


LENGTH: 6.46"
WIDTH: 1.89"
HEIGHT: 1.00"
MOUNTING: 6.00"
UNIT WEIGHT: 0.83 lbs

STANDARD LEAD LENGTHS*

BLACK: 10.00"
WHITE: 10.00"
BLUE: 30.00" X 30.00"
RED: 14.00" X 14.00"
BROWN: 14.00" X 14.00"
YELLOW: 30.00" X 30.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

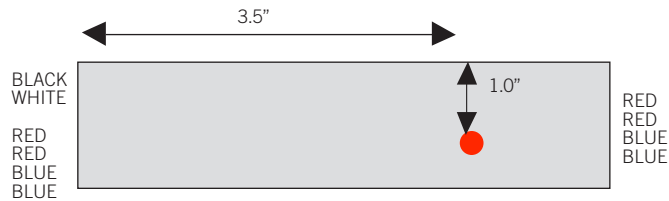

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-2C72-1-TP-CP	Carton	40	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-2C72-1-TP

