



KTSB-E-0216-12-UV	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120 ~ 277Vac $\pm$ 10%
Input Frequency	60Hz / 50Hz

Electronic Sign Ballast for 2, and 1 T12HO lamps up to 8ft long or any combination thereof from 2-16 ft.

Electronic Sign Ballast for 2, and 1 T8HO lamps up to 6ft long or any combination thereof from 4-12 ft.

ELECTRICAL SPECIFICATIONS:

Lamp		Lamp Footage		Volts	Input Watts	Input Current (Amps)	Power Factor	Crest Factor	Max. THD %
Type	#	Min	Max						
T12HO (F96T12/HO)	2,1	2	16	120	131	1.20	>0.90	<1.7	10
T12HO (F96T12/HO)	2,1	2	16	277	132	0.50	>0.90	<1.7	10
T8HO (F72T8/HO)	2,1	4	12	120	122	1.10	>0.90	<1.7	10
T8HO (F72T8/HO)	2,1	4	12	277	121	0.45	>0.90	<1.7	10

PERFORMANCE:

- Sound Rated: A
- Minimum Starting Temperature: -20°F, -29°C
- Maximum Case Temperature: 194°F, 90°C
- Meets FCC Part 18 (Class A) Non Consumer Limits


APPROVALS:

- UL, cUL 935 Listed


PHYSICAL DIMENSIONS:

Length (L): 9.50"
Width (W): 2.36"
Height (H): 1.70"
Mounting (M): 8.90"


Lead Length:
White, Black 24"
Blue, Red 96"

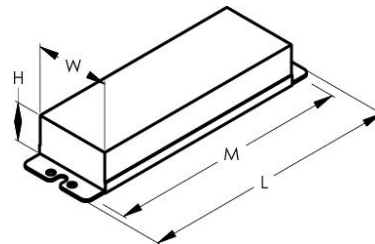

WIRING DIAGRAM:

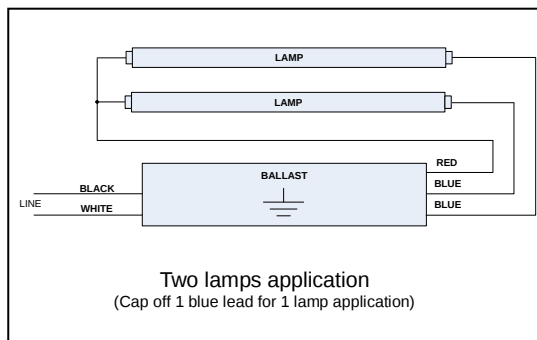

Hot Spot Location:

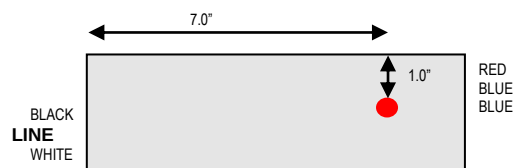

KEYSTONE TECHNOLOGIES LLC.
P.O. Box 246, AMBLER, PENNSYLVANIA 19002
PHONE: 215-283-2600
FAX: 215-628-4412
INFO@KEYSTONEBALLAST.COM
WWW.KEYSTONEBALLAST.COM