



PRODUCT FEATURES

- ANSI Designation: M132 or M154
- Line Voltage: 120/208/240/277/480
- Regulation: 10%
- Frequency: 60 Hz
- Recommended Fuse (A): 8/6/5/3/3
- Circuit Type: CWA
- Insulation Class: 180°C
- Capacitor Value: 21 MF
- Capacitor Voltage Rating: 345 V
- Capacitor Temperature Rating: 90°C
- Winding Materials: Cu/Al
- Lamp Starter: XG-04
- Agency Certification: RU, cRU
- Maximum Distance to Lamp: N/A
- 2 Year Warranty

LAMP TYPE: 320W MH-PS

INPUT VOLTAGE: 5 Tap (120/208/240/277/480)



CIRCUIT TYPE: CWA

ELECTRICAL SPECIFICATIONS


LINE VOLT (V)	POWER FACTOR	LINE CURRENT			INPUT POWER (W)	OPEN CIRCUIT VOLTAGE (V)	MINIMUM START TEMP	UL TEMP CODE	WIRING DIAGRAM
		OPERATING	OPEN	START					
120	High	3.07	2.81	2.25	362	291	-30°C	A	H9
208	High	1.77	1.63	1.31	362	291	-30°C	A	H9
240	High	1.53	1.40	1.14	362	291	-30°C	A	H9
277	High	1.33	1.22	0.98	362	291	-30°C	A	H9
480	High	0.77	0.70	0.54	362	291	-30°C	C	H9

WIRING DIAGRAMS

DIAGRAM H9

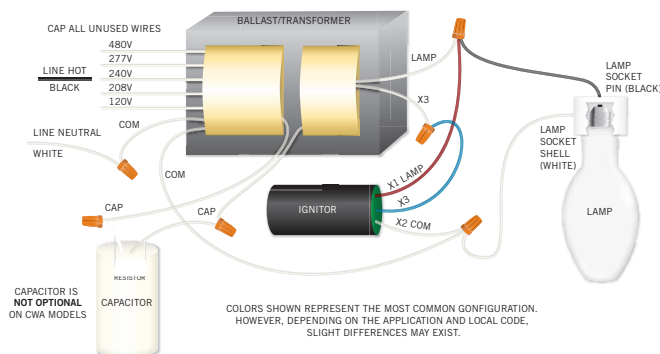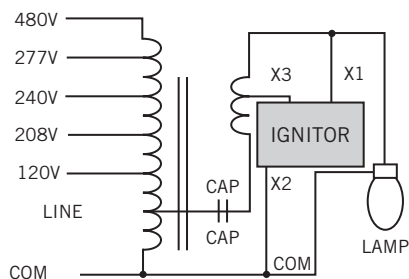

CASE STYLE/DIMENSIONS

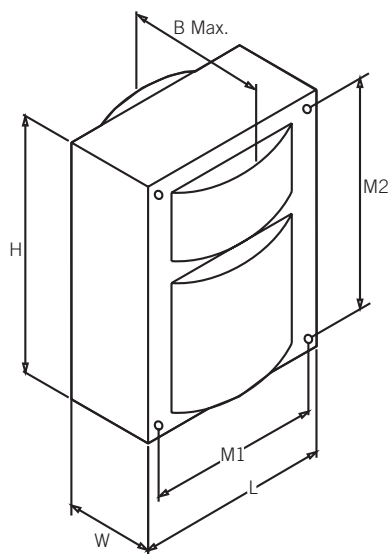

OVERALL DIMENSIONS

LENGTH: 4.25"
WIDTH: 1.82"
HEIGHT: 4.75"
B MAX: 4.13"

MOUNTING HOLES


DIAMETER: 0.25"
M1: 3.87"
M2: 4.38"

BRACKET DIMENSIONS

LENGTH: 7.25"
WIDTH: 1.11"


LEAD LENGTH: 12-14"

BALLAST NET WEIGHT: 9.92 lbs



CAPACITOR INFO

WATTAGE: 320
MICROFARAD: 21
VOLTAGE: 345V
TYPE: Dry Film



IGNITOR INFO

LAMP TYPE: Pulse Start Metal Halide
WATTAGE: 320
TYPE:

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
MPS-320A-P-KIT		1	Quick Ship
*Kit Includes: Pre-Wired Ballast, Capacitor, Ignitor, Mounting Brackets, Mounting Hardware			

CATALOG NUMBER BREAKDOWN

MPS - 320A - P - KIT

Pulse Start Metal Halide	Input Power	CWA Circuit	120/208/ 240/277/ 480V, 5 Tap	HID Replacement Kit
-----------------------------	----------------	----------------	-------------------------------------	---------------------------