


Diva 0–10 V Controls

Controls for 0–10 V LED drivers and fluorescent ballasts.

Features

- Large paddle switch with a captive linear-slide control for a standard designer-opening wallplate.
- 0–10 V control link controls third party fixtures.
- DVSTV- wires as single pole or 3-way, 120–277 V $\sim$ switch.
- DTV- wires as a 24 V $\equiv$ switch. A power pack is required to switch 120–277 V $\sim$ and 347 V $\sim$.
- Patented switching technology extends product lifetime.
- Coordinating Claro and Satin Colors wallplates¹ (available separately).
- High-end and low-end trim user is adjustable for optimal performance.

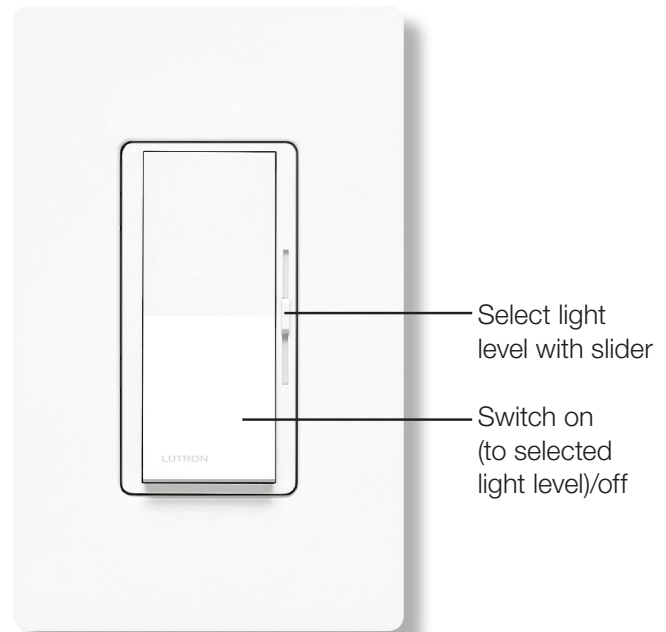

Diva 0–10 V Control

Model Numbers

Model Number	Operating Voltage	Wiring	Load Switching Capacity	0–10 V Sink Capacity
DVSTV-XX ²	120–277 V $\sim$	Single pole / 3-way ⁵	8 A	50 mA
DVSCSTV-YY ⁴				
DVSTV-453PH-WH ¹	120–277 V $\sim$	Single pole / 3-way ⁵	450 W	50 mA
DVSTV-453PH-WH-C ^{1,3}			3.75 A (120 V $\sim$) 1.62 A (277 V $\sim$)	
DVTV-XX ²	24 V $\equiv$	Single pole / 3-way ⁷	0 A ⁶	30 mA
DVSCTV-YY ⁴				

¹ DVSTV-453PH-WH and DVSTV-453PH-WH-C available in white gloss only.

² “XX” in the model number represents gloss finish color code. See **Standard Colors and Finishes** on Page 5.

³ Clamshell packaged product for Canada.

⁴ “YY” in the model number represents satin finish color code. See **Standard Colors and Finishes** on Page 5.

⁵ For 3-way switching, use Claro switches or other mechanical switches.

⁶ A Lutron power pack (PP-DV or PP-347H) is required for switching ballasts and drivers. For Lutron power pack specification, please see Lutron P/N 369544 at www.lutron.com

⁷ 24 V $\equiv$ single-pole double-throw (SPDT) switch, supplied by others, must be rated for dry contacts.

Job Name: 	Model Numbers: 	
Job Number:		

Specifications

DVSTV- Models

Regulatory Approvals

- cULus Listed
- NOM

Power

Operating Voltage

120–277 V~ 50/60 Hz

Output Ratings

- Switch rating of 8 A.
- 0–10 V control link for 50 mA maximum output (sink only).

0–10 V Control Link

- 0–10 V control link is Class 1.
- Controls up to 25 ballasts or drivers (IEC 60929 Annex E.2 requires the ballast/driver to limit the current draw to 2.0 mA maximum).

Performance

- Power pack cannot be used with DVSTV- models.
- Works with all ballasts and drivers that provide a current source compliant to IEC 60629 Annex E.2, and whose inrush current does not exceed NEMA410 standards for electronic ballast/driver loads of 8 A steady state current.
- Adjustable high-end and low-end trim for optimal dimming performance.
- Power failure memory: should power be interrupted, the control will return to its previously set level prior to the interruption when power is restored.
- Captive linear slider.
- Precise color matching.

Environment

- For indoor use only.
- Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0% to 90% humidity, non-condensing.

Application Requirements

- No derating required if ganged.
- Night light not available.
- Always consult local wiring codes.

Warranty

- www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Job Name: 	Model Numbers: 	
Job Number:		

Specifications (continued)**DVSTV-453PH-WH Model****Regulatory Approvals**

- cULus Listed
- NOM

Power**Operating Voltage**

120–277 V~ 50/60 Hz

Output Ratings

- Switch rating of 450 W.
- 0–10 V control link for 50 mA maximum output (sink only).

0–10 V Control Link

- 0–10 V control link is Class 1.
- Controls up to 25 ballasts or drivers (IEC 60929 Annex E.2 requires the ballast/driver to limit the current draw to 2.0 mA maximum).

Performance

- Power pack cannot be used with DVSTV- models.
- Works with all ballasts and drivers that provide a current source compliant to IEC 60629 Annex E.2, and whose inrush current does not exceed NEMA410 standards for electronic ballast/driver loads of 8 A steady state current.
- Adjustable high-end and low-end trim for optimal dimming performance.
- Power failure memory: should power be interrupted, the control will return to its previously set level prior to the interruption when power is restored.
- Captive linear slider.
- Precise color matching.

Environment

- For indoor use only.
- Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0% to 90% humidity, non-condensing.

Application Requirements

- No derating required if ganged.
- Night light not available.
- Always consult local wiring codes.

Warranty

- www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Job Name:	Model Numbers:
Job Number:	

Specifications (continued)**DVTV- and DVSCTV- Models****Power****Operating Voltage**24 V $\overline{=}$ 100 mA**Output Ratings**

- Power pack required for load switching. Power pack is rated for 16 A.
- 30 mA maximum output (sink only).

0–10 V Control Link

- 0–10 V control is Class 2.
- Controls up to 15 ballasts or drivers (IEC 60929 Annex E.2 requires the ballast/driver to limit the current draw to 2.0 mA maximum).

Performance

- For 120–277 V $\sim$ installations switching more than 8 A, use DVTV- with Lutron power pack (PP-DV). See Lutron P/N 369544 at www.lutron.com.
- For 347 V $\sim$ installations, use DVTV- with Lutron power pack (PP-347H) See Lutron P/N 369544 at www.lutron.com.
- Works with all ballasts and drivers that provide a current source compliant to IEC 60629 Annex E.2.
- Adjustable high-end and low-end trim for optimal dimming performance.
- Power failure memory: should power be interrupted, the 0–10 V $\overline{=}$ signal will return to its previously set level prior to the interruption when power is restored.
- Captive linear slider.
- Precise color matching.

Environment

- For indoor use only.
- Ambient operating temperature: 32 °F to 104 °F (0 °C to 40 °C), 0% to 90% humidity, non-condensing.

Application Requirements


- No derating required if ganged.
- Night light not available.
- Always consult local wiring codes.

Warranty

- www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Job Name:	Model Numbers:
Job Number:	

Dimensions

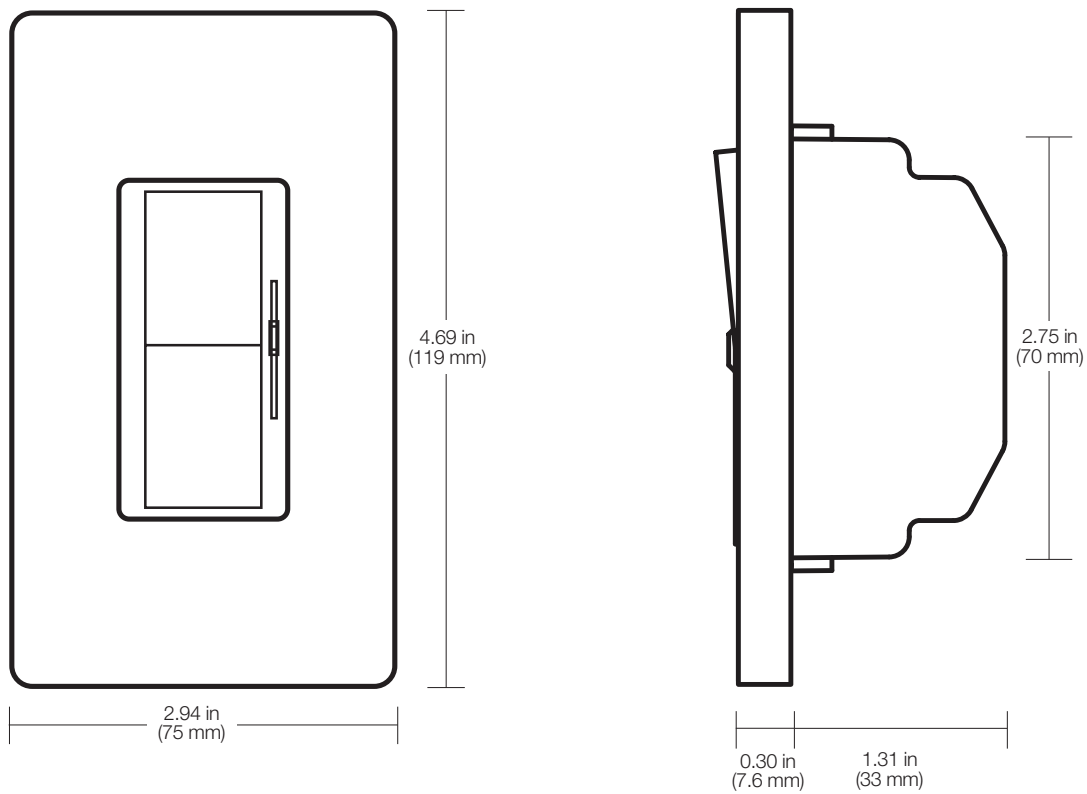

Standard Colors and Finishes

Gloss Finishes*

Add color suffix to model number

Example: DVSTV-WH

WH	White
IV	Ivory
AL	Almond
LA	Light Almond
GR	Gray
BR	Brown
BL	Black

Satin Colors*

Add color suffix to model number

Example: DVSCTV-SW

SW	Snow	MN	Midnight
TP	Taupe	BI	Biscuit
ES	Eggshell	PD	Palladium
HT	Hot	MR	Merlot
PL	Plum	SI	Sienna
TC	Terracotta	BG	Bluestone
GB	Green Briar	GS	Goldstone
MS	Mocha Stone	ST	Stone
DS	Desert Stone	LS	Limestone

* DVSTV-453PH-WH and DVSTV-453PH-WH-C available in white gloss only.

For the latest color offerings please see our website:
<http://www.lutron.com/satincolors>

LUTRON SPECIFICATION SUBMITTAL


Page

Job Name:	Model Numbers:
Job Number:	

High-End and Low-End Adjustments

DVSTV- Models


Bottom View

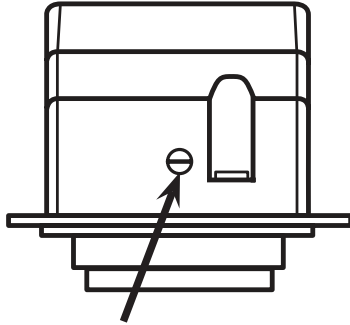

Maximum Light Level
(High-End) Trim

All Models


Front View

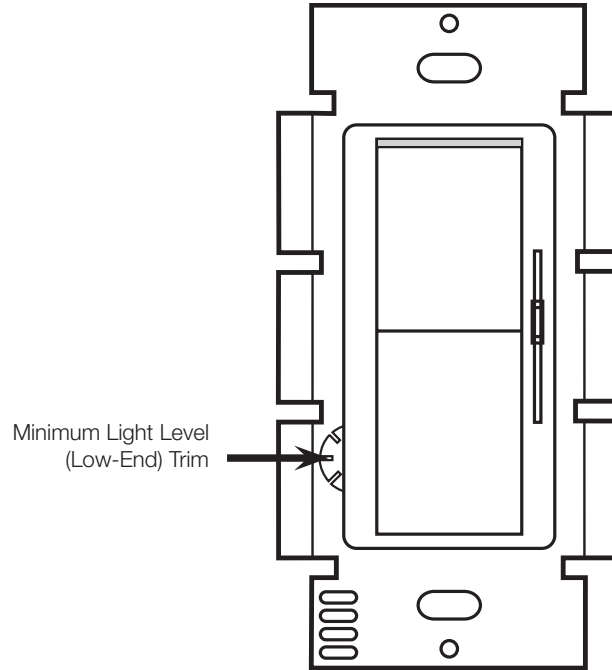

Minimum Light Level
(Low-End) Trim

DVTV- and DVSCTV- Models

Side View

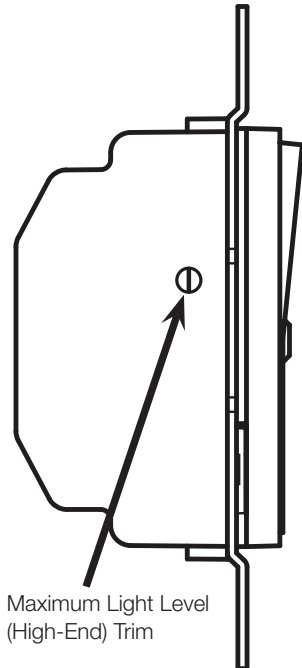


Maximum Light Level
(High-End) Trim

Job Name:	Model Numbers:
Job Number:	


Wiring Diagrams

DVSTV-/DVSCSTV-

Single Pole Wiring

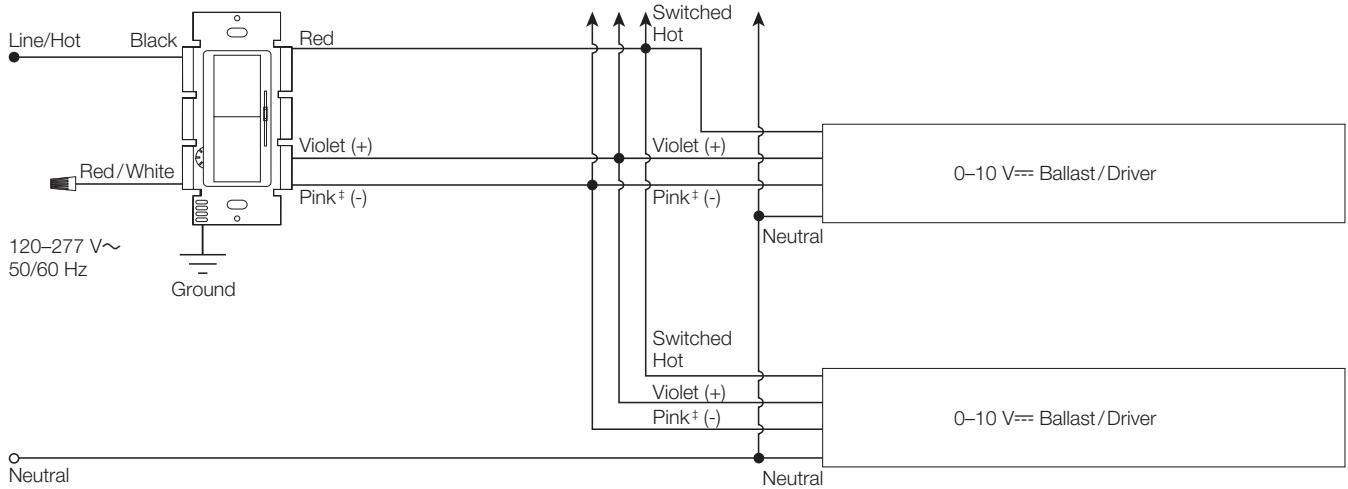

3-Way Wiring

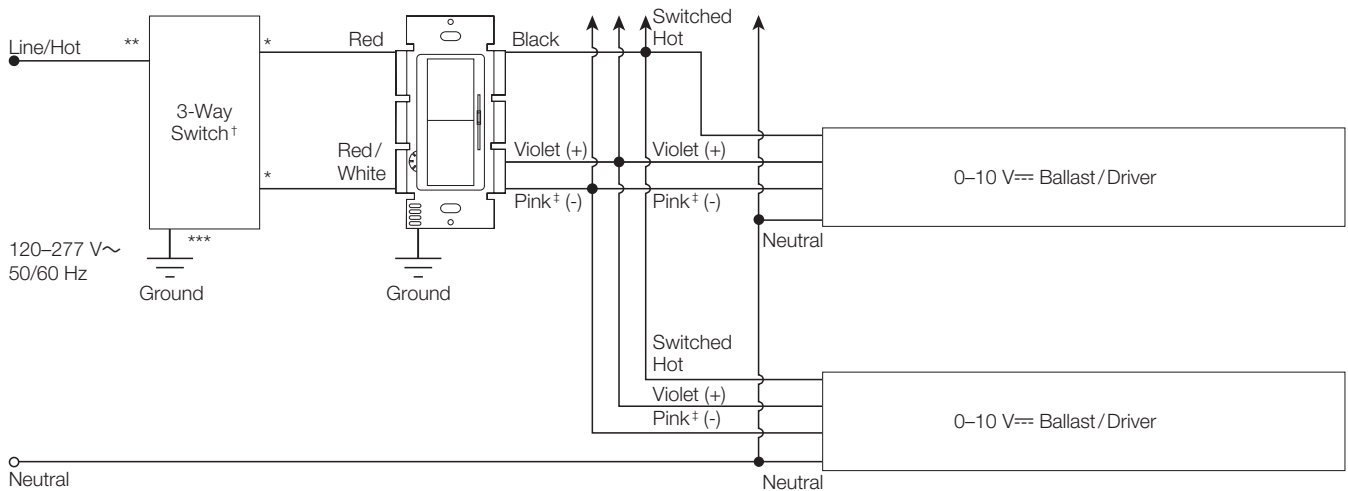

* Copper/Black screw terminal

** Brass/Gold screw terminal

*** Green screw terminal

† For proper wiring, please refer to installation instructions for 3-way switch.


‡ This wire/terminal may be gray on older products or in retrofit applications.

Job Name:	Model Numbers:
Job Number:	

Wiring Diagrams (continued)

DVSTV-/DVSCSTV- (continued)

4-Way Wiring

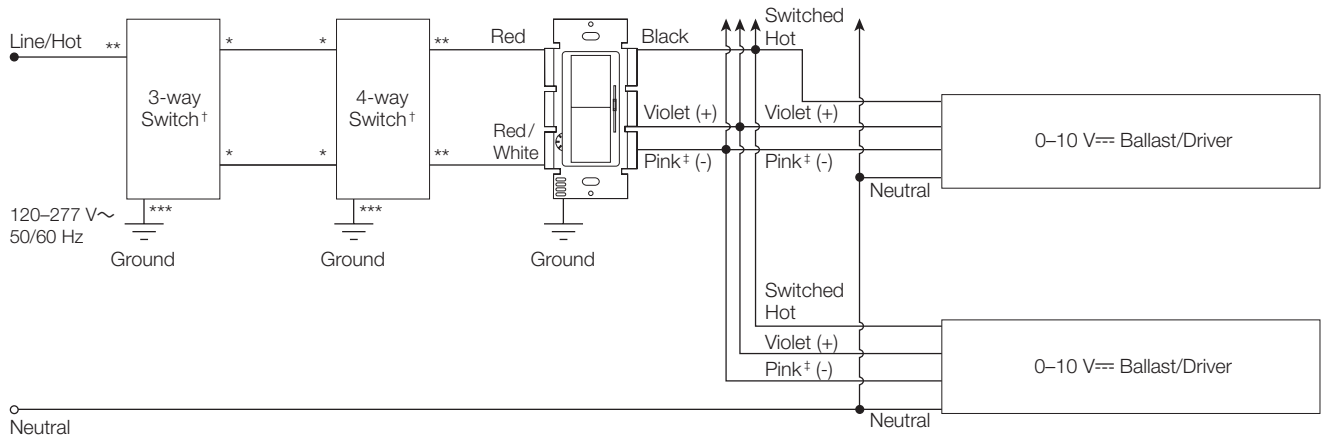

Note: For 4-way wiring, control must be installed line side or load side. It cannot be installed in the 4-way location.

- * Copper/Black screw terminal
- ** Brass/Gold screw terminal
- *** Green screw terminal
- † For proper wiring, please refer to installation instructions for 3-way/4-way switch.
- ‡ This wire/terminal may be gray on older products or in retrofit applications.

Job Name:	Model Numbers:
Job Number:	

[illegible]

Class 2 Only

The diagram shows a 3-way switch connected to a DTV Dimmer. The DTV Dimmer has terminals for Red, Blue, Violet (+), and Pink[±] (-). The Violet (+) and Pink[±] (-) terminals are connected to two 0-10 VDC Ballast/Driver units. The Ballast/Driver units have terminals for Violet (+), Pink[±] (-), Neutral, and Switched Hot. The Switched Hot terminals are connected to a 347 V~ 50/60 Hz power source. The Neutral terminals are connected to a common Neutral line. The 3-way switch is also connected to a common Neutral line. The DTV Dimmer has a Red/White terminal connected to a common Neutral line. The DTV Dimmer has a Red terminal connected to a common Neutral line. The DTV Dimmer has a Blue terminal connected to a common Neutral line. The DTV Dimmer has a Black terminal connected to a common Neutral line. The DTV Dimmer has a PP-DV/PP-347H terminal connected to a common Neutral line. The DTV Dimmer has a Red terminal connected to a common Neutral line. The DTV Dimmer has a White terminal connected to a common Neutral line. The DTV Dimmer has a Black terminal connected to a common Neutral line.


† This wire/terminal may be gray on older products or in retrofit applications.

Job Name:	Model Numbers:
Job Number:	

Wiring Diagrams (continued)


DVTV- and DVSCTV-

4-Way Wiring

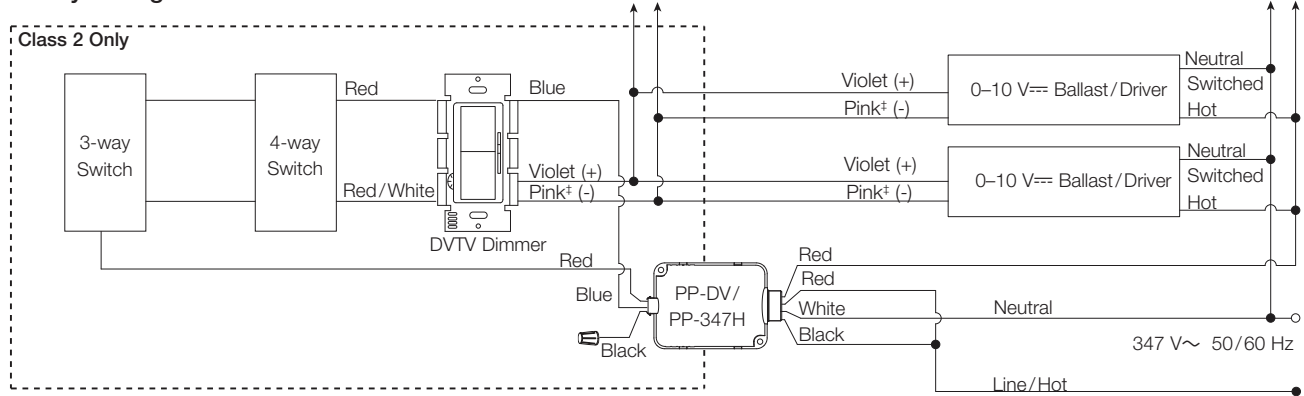

Dimming With ON/OFF Control For Drivers Which Support Dim To OFF Capability

Power Wiring Not Shown—See Lighting Device For Wiring

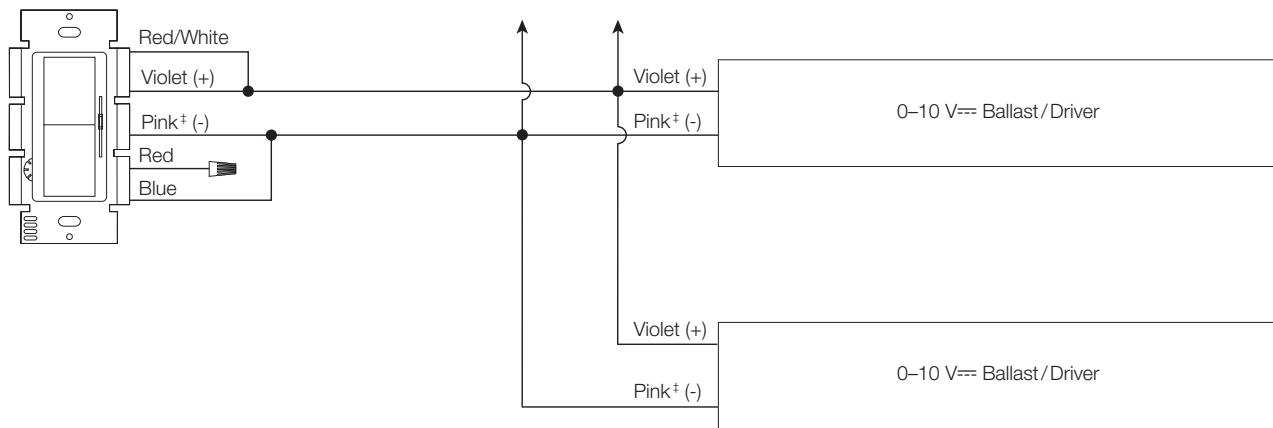

This wiring diagram is used when the fixture/ballast/driver is "dim to OFF" and complies with ANSI C137.1. With this wiring setup, the line voltage power is constantly supplied to the fixture/ballast/driver and the paddle switch on the Diva dimmer brings the 0–10 V signal to 0 V when in the off position.

[†] This wire/terminal may be gray on older products or in retrofit applications.

The Lutron logo, Lutron, Diva, Claro, and Satin Colors are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries.

All other product names, logos, and brands are property of their respective owners.

Job Name: 	Model Numbers: 	
Job Number:		