

NOXAC-5632

5"/6" AC Onyx LED Retrofit Baffle

Source: 12.5W or 15.5W

Up to 850lm or 1150lm

PRODUCT DESCRIPTION

5"/6" AC Onyx Retrofit Series requires no driver and allow for a sleek design. Spun aluminum construction provides clean sharp edges and is suitable for use with most 5" and 6" recessed housings. Deep regressed optics and round aperture deliver even and glare-free illumination.

FEATURES

- Up to 850 or 1150 delivered lumens
- 2700K, 3000K, 3500K, 4000K or 5000K @ 90+ CRI
- Dimmable AC LED
- Includes medium base socket adaptor for easy retrofitting in 5" or 6" recessed housings
- 5-year limited warranty
- ENERGY STAR certified
- Classified for wet locations

SPECIFICATION

Reflector: One piece, spun aluminum construction dissipates heat and extends life. Unitized Thermal Management, UTM, provides exceptional cool operation.

Housings: Compatible with most 5" and 6" IC and non-IC housings by Nora and others.

Mounting: Two steel, torsion mounting springs allow for easy and secure mounting in most 5" and 6" housings.

Retrofit: Luminaires include a medium base screw-socket adapter ([NRA-211SM](#)) for retrofitting into medium base downlight housings. Intended to be used as a LED lamp replacement. GU24 socket adapter ([NRA-212SM](#)) is available.

ELECTRICAL	(blank)	/HL
Input Voltage	120VAC	
Frequency	60Hz	
Input Power	12.5W	15.5W
Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K	
Dimming	Triac / ELV	
Operating Temp.	35°C max.	35°C max.

COMPATIBLE HOUSINGS

Onyx retrofits are compatible with most 5" & 6" IC and Non-IC housings by Nora and others.

Fire Box

- [NFBC-5INCATA](#) 5" ICAT Fire Box
- [NFBC-5LMRATA*](#) 5" ICAT Dedicated LED Fire Box
- [NFBC-6INCATA](#) 6" ICAT Fire Box
- [NFBC-6LMRATA*](#) 6" ICAT Dedicated LED Fire Box

New Construction

- [NHIC-5LMRAT*](#) 5" ICAT Dedicated LED
- [NHIC-5LMRAT/277*¹](#) 5" ICAT Dedicated LED, 277V
- [NHIC-527LMRAT*](#) 5" ICAT Shallow Dedicated LED
- [NHIC-501QAT](#) 5" ICAT Line Voltage
- [NHIC-527QAT](#) 5" ICAT Shallow Line Voltage
- [NH-501Q](#) 5" Line Voltage
- [NHIC-5G24ATFL](#) 5" ICAT GU24
- [NHIC-6LMRAT*](#) 6" ICAT Dedicated LED
- [NHIC-6LMRAT/277*¹](#) 6" ICAT Dedicated LED, 277V
- [NHICCP-6LMRAT*](#) 6" Chicago Plenum Dedicated LED
- [NHIC-27LMRAT*](#) 6" ICAT Shallow Dedicated LED
- [NHIC-17QAT](#) 6" ICAT Line Voltage
- [NHIC-17QNBAT](#) 6" ICAT Line Voltage (No Bracket)
- [NHIC-27QAT](#) 6" ICAT Shallow Line Voltage
- [NH-26Q](#) 6" Line Voltage
- [NHIC-6G24ATFL](#) 6" ICAT GU24

Remodel

- [NHRIC-5LMRAT*](#) 5" ICAT Dedicated LED
- [NHRIC-527LMRAT*](#) 5" ICAT Shallow Dedicated LED
- [NHRIC-504QAT](#) 5" ICAT Line Voltage
- [NHRIC-527QAT](#) 5" ICAT Shallow Line Voltage
- [NHR-504Q](#) 5" Line Voltage
- [NHRIC-6LMRAT*](#) 6" ICAT Dedicated LED
- [NHRIC-27LMRAT*](#) 6" ICAT Shallow Dedicated LED
- [NHRIC-17QAT](#) 6" ICAT Line Voltage
- [NHRIC-17QNBAT](#) 6" ICAT Line Voltage (No Bracket)
- [NHRIC-27QAT](#) 6" ICAT Shallow Line Voltage
- [NHR-26Q](#) 6" Line Voltage

* Nora LED Dedicated housings are listed for use only with Nora LED Retrofits.

¹ Housings include a step down transformer

LABELS AND LISTINGS

- 850lm luminaires are cULus classified for Wet Locations
- 1150lm luminaires are cETLus classified for Wet Locations
- ENERGY STAR certified
- 5-Year Limited Warranty
- Meets ASTM-E283 Air-Tight requirements
- FCC compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2019



Type

Project

Catalog No.

Notes

Performance Data


Part Number	(blank) Lumens	/HL Lumens	CCT
NOXAC-56327WW	817lm	1144lm	2700K
NOXAC-563130WW	850lm	1111lm	3000K
NOXAC-563135WW	824lm	1071lm	3500K
NOXAC-563140WW	869lm	1162lm	4000K
NOXAC-563150WW	862lm	1146lm	5000K

Delivered lumens will vary depending on trim type

PRODUCT IMAGES AND DIMENSIONS



NOXAC-5632 / NOX-560R-W White Oversize Ring
NOXAC-5632 / NOX-56EYELIDW White Eyelid

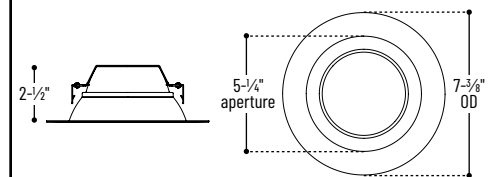

5"/6" AC Onyx LED Retrofit Baffle

Lumens / Wattage / Color Temperature / Finish

- NOXAC-563227WW** = 850lm / 15.5W / 2700K / White
- NOXAC-563227WW/HL** = 1150lm / 15.5W / 2700K / White
- NOXAC-563230WW** = 850lm / 12.5W / 3000K / White
- NOXAC-563230WW/HL** = 1150lm / 15.5W / 3000K / White
- NOXAC-563235WW** = 850lm / 12.5W / 3500K / White
- NOXAC-563235WW/HL** = 1150lm / 15.5W / 3500K / White
- NOXAC-563240WW** = 850lm / 12.5W / 4000K / White
- NOXAC-563240WW/HL** = 1150lm / 15.5W / 4000K / White
- NOXAC-563250WW** = 850lm / 12.5W / 5000K / White
- NOXAC-563250WW/HL** = 1150lm / 15.5W / 5000K / White

Optional Accessories

Description

- NOX-56EYELIDW** = 5"/6" Round White Eyelid
- NOX-560R-W** = 5"/6" Round White Oversize Ring
- NOX-56BLADE** = 5"/6" Blade for housings without spring brackets
- NRA-211SM** = Medium base screw-in socket (included w/ each)
- NRA-212SM** = Socket adapter for use with GU24 housings

Example: **NOXAC-563230WW/HL** = 5"/6" AC Onyx, Round Baffle LED Retrofit, 3000K, White Baffle / White Flange, 1150lm / 15.5W

NOXAC-5632

5"/6" AC Onyx Retrofit Baffle Accessories

Type	_____
Project	_____
Catalog No.	_____
Notes	_____



Onyx Eyelid

NOX-56EYELIDW

White

Round eyelid clips on reflector or baffle to convert into half moon wall wash



Onyx Oversize Ring

NOX-56OR-W

White

Round oversize ring covers large ceiling cut-outs up to 8-1/4"



Medium Base Screw-In Socket

NRA-211SM


Medium base screw-in socket adapter for retrofitting into existing medium base housings. One is included with each luminaire.



Socket Adapter for GU24 Housings

NRA-212SM

GU24 socket adapter for retrofitting into existing GU24 housings.



Onyx Blade Replacement

NOX-56BLADE

Pair of Two

Replaces torsion springs with mounting blades for recessed housings without spring brackets.