



MasterColor CDM-T T6

CDM150/T6/830 12PK

MasterColor CDM lamp gives a unique combination of unbeatable light quality and consistent performance over lifetime while keeping running costs low. The Philips MasterColor Tubular Single-Ended T6 lamp is a compact, energy efficient, ceramic metal halide lamp that provides crisp, sparkling light.

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Product data

General Information	
Base	G12 [G12]
Operating Position	Universal [Universal]
Life to 5% Failures (Nom)	9000 h
Life To 10% Failures (Nom)	10000 h
Life to 20% Failures (Nom)	11000 h
Life to 50% Failures (Nom)	12000 h
ANSI Code HID	C142/E
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux (Rated) (Min)	11700 lm
Luminous Flux (Rated) (Nom)	13000 lm


Color Designation	Warm White (WW)
Lumen Maintenance 10000 h (Nom)	60 %
Lumen Maintenance 2000 h (Min)	65 %
Lumen Maintenance 2000 h (Nom)	75 %
Lumen Maintenance 5000 h (Min)	60 %
Lumen Maintenance 5000 h (Nom)	70 %
Chromaticity Coordinate X (Nom)	0.436
Chromaticity Coordinate Y (Nom)	0.396
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	88 lm/W
Color Rendering Index (Nom)	88

MasterColor CDM-T T6

Operating and Electrical	
Power (Rated) (Nom)	150.1 W
Lamp Current Run-Up (Max)	2.5 A
Lamp Current (EM) (Nom)	1.8 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Ignition Peak Voltage (Min)	3500 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	106 V
Voltage (Min)	86 V
Voltage (Nom)	96 V
Controls and Dimming	
Dimmable	No
Run-Up Time 90% (Max)	3 min
Mechanical and Housing	
Bulb Finish	Clear
Approval and Application	
Energy Efficiency Label (EEL)	A+

Mercury (Hg) Content (Nom)	14.3 mg
Energy Consumption kWh/1000 h	162 kWh
UV	
Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3
Luminaire Design Requirements	
Bulb Temperature (Max)	650 °C
Cap-Base Temperature (Max)	280 °C
Pinch Temperature (Max)	350 °C
Product Data	
Order product name	CDM150/T6/830 12PK
EAN/UPC - Product	046677232726
Order code	232728
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928083705115
Net Weight (Piece)	0.033 kg
ILCOS Code	MT/UB-150/830-H-G12-21/100

Dimensional drawing





CDM-T 150W/830 G12

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
CDM150/T6/830 12PK	20 mm	0.75 in	9 mm	55 mm	57 mm	56 mm	110 mm


MasterColor CDM-T T6

Photometric data

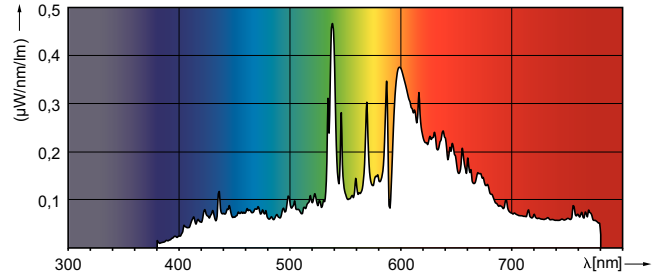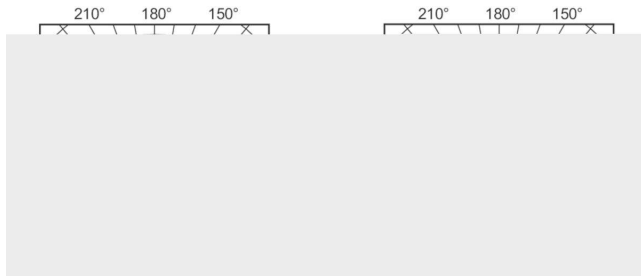

LDPO_CDM-T_150W_830-Spectral power distribution Colour

Lifetime

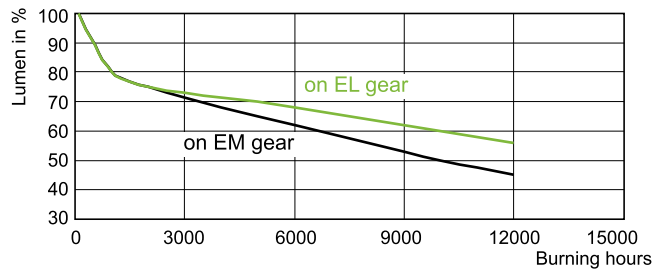

LDLM_CDM-T_150W_830-Lumen maintenance diagram

