



# PL-C Cluster 4-Pin Base

## PL-C 13W/827/4P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

### Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data


General Information			
Base	G24Q-1 [ G24q-1]	LLMF 2000 h Rated	92 %
Life to 50% Failures Preheat (Nom)	13000 h	LLMF 4000 h Rated	87 %
LSF Preheat 2000 h Rated	99 %	LLMF 6000 h Rated	83 %
LSF Preheat 4000 h Rated	98 %	LLMF 8000 h Rated	81 %
LSF Preheat 6000 h Rated	97 %		
LSF Preheat 8000 h Rated	90 %		
Light Technical		Operating and Electrical	
Color Code	827 [ CCT of 2700K]	Power (Rated) (Nom)	13.0 W
Initial lumen (Nom)	925 lm	Lamp Current (Nom)	0.170 A
Luminous Flux (Rated) (Nom)	925 lm		
Color Designation	Incandescent White		
Correlated Color Temperature (Nom)	2700 K	Temperature	
Luminous Efficacy (rated) (Nom)	69 lm/W	Design Temperature (Nom)	28 °C
Color Rendering Index (Nom)	82	Controls and Dimming	
		Dimmable	Yes

PL-C Cluster 4-Pin Base

Mechanical and Housing	
Cap-Base Information	4P
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	15 kWh
Product Data	
Order product name	PL-C 13W/827/4P/ALTO 10PK

EAN/UPC - Product	046677110727
Order code	383257
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927907182730
Net Weight (Piece)	49.900 g
ILCOS Code	FSQ-13/27/1B-E-G24q=1


Dimensional drawing




PL-C 13W/827/4P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 13W/827/4P/ALTO 10PK	27.1 mm	27.1 mm	97.5 mm	117.0 mm	131.9 mm

Photometric data

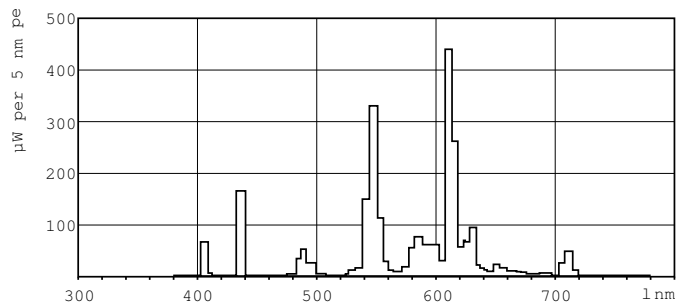


LDPB\_PLC4P\_827-Spectral power distribution B/W

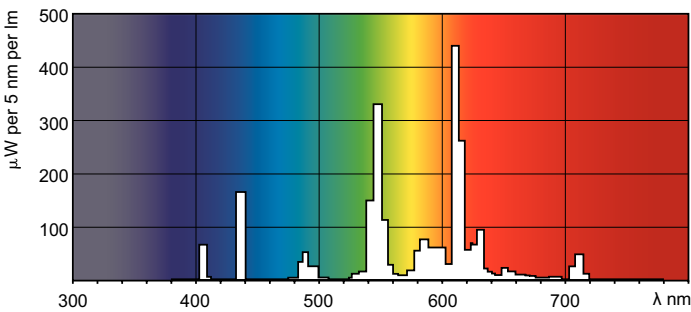


LDPO\_PLC4P\_827-Spectral power distribution Colour

PL-C Cluster 4-Pin Base


Lifetime

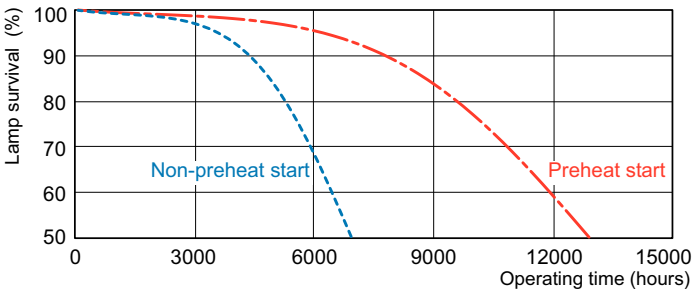

LDLE\_PLC4P\_0001-Life expectancy diagram

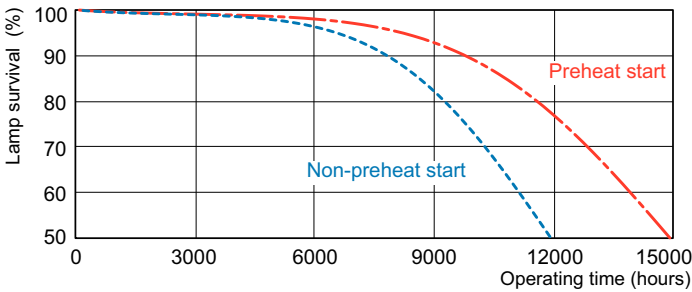

LDLE\_PLC4P\_0002-Life expectancy diagram



LDLM\_PLC4P\_0001-Lumen maintenance diagram

