



PAR38 LED Single Optic Lamps with AirFlux Technology

14PAR38/S15 3000 CW SO

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

• General Characteristics

Cap-Base	E26
Bulb	PAR38 [PAR38 mm]
Rated Avg. Life (Hours)	50000 hr

• Light Technical Characteristics

Color Code	WH
Color Designation	White
Beam Angle	15 D
Beam Description	15D [Narrow beam]
Correlated Color Temperature	3000 K
Approximate Lumens	900 Lm
Approx. MBCP	9200 cd
CRI	90
Luminous Efficacy Lamp	64.29 Lm/W
Color Temp. (Kelvin)	3000 K [CCT 3000K]
Rated Luminous Flux	900 Lm

• Electrical Characteristics

Wattage	14 W
Wattage Technical	14 W
Voltage	120 V

Line Frequency	60 Hz
Power Factor	0.9 -
Lamp Current mA	126 mA
Dimmable	No
Wattage Equivalent	95 W
Starting Time	0.5 s

• Measuring Conditions

Switching cycle	20000X
-----------------	--------

• Product Dimensions

Overall Length C	131 mm
Diameter D	120 mm

• Product Data

Product number	434950
Full product name	14PAR38/S15 3000 CW SO
Short product name	14PAR38/S15 3000 CW SO
Pieces per Sku	1
Skus/Case	6
Bar code on pack	46677434953
Bar code on case	50046677434958
Logistics code(s)	929001110304
eop_net_weight_pp	0.370 kg

- Not for use in totally enclosed luminaires.

Warnings and Safety


- Suitable for use in damp locations.



PHILIPS

PAR38 LED Single Optic Lamps with AirFlux Technology

Dimensional drawing

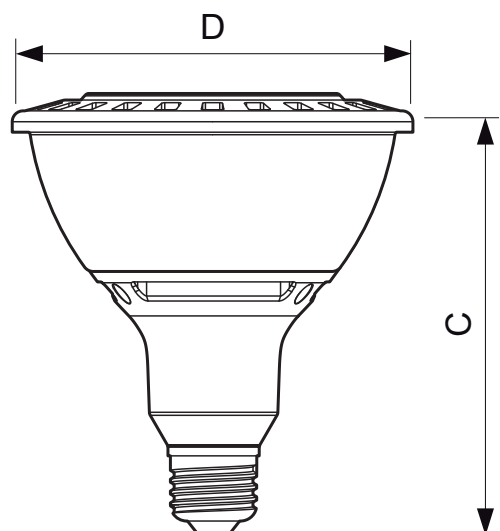

E26

14PAR38/S15 3000 CW SO

Product	C (Norm)	C1 (Max)	D (Norm)	D1 (Norm)
LED 14W 3000K PAR38 15D	131	-	120	-



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, June 28
data subject to change