PAR38 LED Single Optic Lamps with AirFlux Technology

15PAR38/F25 3000 CW SO 6/1

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

• General Information

Cap-Base	Medium [Medium]
Switching Cycle	20000X
Technical Type	14-95W

• Light Technical

Color Code	WH
Beam Angle (Nom)	25 °
Light Distribution	25D [Medium beam]
Initial lumen (Nom)	900 lm
Luminous Flux (Rated) (Nom)	900 lm
Luminous Intensity (Nom)	4200 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	64.29 lm/W
Color Rendering Index (Nom)	90

• Operating and Electrical

Input Frequency	60 Hz
Power (Rated) (Nom)	14 W
Lamp Current (Nom)	126 mA
Wattage Equivalent	95 W
Starting Time (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V

• Controls and Dimming

Dimmable	No

• Product Data

Order product name	120V PAR38 14W 25D 3000K 900 CW SO
EAN/UPC - Product	046677434960
Order code	434968
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001110404
Net Weight (Piece)	0.370 kg

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference

PHILIPS

occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005

Dimensional drawing

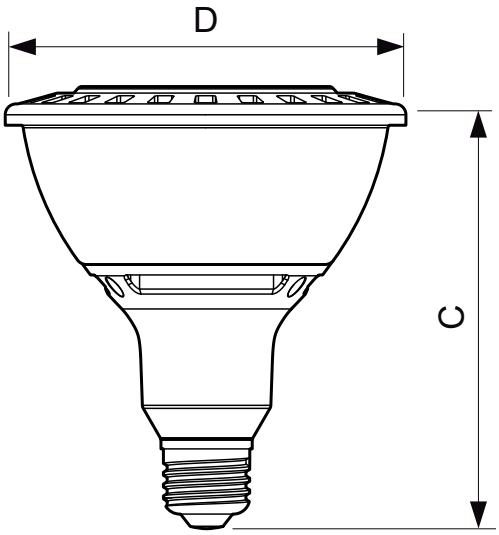

13 W, 14 W, 19 W E26 120 V PAR38

LED 14W 3000K PAR38 25D

Product	D	C
120V PAR38 14W 25D 3000K 900 CW SO	120 mm	131 mm



www.philips.com/lighting