



# PAR30/PAR20 LED

## 6PAR20/LED/830/F35/DIM SO 120V 6/1

Philips PAR30 and PAR20 LED Single Optic Lamps provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

### Product data

General Information	
Cap-Base	E26 [ Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	6-50W

Light Technical	
Color Code	830 [ CCT of 3000K]
Beam Angle (Nom)	35 °
Initial lumen (Nom)	500 lm
Luminous Flux (Rated) (Nom)	500 lm
Luminous Intensity (Nom)	1050 cd
Color Designation	Warm White (WW)
Rated Beam Angle	35 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	83.3 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	6 W
Lamp Current (Nom)	55 mA

Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	85 °C

Controls and Dimming	
Dimmable	Yes

Approval and Application	
Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	Not applicable

Product Data	
Order product name	120V PAR20 SO 6W 35D 3000K DIM
EAN/UPC - Product	046677463687
Order code	463687
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001225404
Net Weight (Piece)	0.001 kg

# PAR30/PAR20 LED

## Warnings and Safety



- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.
- CAUTION: Risk of electric shock— do not use where directly exposed to water
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005.

## Dimensional drawing

Product	D	C
120V PAR20 SO 6W 35D 3000K DIM	63.2 mm	82.6 mm

PAR20 120V 6W-50W 500lm 35D 3000K E26 D

## Photometric data

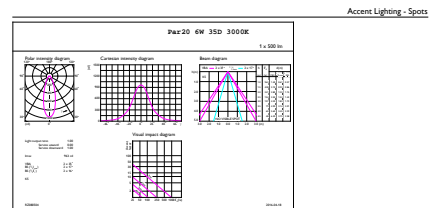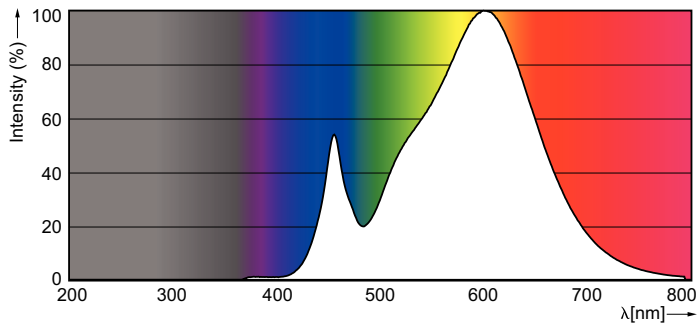

© 2017 Philips Lighting B.V. Philips Lighting B.V. Page 1/1

