



PAR38 LED

13.5PAR38/AMB/F25/827/DIM ULW

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

General Information		Lamp Current (Nom)	
Cap-Base	E26 [Single Contact Medium Screw]		119 mA
Nominal Lifetime (Nom)	25000 h	Wattage Equivalent	90 W
Switching Cycle	50000X	Starting Time (Nom)	0.5 s
Technical Type	13.5-90W	Warm Up Time To 60% Light (Nom)	0.5 s
		Power Factor (Nom)	0.9
		Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	827 [CCT of 2700K]		
Beam Angle (Nom)	25 °	T-Case Maximum (Nom)	65 °C
Initial lumen (Nom)	950 lm		
Luminous Flux (Rated) (Nom)	950 lm	Controls and Dimming	
Luminous Intensity (Nom)	4100 cd	Dimmable	Yes
Color Designation	Warm White (WW)		
Rated Beam Angle	25 °	Approval and Application	
Correlated Color Temperature (Nom)	2700 K	Energy Saving Product	Yes
Luminous Efficacy (rated) (Nom)	70.37 lm/W	Suitable For Accent Lighting	Yes
Color Consistency	<6	Approbation Marks	Energy Star
Color Rendering Index (Nom)	80		
LLMF At End Of Nominal Lifetime (Nom)	70 %	Product Data	
		Order product name	13.5PAR38/AMB/F25/827/DIM ULW
		EAN/UPC - Product	046677467753
		Order code	467753
		Numerator - Quantity Per Pack	1
Operating and Electrical			
Input Frequency	50 to 60 Hz		
Power (Rated) (Nom)	13.5 W		


PAR38 LED

Numerator - Packs per outer box	6
Material Nr. (12NC)	929001292004
Net Weight (Piece)	0.385 kg

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005



Dimensional drawing



13.5PAR38/AMB/F25/827/DIM ULW

Product	D	C
13.5PAR38/AMB/F25/827/DIM ULW	125 mm	135 mm

Photometric data

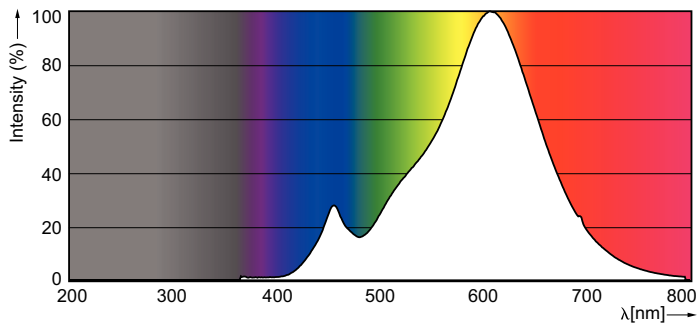

Standard Reference 01 Philips Lighting 01 Page 07

