



MasterClass LEDtube InstantFit T8

7T8 LED/24-3000 IF 10/1

The MasterClass InstantFit TLED is a great LED solution suitable for replacing T8 fluorescent lamps, using the existing ballast. MasterClass TLEDs feature a shatter-resistant polycarbonate construction, 70,000 hour life and a standard 7-year limited warranty. When maximum energy savings and long life are needed, Philips MasterClass TLED are the solution.

Product data


General Information	
Base	G13 [Medium Bi-Pin Fluorescent]
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
B50L70	50000 h
Light Technical	
Color Code	830 [CCT of 3000K]
Initial lumen (Nom)	1050 lm
Luminous Flux (Rated) (Nom)	1050 lm
Correlated Color Temperature (Nom)	3000 K
Color Consistency	<6
Color Rendering Index (Nom)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	20000-120000 Hz
Power (Rated) (Nom)	7 W
Lamp Current (Max)	240 mA
Lamp Current (Min)	80 mA

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.1 s
Power Factor (Nom)	0.9
Voltage (Nom)	120-277, 347 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	50 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Product Length	600 mm
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable


MasterClass LEDtube InstantFit T8

Energy Saving Product	Yes
Approbation Marks	UL certificate RoHS compliance
Product Data	
Order product name	7T8 LED/24-3000 IF 10/1
EAN/UPC - Product	046677472276
Order code	469270

Dimensional drawing


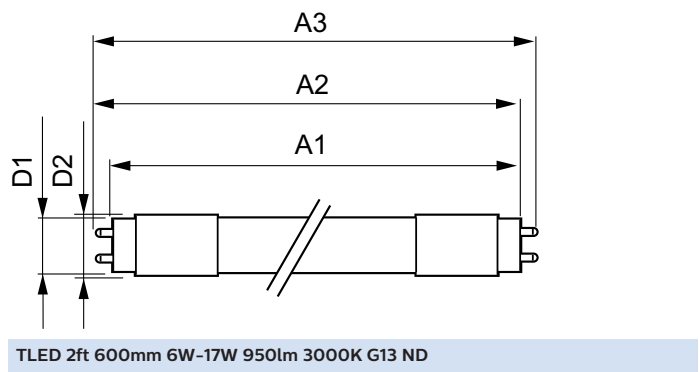


Photometric data

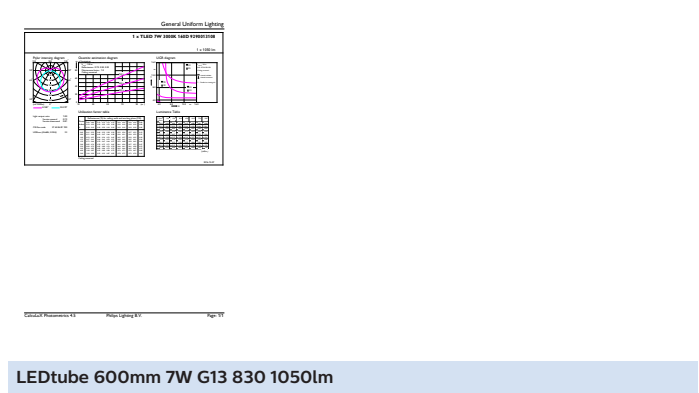

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001310804
Net Weight (Piece)	0.090 kg
Model Number	9290013108

Product	D1	D2	A1	A2	A3
7T8 LED/24-3000 IF 10/1	25.7 mm	26.3 mm	588.6 mm	595.7 mm	602.8 mm

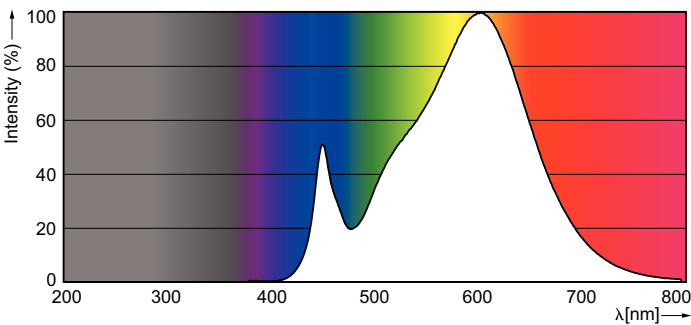

STD 600 mm 10 W /830 T8 I

Lifetime

