



MasterClass LEDtube InstantFit T8

9T8 LED/36-3500 IF 10/1

The Masterclass LED Type A - Ballast Driven (Plug and Play) InstantFit TLED is a great LED solution suitable for replacing T8 fluorescent lamps, using an existing ballast. Specific lamps can also be used on Philips Xitanium driver for Type C applications.

Product data


General Information		Starting Time (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Warm Up Time to 60% Light (Nom)	0.5 s
Nominal Lifetime (Nom)	50000 h	Power Factor (Nom)	0.1 s
Switching Cycle	50000X	Voltage (Nom)	0.9
B50L70	50000 h		120-277, 347 V
Light Technical		Temperature	
Color Code	835 [CCT of 3500K]	T-Ambient (Max)	45 °C
Luminous Flux (Nom)	1100 lm	T-Ambient (Min)	-20 °C
Luminous Flux (Rated) (Nom)	1100 lm	T-Storage (Max)	65 °C
Correlated Color Temperature (Nom)	3500 K	T-Storage (Min)	-40 °C
Color Consistency	<6	T-Case Maximum (Nom)	50 °C
Color Rendering Index (Nom)	82	Controls and Dimming	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Dimmable	No
Operating and Electrical		Mechanical and Housing	
Input Frequency	20000-120000 Hz	Product Length	900 mm
Power (Rated) (Nom)	9 W	Approval and Application	
Lamp Current (Max)	180 mA	Energy Efficiency Label (EEL)	Not applicable
Lamp Current (Min)	60 mA		

MasterClass LEDtube InstantFit T8

Energy Saving Product	Yes
Approval Marks	UL certificate RoHS compliance
Product Data	
Order product name	9T8 LED/36-3500 IF 10/1
EAN/UPC - Product	046677472320
Order code	469338

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001311404
Net Weight (Piece)	0.170 kg



Dimensional drawing

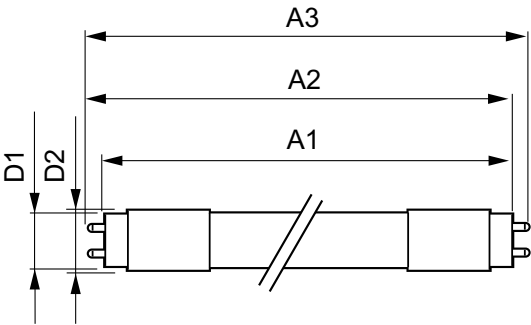


TLED 3ft 900mm 10.5-25W 1100lm 3500K ND

Product	D1	D2	A1	A2	A3
9T8 LED/36-3500 IF 10/1	25.7 mm	26.3 mm	893.4 mm	900.5 mm	907.6 mm

Photometric data



LEDtube 900mm 9W G13 835 1100lm

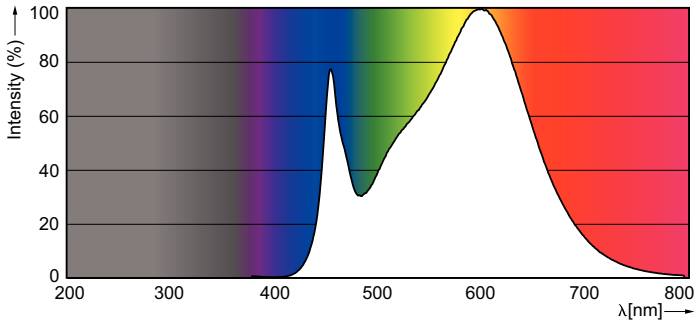

LED InstantFit PL-C/T 100mm 8.5 W /835

MasterClass LEDtube InstantFit T8

Lifetime

