



# LED InstantFit Lamps

## 10T8/48-3000 IF 10/1 TAA/NAFTA

Philips LED T8 InstantFit Lamps are an ideal energy saving choice for existing linear fluorescent fixtures.

### Product data

<b>General Information</b>		<b>Voltage (Nom)</b>		120-277, 347 V
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]	<b>Temperature</b>		
Main Application	Industrial	T-Ambient (Max)	45 °C	
Nominal Lifetime (Nom)	50000 h	T-Ambient (Min)	-20 °C	
Switching Cycle	50000X	T-Storage (Max)	65 °C	
B50L70	50000 h	T-Storage (Min)	-40 °C	
<b>Light Technical</b>		T-Case Maximum (Nom)	40 °C	
Color Code	830 [ CCT of 3000K]	<b>Controls and Dimming</b>		
Initial lumen (Nom)	1500 lm	Dimmable	No	
Luminous Flux (Rated) (Nom)	1500 lm	<b>Mechanical and Housing</b>		
Correlated Color Temperature (Nom)	3000 K	Product Length	1200 mm	
Color Consistency	<6	<b>Approval and Application</b>		
Color Rendering Index (Nom)	82	Energy Saving Product	Yes	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Energy Efficiency Label (EEL)	Not applicable	
<b>Operating and Electrical</b>		Approbation Marks	UL certificate RoHS compliance	
Input Frequency	50 to 60 Hz	<b>Product Data</b>		
Power (Rated) (Nom)	10 W	Order product name	10T8/48-3000 IF 10/1 TAA/NAFTA	
Lamp Current (Nom)	140 mA	EAN/UPC - Product	046677472603	
Starting Time (Nom)	0.5 s	Order code	469569	
Warm Up Time to 60% Light (Nom)	0.5 s			
Power Factor (Nom)	0.9			

LED InstantFit Lamps


Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001123984

Net Weight (Piece)	0.001 kg
--------------------	----------

Warnings and Safety




- Perform a visual inspection to ensure lamp holders (or sockets) are not damaged or loose. If the lamp holders (or sockets) are damaged, corroded, charred, blackened or loose, contact a qualified electrician for proper replacement.
- Please refer to the ballast compatibility guide located at [www.philips.com/instantfit](http://www.philips.com/instantfit).

Dimensional drawing

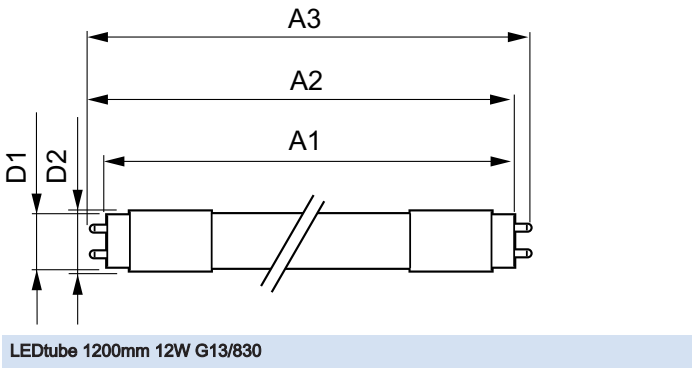

Product	D1	D2	A1	A2	A3
10T8/48-3000 IF 10/1 TAA/	25.68 mm	28 mm	1198.0 mm	1205.0 mm	1212.0 mm
NAFTA					

Photometric data

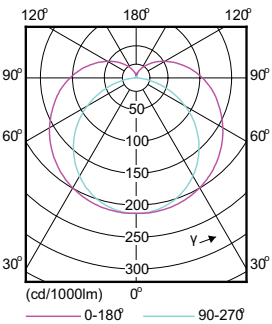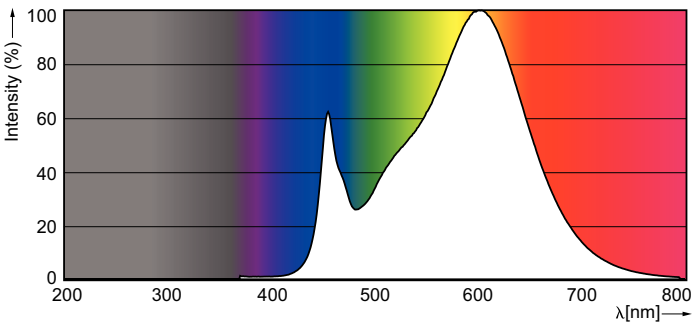

LED InstantFit Lamps

Lifetime

