



# PAR38 LED

## 17PAR38/EC RETAIL/F25/930/DIM 6/1

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

### Product data

General Information		Lamp Current (Nom)	
Cap-Base	E26 [ Single Contact Medium Screw]		170 mA
Nominal Lifetime (Nom)	25000 h	Wattage Equivalent	120 W
Switching Cycle	50000X	Starting Time (Nom)	0.5 s
Technical Type	17-120W	Warm Up Time to 60% Light (Nom)	0.5 s
		Power Factor (Nom)	0.9
		Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	930 [ CCT of 3000K]		
Beam Angle (Nom)	25 °	T-Case Maximum (Nom)	90 °C
Initial lumen (Nom)	1200 lm		
Luminous Flux (Rated) (Nom)	1200 lm	Controls and Dimming	
Luminous Intensity (Nom)	6000 cd	Dimmable	Yes
Color Designation	White (WH)		
Rated Beam Angle	25 °	Approval and Application	
Correlated Color Temperature (Nom)	3000 K	Suitable For Accent Lighting	Yes
Luminous Efficacy (Rated) (Nom)	70 lm/W		
Color Consistency	<6	Product Data	
Color Rendering Index (Nom)	90	Order product name	17PAR38/EXPERTCOLOR RETAIL/F25/930/DIM B
LLMF At End Of Nominal Lifetime (Nom)	70 %	EAN/UPC - Product	046677471026
		Order code	471029
		Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	6
		Material Nr. (12NC)	929001285504
Operating and Electrical			
Input Frequency	60 Hz		
Power (Rated) (Nom)	17 W		


# PAR38 LED

Net Weight (Piece)	0.425 kg
--------------------	----------

## Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005


## Dimensional drawing




PAR38 120V 17-120W 25D 3000K E26 D BL

Product	D	C
17PAR38/EXPERTCOLOR RETAIL/F25/930/DIM B	120.7 mm	134.6 mm

## Photometric data

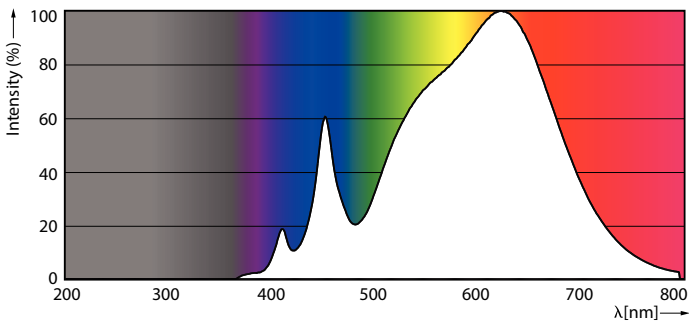


PAR38 120V 17-90W 1200lm 8D 3000K E26 D

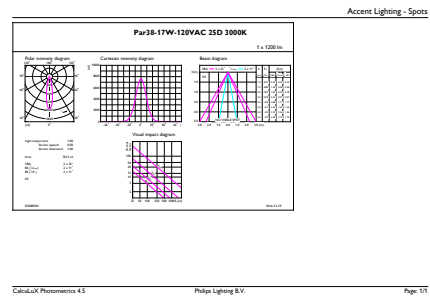


# PAR38 LED

## Photometric data

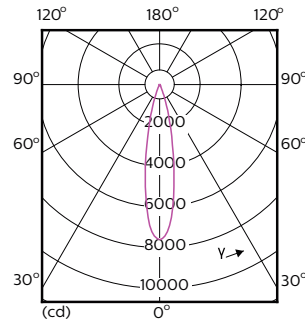


PAR38 120V 17-120W 25D 3000K E26 D BL

## Lifetime

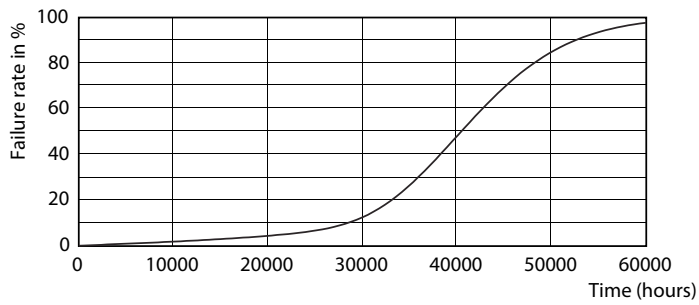

ExpertColor PAR38 30S 30L Dim 120V Life Expectancy Diagram

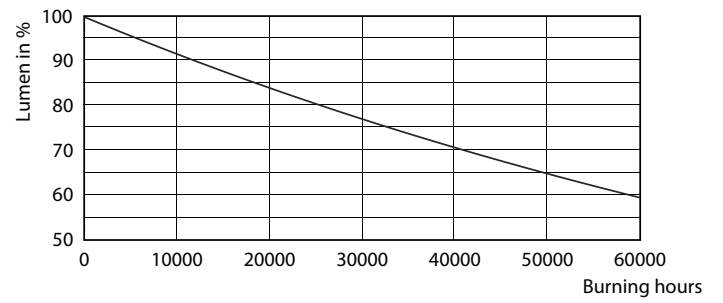

ExpertColor PAR38 30S 30L Dim 120V Lumen Maintenance Diagram

