



MasterConnect LEDtube InstantFit T8

8T8 LED/24-4000 IF EasySmart 1PK 10/1

Philips MasterConnect LEDtube InstantFit T8 lamp, which is Interact Ready, enables an easy upgrade to a connected lighting system without re-wiring the fixtures. The 2.4GHz mesh networking technology allows integration with a variety of control device, such as sensor and switch. It also offers secure and reliable communication towards the Interact IoT platform or verified third party systems. The result? Greater energy savings, various control possibilities and a more adaptable space!

Product data


General Information		Operating and Electrical	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Input Frequency	40000-85000 Hz
Main Application	Industrial	Power (Rated) (Nom)	8 W
Nominal Lifetime (Nom)	50000 h	Lamp Current (Max)	280 mA
Switching Cycle	50000X	Lamp Current (Min)	70 mA
B50L70	50000 h	Starting Time (Nom)	0.5 s
Light Technical		Warm Up Time to 60% Light (Nom)	0.5 s
Color Code	841 [CCT of 4100K (841)]	Power Factor (Nom)	0.9
Beam Angle (Nom)	160 °	Voltage (Nom)	200-380 V
Initial lumen (Nom)	1200 lm	Temperature	
Luminous Flux (Rated) (Nom)	1200 lm	T-Ambient (Max)	45 °C
Rated Beam Angle	160 °	T-Ambient (Min)	-20 °C
Correlated Color Temperature (Nom)	4000 K	T-Storage (Max)	65 °C
Color Consistency	<6	T-Storage (Min)	-40 °C
Color Rendering Index (Nom)	80	T-Case Maximum (Nom)	35 °C
LLMF At End Of Nominal Lifetime (Nom)	70 %		

MasterConnect LEDtube InstantFit T8

Controls and Dimming	
Dimmable	Wireless Dim
Mechanical and Housing	
Product Length	600 mm
Approval and Application	
Energy Saving Product	Yes
Approbation Marks	UL certificate RoHS compliance DLC compliance
DesignLights Consortium Qualified Product List	DesignLights Consortium Qualified Product List

Product Data	
Order product name	8T8 LED/24-4000 IF EasySmart 1PK
EAN/UPC - Product	046677474072
Order code	474072
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001398604
Net Weight (Piece)	0.090 kg
Model Number	9290013986


Dimensional drawing

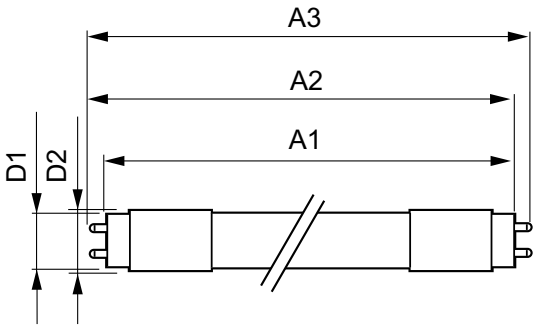


TLED SMART 2ft HF 8-18W 1050lm 4000K

Product	D1	D2	A1	A2	A3
8T8 LED/24-4000 IF EasySmart 1PK	25.6 mm	27.8 mm	588.6 mm	595.7 mm	602.8 mm

Photometric data

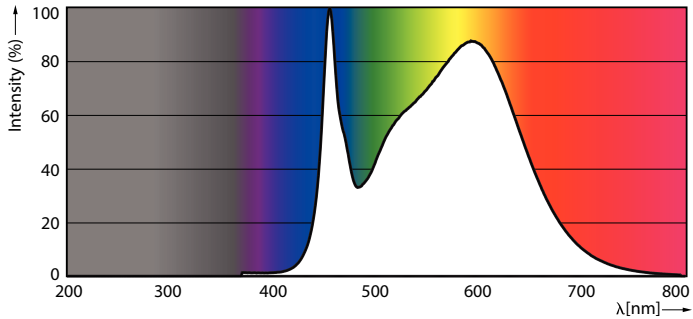


LEDtube 1500mm 20W G5 840 3000lm



LEDtube 8W G13 830 160D IF EasySmart

MasterConnect LEDtube InstantFit T8



Photometric data




General Illuminance 1.1 Beam Lighting 1.1 Page 11

LEDtube 8W G13 840 160D IF EasySmart


Lifetime

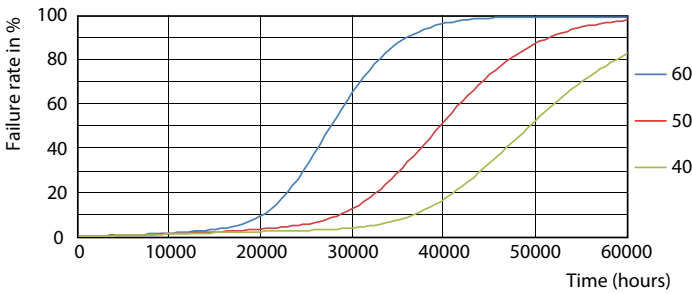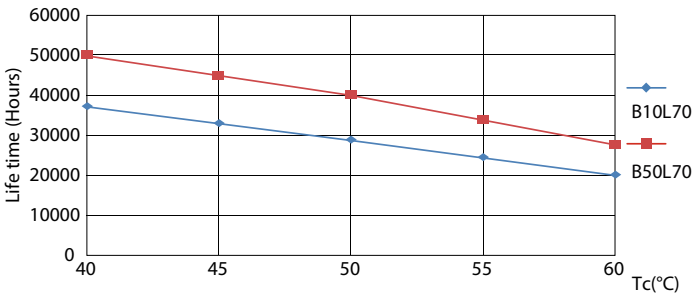

LEDtube 15W G13 830-850 160D IF 6U EasySmart

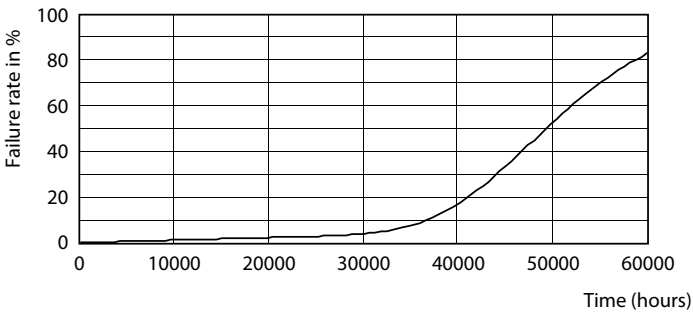

LEDtube 15W G13 830-850 160D IF 6U EasySmart

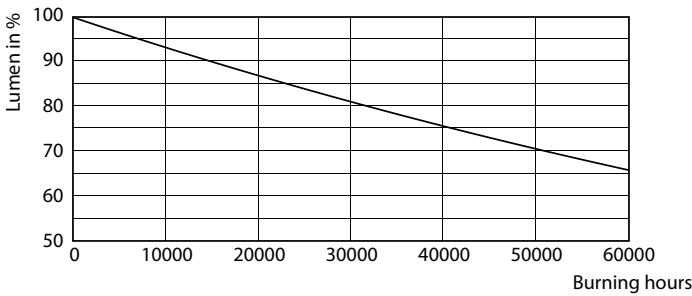


LEDtube 15W G13 830-850 160D IF 6U EasySmart

LEDtube 15W G13 830-850 160D IF 6U EasySmart

MasterConnect LEDtube InstantFit T8

Lifetime

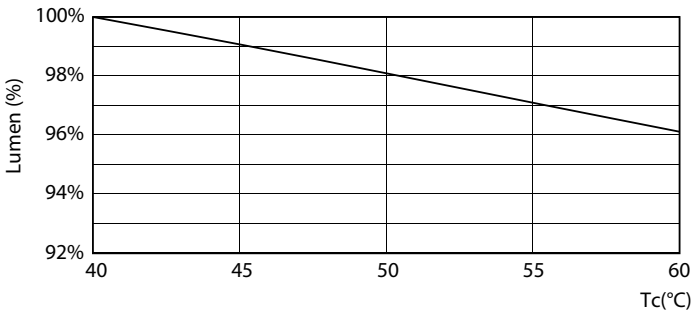

LEDtube 15W G13 830-850 160D IF 6U EasySmart

