

T8

12.5T8/COR/48-850/MF18/G 10/1

Philips MainsFit (UL Type B) CorePro T8 LED tubes deliver high-quality, flicker free performance at an affordable price. The UL Type B LED tubes are designed with easy installation and long-term maintenance simplicity in mind. Upgrade your lighting to Philips and realize 50,000 hour LED lifetime backed by a 5-year, full replacement limited warranty.

Product data

General Information		Lamp Current (Min)	
Base	G13 [Medium Bi-Pin Fluorescent]		45 mA
EU RoHS compliant	Yes	Starting Time (Nom)	0.5 s
Nominal Lifetime (Nom)	50000 h	Warm Up Time to 60% Light (Nom)	0.5 s
Switching Cycle	50000X	UL Type	Type B - bypass the ballast
Technical Type	12.5-25-28-30-32W	Power Factor (Nom)	0.9
		Voltage (Nom)	120-277 V
Light Technical		Temperature	
Color Code	850 [CCT of 5000K]	T-Ambient (Max)	45 °C
Beam Angle (Nom)	240 °	T-Ambient (Min)	-20 °C
Initial lumen (Nom)	1800 lm	T-Storage (Max)	65 °C
Color Designation	Daylight	T-Storage (Min)	-40 °C
Correlated Color Temperature (Nom)	5000 K	T-Case Maximum (Nom)	60 °C
Luminous Efficacy (rated) (Nom)	144.00 lm/W		
Color Consistency	<5	Controls and Dimming	
Color Rendering Index (Nom)	82	Dimmable	No
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and Electrical		Mechanical and Housing	
Input Frequency	50 to 60 Hz	Bulb Finish	Frosted
Power (Rated) (Nom)	12.5 W	Bulb Material	Glass
Lamp Current (Max)	105 mA	Product Length	48 in

T8

Approval and Application


Energy Efficiency Label (EEL)	Not applicable
Energy Saving Product	Yes
Approbation Marks	RoHS compliance UL certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh

Product Data

Order product name	12.5T8/COR/48-850/MF18/G 10/1
--------------------	-------------------------------

EAN/UPC - Product	046677477349
Order code	477349
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002394704
Net Weight (Piece)	0.220 kg
Model Number	9290023947

Dimensional drawing

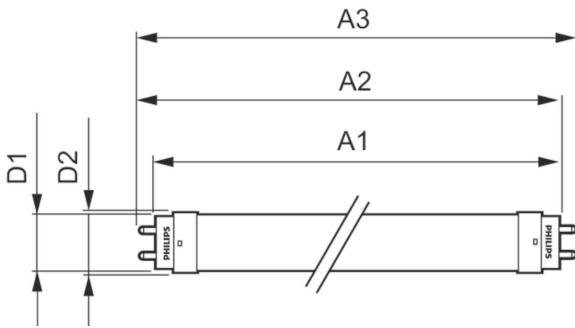


TLED T8 120-277V 12.5-32W 1800lm 5000K

Product


12.5T8/COR/48-850/MF18/G 10/1

Photometric data




General Uniform Lighting
1 x TLED 12.5W G13 1800lm 850
Page 11

LEDtube 12,5W G13 1800lm 850

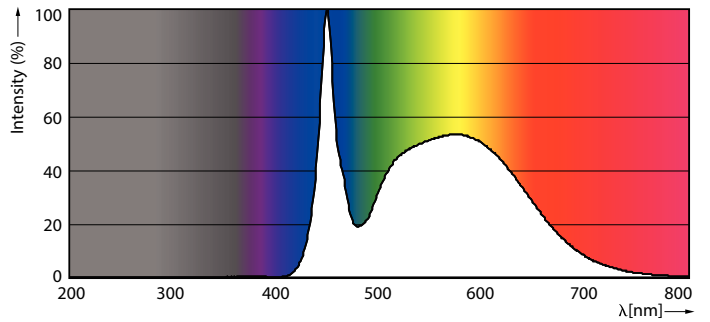


LEDtube G13 850 COR

Photometric data

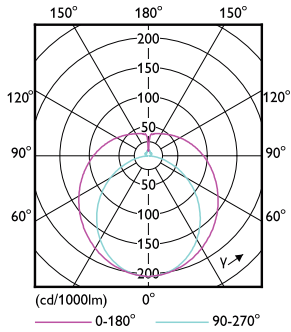


LEDtube G13 COR


Lifetime

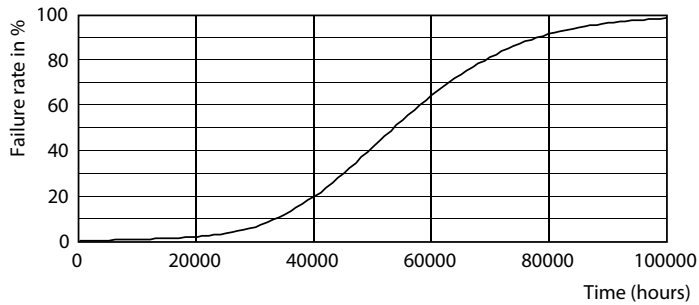


LEDtube 50K-LED

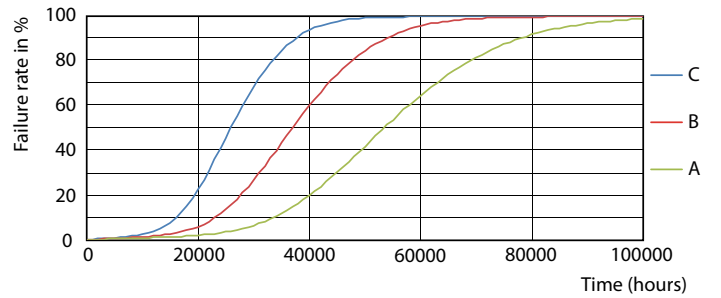

LEDtube 50K FailureRate-LED

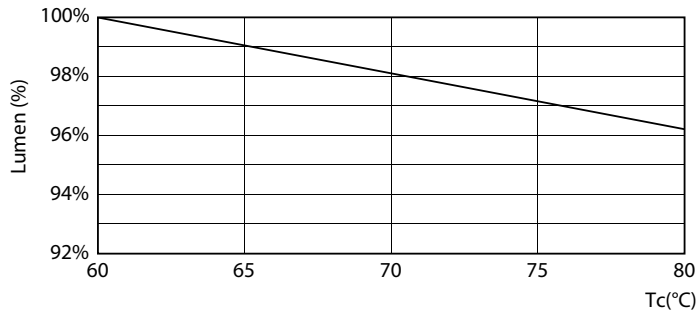


LEDtube 12,5W 50K LumenVsTc

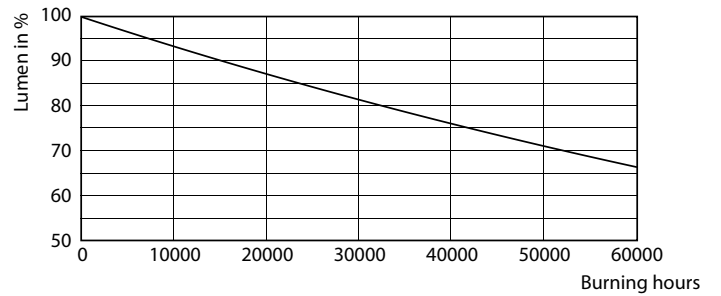

LEDtube 50K-LMP

Lifetime

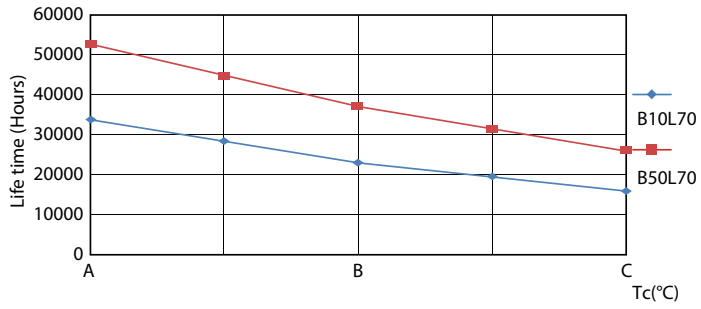

LEDtube 50K LifetimeVsTc-LED

