



TrueForce LED Industrial and Retail (Highbay – MH)

100HB/LED/750/ND NB DL BB 2/1


Product data

General Information		Lamp Current (Nom)	
Cap-Base	EX39 [Exclusionary Mogul Screw]		850 mA
RoHS mark	RoHS mark	Wattage Equivalent	250 W
Nominal Lifetime (Nom)	50000 h	Starting Time (Nom)	0.5 s
Switching Cycle	50000X	Warm Up Time to 60% Light (Nom)	0.5 s
Technical Type	100-250W	Power Factor (Nom)	0.9
		Voltage (Nom)	120-277 V
Light Technical		Temperature	
Color Code	750 [CCT of 5000K]	T-Case Maximum (Nom)	70 °C
Beam Angle (Nom)	70 °		
Initial lumen (Nom)	12000 lm	Controls and Dimming	
Luminous Flux (Rated) (Nom)	12000 lm	Dimmable	No
Color Designation	Daylight		
Correlated Color Temperature (Nom)	5000 K	Approval and Application	
Luminous Efficacy (rated) (Nom)	120.00 lm/W	DesignLights Consortium Qualified Product List	DesignLights Consortium Qualified Product List
Color Consistency	<6		
Color Rendering Index (Nom)	70	Product Data	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Order product name	100HB/LED/750/ND NB DL BB 2/1
		EAN/UPC - Product	046677478032
		Order code	478032
		Numerator - Quantity Per Pack	1
Operating and Electrical			
Input Frequency	50 to 60 Hz		
Power (Rated) (Nom)	100 W		

TrueForce LED Industrial and Retail (Highbay – MH)

Numerator - Packs per outer box	2
Material Nr. (12NC)	929001851704
Net Weight (Piece)	0.885 kg



Dimensional drawing



High Bay Mains 250W 5000K Down Light NB

Product	D	C
100HB/LED/750/ND NB DL BB 2/1	211 mm	252 mm


Photometric data

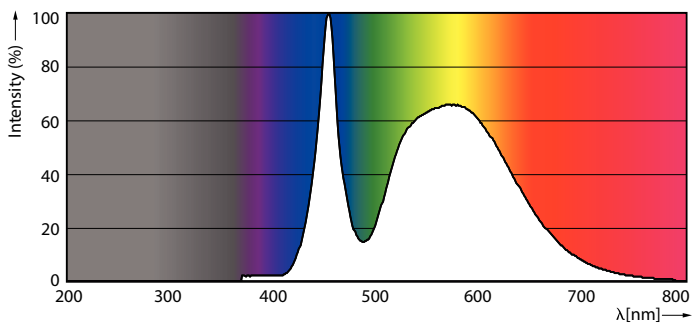

General Uniform Lighting

TrueForce LED Industrial and Retail 750



TrueForce LED Industrial and Retail 100HB 750 NB



TrueForce LED Industrial and Retail NB

TrueForce LED Industrial and Retail (Highbay – MH)

Lifetime

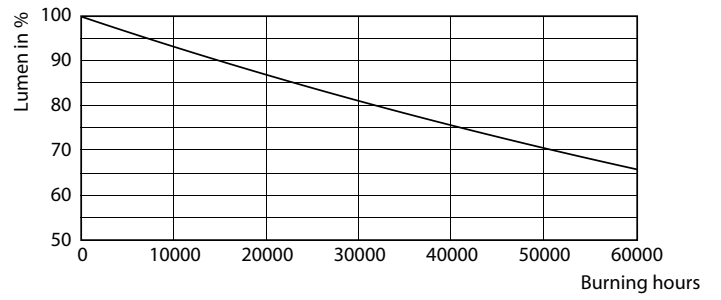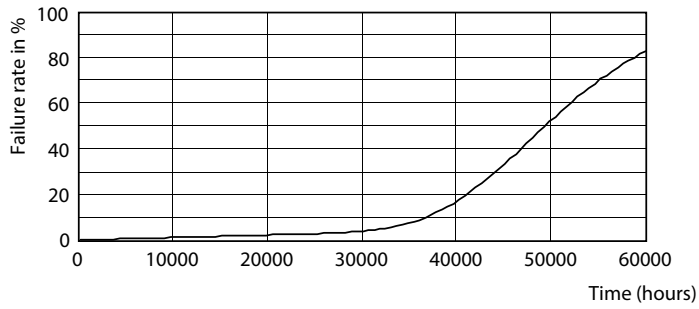

LED TForce HB MV 120-100W E40 others 840 12D ND NB

LED TForce HB MV 120-100W E40 others 840 12D ND NB

