



LED PAR30 S/L

10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.


Product data

General Information		Starting Time (Nom)	
Base	E26 [Single Contact Medium Screw]		0.5 s
EU RoHS compliant	Yes	Warm Up Time to 60% Light (Nom)	0.5 s
Nominal Lifetime (Nom)	25000 h	Power Factor (Nom)	0.9
Switching Cycle	25000X	Voltage (Nom)	120 V
Technical Type	10-75W		
Light Technical		Temperature	
Color Code	827 [CCT of 2700K]	T-Case Maximum (Nom)	70 °C
Beam Angle (Nom)	40 °		
Initial lumen (Nom)	800 lm	Controls and Dimming	
Luminous Intensity (Nom)	1600 cd	Dimmable	Yes
Color Designation	Warm White (WW)		
Correlated Color Temperature (Nom)	2700 K	Approval and Application	
Luminous Efficacy (rated) (Nom)	80.00 lm/W	Energy Efficiency Label (EEL)	Not applicable
Color Consistency	<6	Suitable For Accent Lighting	Yes
Color Rendering Index (Nom)	80	Energy Consumption kWh/1000 h	- kWh
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and Electrical		Product Data	
Input Frequency	50 to 60 Hz	Order product name	10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB
Power (Rated) (Nom)	10 W	EAN/UPC - Product	046677529796
Lamp Current (Nom)	86 mA	Order code	529792
Wattage Equivalent	75 W	Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	6
		Material Nr. (12NC)	929001320904

LED PAR30 S/L

Net Weight (Piece) 0.220 kg



Dimensional drawing



Classic PAR30S 120V 9-75W 800lm 40D 2700


Product	D	C
10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB	94 mm	93 mm

Photometric data

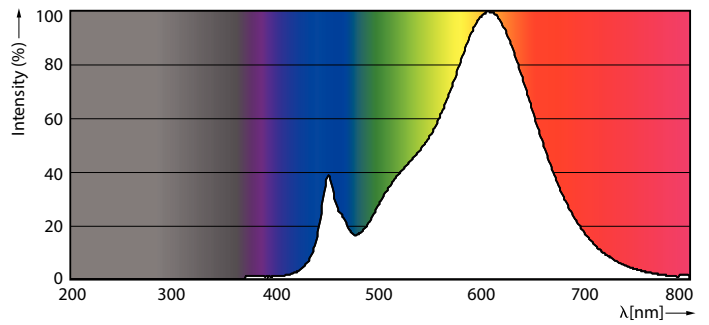

10-75W E26 PAR30S 40D 827 2700K



10-75W E26 PAR30S



10-75W E26 PAR30S 40D 827 2700K

LED PAR30 S/L

Lifetime

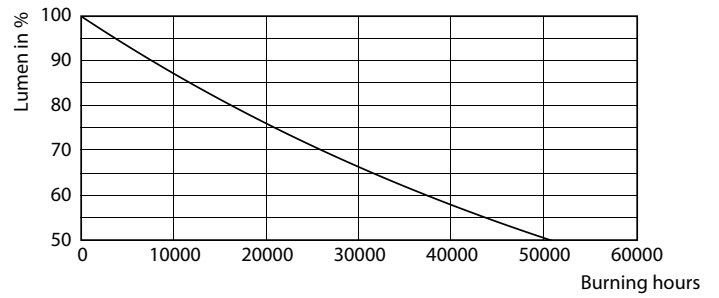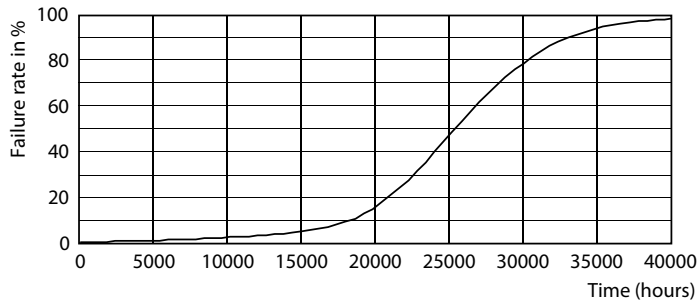

14-120W E26 PAR38

14-120W E26 PAR38

