



LED InstantFit Lamps

5.5PL-C/LED/13H/827/IF5/P/4P 20/1

Philips LED T8 InstantFit Lamps are an ideal energy saving choice for existing linear fluorescent fixtures.

Product data

General Information		Voltage (Nom)	
Cap-Base	G24Q [G24q]	14-60 V	
Nominal Lifetime (Nom)	50000 h	Temperature	
Switching Cycle	50000X	T-Ambient (Max)	45 °C
B50L70	50000 h	T-Ambient (Min)	-20 °C
Light Technical		T-Storage (Max)	65 °C
Color Code	827 [CCT of 2700K]	T-Storage (Min)	-40 °C
Beam Angle (Nom)	150 °	T-Case Maximum (Nom)	75 °C
Initial lumen (Nom)	520 lm	Controls and Dimming	
Luminous Flux (Rated) (Nom)	520 lm	Dimmable	No
Rated Beam Angle	150 °	Mechanical and Housing	
Correlated Color Temperature (Nom)	2700 K	Height	27 mm
Color Consistency	<6	Approval and Application	
Color Rendering Index (Nom)	82	Energy Saving Product	Yes
LLMF At End Of Nominal Lifetime (Nom)	70 %	Approbation Marks	UL certificate RoHS compliance
Operating and Electrical		Product Data	
Input Frequency	25000-100000 Hz	Order product name	5.5PL-C/LED/13H/827/IF5/P/4P 20/1
Power (Rated) (Nom)	5.5 W	EAN/UPC - Product	046677532390
Lamp Current (Max)	280 mA	Order code	532390
Lamp Current (Min)	130 mA	Numerator - Quantity Per Pack	1
Starting Time (Nom)	0.5 s	Numerator - Packs per outer box	20
Warm Up Time to 60% Light (Nom)	0.5 s		
Power Factor (Nom)	0.9		


LED InstantFit Lamps

Material Nr. (12NC)	929001885304
Net Weight (Piece)	0.060 kg
Model Number	9290018853

Warnings and Safety

- Perform a visual inspection to ensure lamp holders (or sockets) are not damaged or loose. If the lamp holders (or sockets) are damaged, corroded, charred, blackened or loose, contact a qualified electrician for proper replacement.
- Please refer to the ballast compatibility guide located at www.philips.com/instantfit.


Dimensional drawing

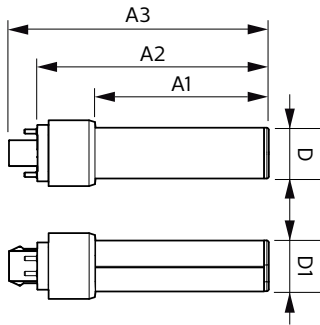


Product	D	D1	A1	A2	A3
5.5PL-C/LED/13H/827/IF5/P/4P 20/1	27 mm	27 mm	91.5 mm	122.4 mm	137.4 mm

PLED PLC-H 5-13W 550lm 2700K G24q


Photometric data



General Uniform Lighting
1.4 POINTS/13H/827/IF5/P/4P 20/1

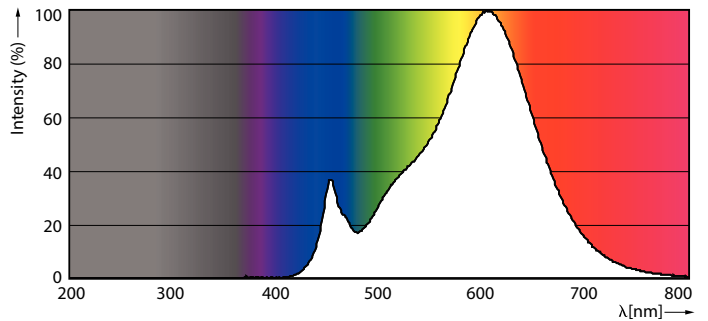



LEDtube PLC 13H 5.5W G24Q 827 15D ND

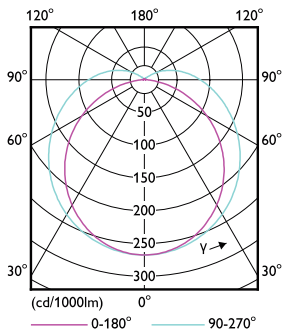

LEDtube PLC 13H 5W GX23-2 827 15D ND



LED InstantFit Lamps

Lifetime

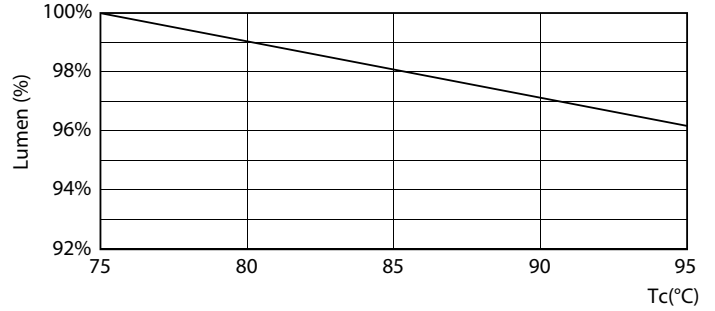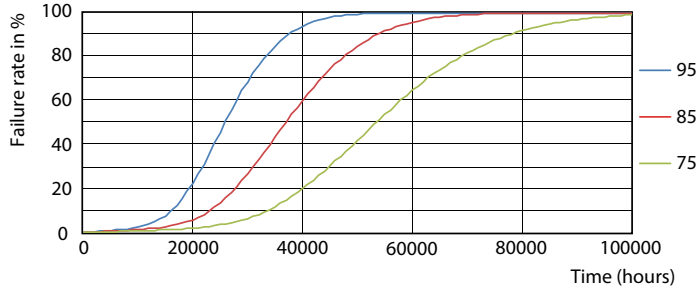


LEDtube PLC 13H 5.5W G24Q 827 15D ND

LEDtube PLC 13H 5.5W G24Q 827 15D ND

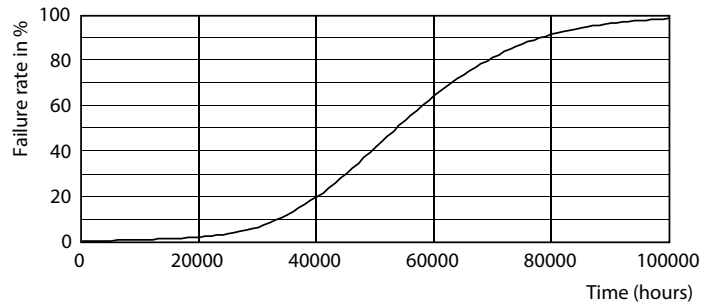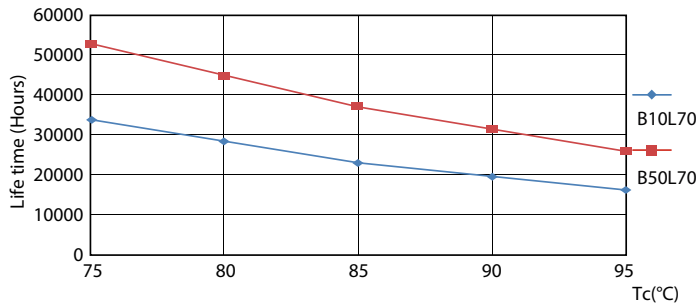

LEDtube PLC 13H 5.5W G24Q 827 15D ND

LEDtube PLC 13H 5W GX23-2 827 15D ND

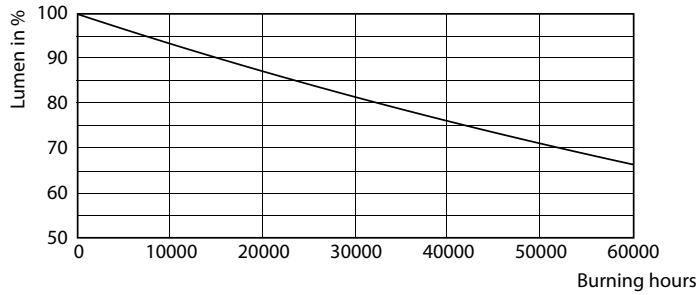

LEDtube PLC 13H 5W GX23-2 827 15D ND

LED InstantFit Lamps

