



# TrueForce High Lumen PAR

## 25.5PAR30L/PER/930/F25/ND/120-277V 6/1FB

Philips LED TrueForce PAR high lumen lamps are the perfect transition from CDM lamps to LED.

### Product data


|                                       |                                    |                                 |                                    |        |
|---------------------------------------|------------------------------------|---------------------------------|------------------------------------|--------|
| <b>General Information</b>            |                                    | <b>Power (Rated) (Nom)</b>      |                                    | 25.5 W |
| Base                                  | E26 [ Single Contact Medium Screw] | Lamp Current (Max)              | 230 mA                             |        |
| EU RoHS compliant                     | Yes                                | Lamp Current (Min)              | 115 mA                             |        |
| Nominal Lifetime (Nom)                | 25000 h                            | Wattage Equivalent              | 75 W                               |        |
| Switching Cycle                       | 50000X                             | Starting Time (Nom)             | 0.5 s                              |        |
| Technical Type                        | 25.5-75W                           | Warm Up Time to 60% Light (Nom) | 0.5 s                              |        |
| <b>Light Technical</b>                |                                    | Power Factor (Nom)              | 0.8                                |        |
| Color Code                            | 930 [ CCT of 3000K]                | Lamp Current at 277V            | 115 mA                             |        |
| Beam Angle (Nom)                      | 25 °                               | Voltage (Nom)                   | 120-277 V                          |        |
| Initial lumen (Nom)                   | 2150 lm                            | <b>Temperature</b>              |                                    |        |
| Luminous Flux (Rated) (Nom)           | 2150 lm                            | T-Case Maximum (Nom)            | 95 °C                              |        |
| Luminous Intensity (Nom)              | 10000 cd                           | <b>Controls and Dimming</b>     |                                    |        |
| Color Designation                     | White (WH)                         | Dimmable                        | No                                 |        |
| Correlated Color Temperature (Nom)    | 3000 K                             | <b>Approval and Application</b> |                                    |        |
| Luminous Efficacy (rated) (Nom)       | 84.00 lm/W                         | Suitable For Accent Lighting    | Yes                                |        |
| Color Consistency                     | <4                                 | <b>Product Data</b>             |                                    |        |
| Color Rendering Index (Nom)           | 90                                 | XUCDM.COPY.Product.Title        | 25.5PAR30L/PER/930/F25/ND/120-277V |        |
| LLMF At End Of Nominal Lifetime (Nom) | 70 %                               |                                 | 6/1FB                              |        |
| <b>Operating and Electrical</b>       |                                    |                                 |                                    |        |
| Input Frequency                       | 50 to 60 Hz                        |                                 |                                    |        |

TrueForce High Lumen PAR

|                                 |              |
|---------------------------------|--------------|
| EAN/UPC - Product               | 046677534677 |
| Order code                      | 534677       |
| Numerator - Quantity Per Pack   | 1            |
| Numerator - Packs per outer box | 6            |

|                     |              |
|---------------------|--------------|
| Material Nr. (12NC) | 929001917304 |
| Net Weight (Piece)  | 0.285 kg     |


Dimensional drawing

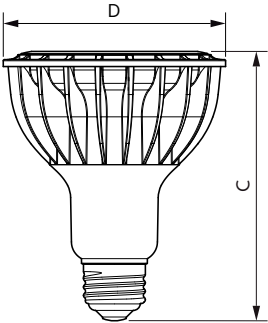


PAR30L 27.5-W 2000lm 25D 3000K E26 ND

|                                          |
|------------------------------------------|
| Product                                  |
| 25.5PAR30L/PER/930/F25/ND/120-277V 6/1FB |


Photometric data



LEDspot 25,5 PAR30L 930 F25

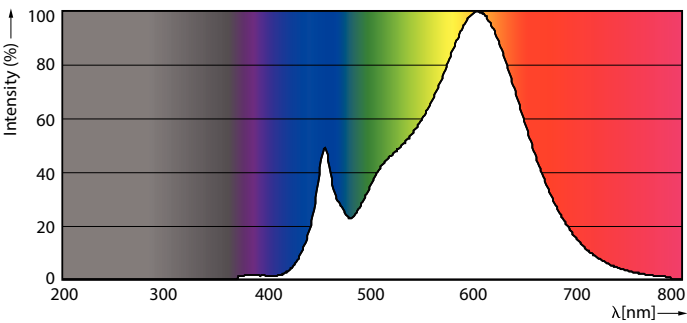


LEDspot PAR30 1FB




LEDspot 25,5 PAR30L 930 F25

TrueForce High Lumen PAR

Lifetime

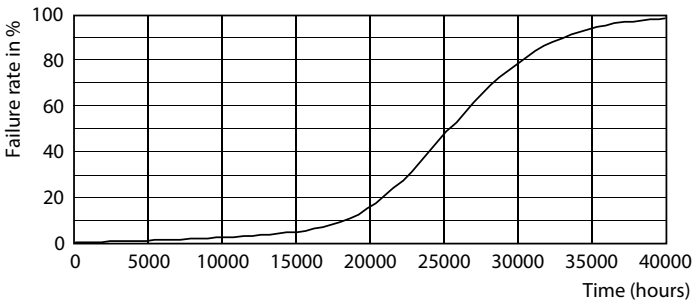

LEDspot PAR30 1FB

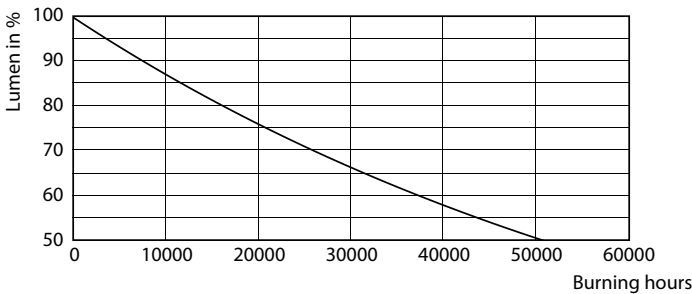

LEDspot PAR30 1FB

