



LED BR40

8.8BR40/PER/950/P/E26/DIM 6/1FB T20


Philips BR40 LED lamps are the smart alternative to standard incandescent. The traditional lamp design can provide excellent dimming performance with spectacular energy savings. They provide the beautiful light and dependable performance you expect from LED at an economical price.

Product data

General Information		Wattage Equivalent	
Base	E26 [Single Contact Medium Screw]	Wattage Equivalent	65 W
EU RoHS compliant	Yes	Starting Time (Nom)	0.5 s
Nominal Lifetime (Nom)	15000 h	Warm Up Time to 60% Light (Nom)	0.5 s
Switching Cycle	50000X	Power Factor (Nom)	0.7
Technical Type	8.8-65W	Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	950 [CCT of 5000K]	T-Case Maximum (Nom)	70 °C
Beam Angle (Nom)	110 °	Controls and Dimming	
Initial lumen (Nom)	800 lm	Dimmable	Yes
Luminous Flux (Rated) (Nom)	800 lm	Mechanical and Housing	
Color Designation	Daylight	Bulb Finish	Frosted
Correlated Color Temperature (Nom)	5000 K	Product Data	
Luminous Efficacy (rated) (Nom)	90.00 lm/W	XUCDM.COPY.Product.Title	8.8BR40/PER/950/P/E26/DIM 6/1FB T20
Color Consistency	<4	EAN/UPC - Product	046677548117
Color Rendering Index (Nom)	90	Order code	548115
LLMF At End Of Nominal Lifetime (Nom)	70 %	Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	6
Input Frequency	60 Hz	Material Nr. (12NC)	929002204263
Power (Rated) (Nom)	8.8 W	Net Weight (Piece)	0.165 kg
Lamp Current (Nom)	85 mA		

LED BR40


Dimensional drawing




BR40 8.8-65W 800lm 5000K E26 D

Product	D	C
8.8BR40/PER/950/P/E26/DIM 6/1FB T20	125 mm	160 mm

Photometric data




© 2019 Phosoronic Co. All Rights Reserved. Page 11



LEDbulb 65W E26 BR40 950 Frosted



LEDbulb 45,65W E26 930 Frosted

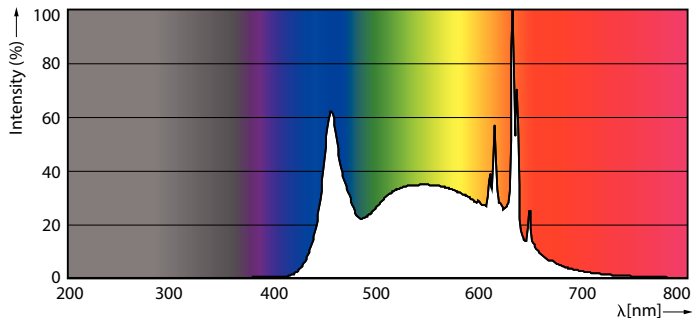

LEDbulb 65W E26 BR40 950 Frosted

LED BR40

Lifetime

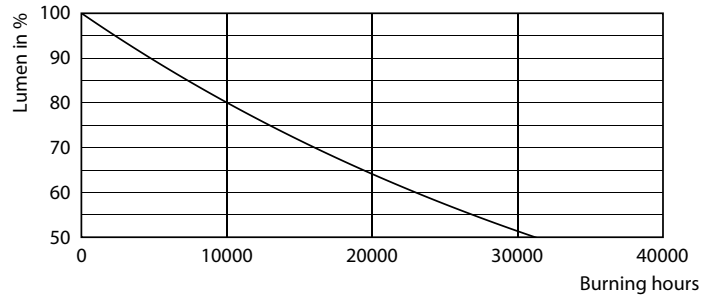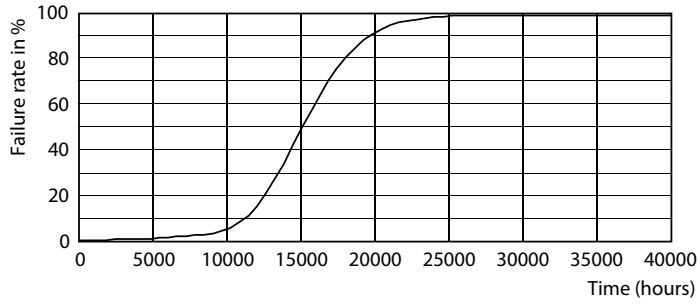

LEDbulb_15K LED

LEDbulb_15K LMP

