

LED A15

5A15/PER/950/CL/G/E26/DIM 1FB T20

Philips A15 LED Lamps offer energy saving ambience with an elegant effect. Their unique design provides light in all directions, giving lighting designers a long life alternative to standard incandescent sources.

Product data


General Information			
Base	E26 [Single Contact Medium Screw]		
EU RoHS compliant	Yes		
Nominal Lifetime (Nom)	15000 h		
Switching Cycle	20000X		
Technical Type	5-40W		
Light Technical			
Color Code	950 [CCT of 5000K]		
Initial lumen (Nom)	450 lm		
Color Designation	Daylight		
Correlated Color Temperature (Nom)	5000 K		
Luminous Efficacy (rated) (Nom)	90.00 lm/W		
Color Consistency	<4		
Color Rendering Index (Nom)	90		
LLMF At End Of Nominal Lifetime (Nom)	0.7 %		
Operating and Electrical			
Input Frequency	60 Hz		
Power (Rated) (Nom)	5 W		
Lamp Current (Nom)	55 mA		
Wattage Equivalent	40 W		
Starting Time (Nom)	0.5 s		

Warm Up Time to 60% Light (Nom)	0.5 s	
Power Factor (Nom)	0.7	
Voltage (Nom)	120 V	
Temperature		
T-Case Maximum (Nom)	50 ℃	
Controls and Dimming		
Dimmable	Yes	
Mechanical and Housing		
Bulb Finish	Clear	
Product Data		
XUCDM.COPY.Product.Title	5A15/PER/950/CL/G/E26/DIM 1FB T20	
EAN/UPC - Product	046677548308	
Order code	548305	
Numerator - Quantity Per Pack	1	
Numerator - Packs per outer box	10	
Material Nr. (12NC)	929002209004	
Net Weight (Piece)	0.020 kg	

Datasheet, 2020, January 24 data subject to change

LED A15


Dimensional drawing



A15 120V 40W 450lm 5000K E26 D CL

Product	D	С
5A15/PER/950/CL/G/E26/DIM 1FB T20	47 mm	86 mm

Photometric data



Calculus Phonometrics 4.5 Philips Lighting 6.V. Page: UT

120° 90° 60° 100 120° 90° 60° 100 150 V 7


180°

150°

150°

LEDbulb 40,60W E26 950 CL,FR


LEDbulb 40W E26 A15 950 CL

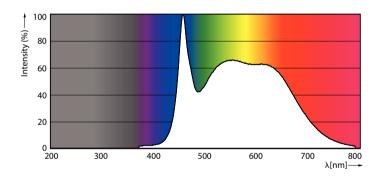


LEDbulb 40,60W E26 950

LED A15

Lifetime

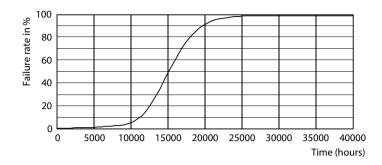



LEDbulb_15K LED

LEDbulb_15K LMP

