



LED PAR38

10PAR38/COR/930/F25/DIM/120V T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data


General information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	10-90W
Light technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	900 lm
Luminous Intensity (Nom)	3698 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	10 W
Lamp Current (Nom)	110 mA
Wattage Equivalent	90 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Bulb Shape	PAR38 [PAR 4.75 inch/121mm]
Approval and application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	- kWh
Product data	
Order product name	10PAR38/COR/930/F25/DIM/120V T20 6/1FB
EAN/UPC - Product	046677551889
Order code	551887
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6

LED PAR38

Material Nr. (12NC)	929002238204
Net Weight (Piece)	0.385 kg


Dimensional drawing

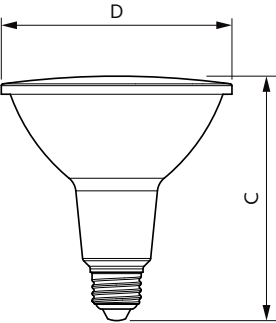


10PAR38/COR/930/F25/DIM/120V T20 6/1FB

Product	D	C
10PAR38/COR/930/F25/DIM/120V T20 6/1FB	125 mm	131 mm


Photometric data

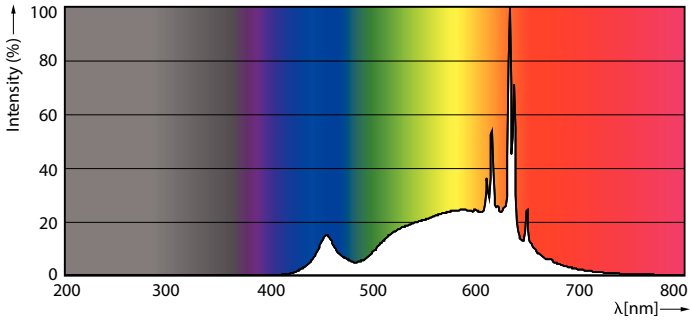

LEDspots 10W PAR38 E26 930 25D

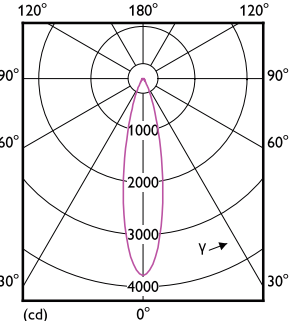


LEDspots 10W PAR38 E26 930 25D




LEDspots 10W PAR38 E26 930 25D

LED PAR38

Lifetime

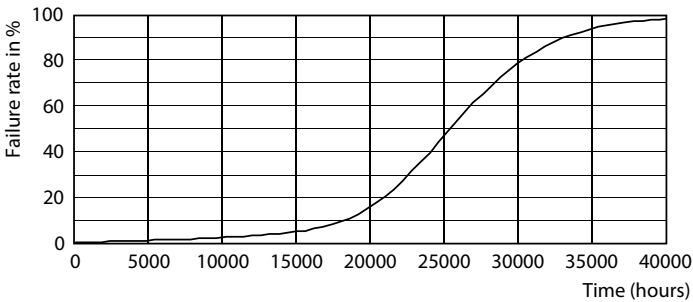

LEDspots LED 25K

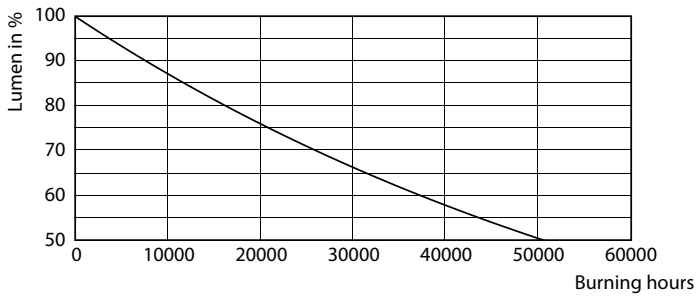

LEDspots LMP 25K

