



# T8

## 10T8/COR/48-830/IF15/G 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

### Product data

General Information	
Base	G13 [ Medium Bi-Pin Fluorescent]
EU RoHS compliant	Yes
Main Application	Indoor
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X

Light Technical	
Color Code	830 [ CCT of 3000K]
Initial lumen (Nom)	1500 lm
Luminous Flux (Rated) (Nom)	1500 lm
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	160.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	25000-105000 Hz
Power (Rated) (Nom)	10 W

Lamp Current (Max)	260 mA
Lamp Current (Min)	100 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120-277, 347 V

Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	50 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Product Length	1200 mm

# T8

## Approval and Application


Energy Saving Product	Yes
Approbation Marks	RoHS compliance UL certificate DLC compliance

## Product Data

XUCDM.COPY.Product.Title	10T8/COR/48-830/IF15/G 10/1
EAN/UPC - Product	046677553210

Order code	553214
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002252734
Net Weight (Piece)	0.230 kg
Model Number	9290022527


## Dimensional drawing

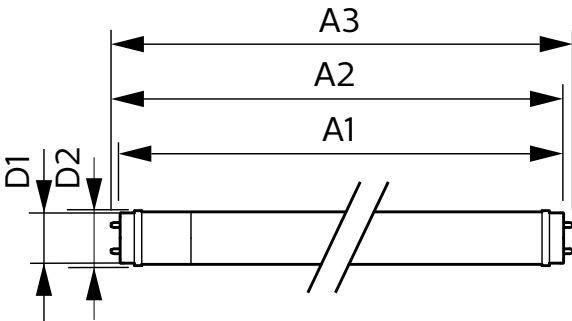


TLED120-277V 16.5W-25/28/32W 3500K G13ND

Product	D1	D2	A1	A2	A3
10T8/COR/48-830/IF15/G 10/1	25.7 mm	28 mm	1198.1 mm	1205.2 mm	1212.3 mm


## Photometric data



LEDTube\_10T8\_COR\_48-830\_IF15\_G 10\_1-GUL


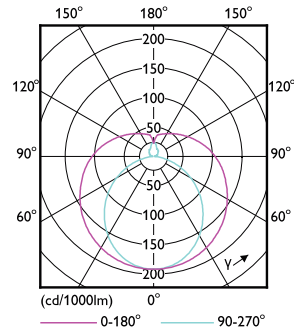


LEDtube 10W G13 840 ND

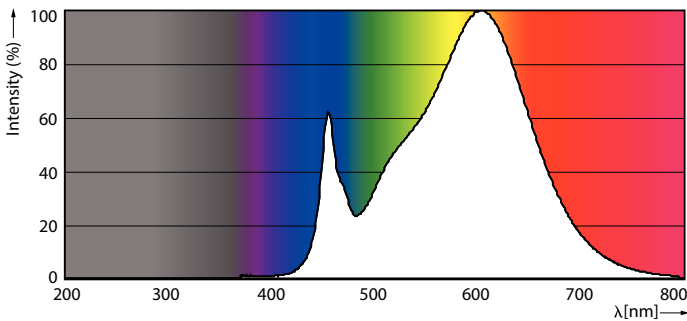



LEDTube\_10T8\_COR\_48-830\_IF15\_G 10\_1-POC

Lifetime

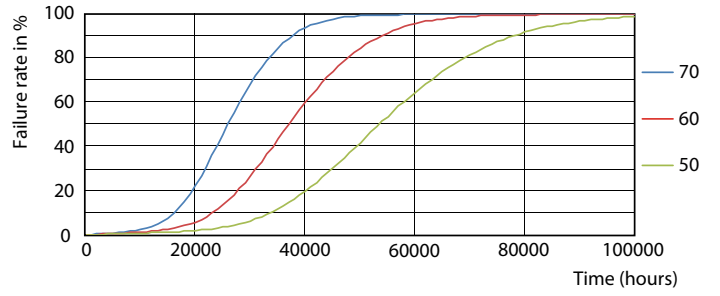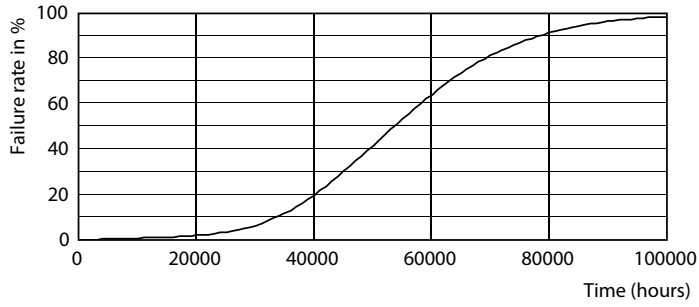


LEDtube 10W G13 850 ND

LEDtube 10W G13 850 ND

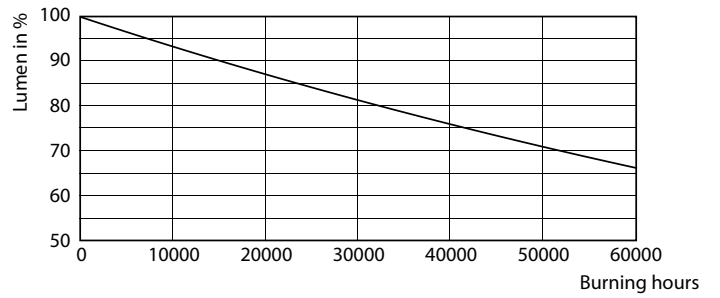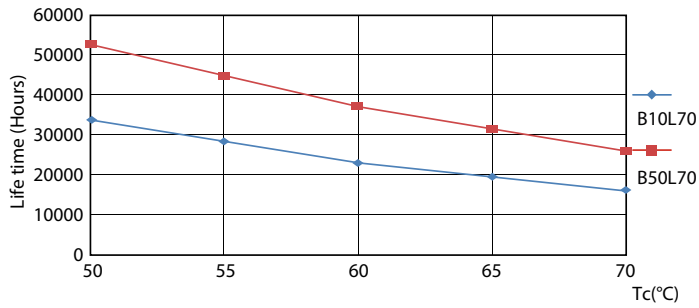

LEDtube 10W G13 850 ND

LEDtube 10W G13 850 ND

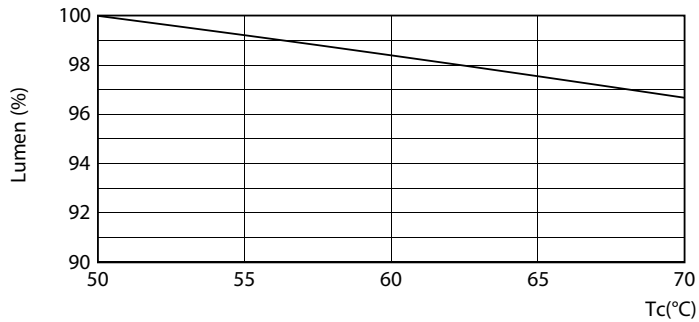

LEDtube 10W G13 850 ND

