

T8

10T8/COR/48-850/IF16/G 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.


Product data

General Information			
Base	G13 [Medium Bi-Pin Fluorescent]	Lamp Current (Max)	260 mA
EU RoHS compliant	Yes	Lamp Current (Min)	100 mA
Main Application	Indoor	Starting Time (Nom)	0.5 s
Nominal Lifetime (Nom)	50000 h	Warm Up Time to 60% Light (Nom)	0.5 s
Switching Cycle	50000X	Power Factor (Nom)	0.9
Light Technical		Voltage (Nom)	120-277, 347 V
Color Code	850 [CCT of 5000K]	Temperature	
Initial lumen (Nom)	1600 lm	T-Ambient (Max)	45 °C
Luminous Flux (Rated) (Nom)	1600 lm	T-Ambient (Min)	-20 °C
Correlated Color Temperature (Nom)	5000 K	T-Storage (Max)	65 °C
Luminous Efficacy (rated) (Nom)	160.00 lm/W	T-Storage (Min)	-40 °C
Color Consistency	<5	T-Case Maximum (Nom)	50 °C
Color Rendering Index (Nom)	82	Controls and Dimming	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Dimmable	No
Operating and Electrical		Mechanical and Housing	
Input Frequency	25000-105000 Hz	Product Length	1200 mm
Power (Rated) (Nom)	10 W		

Approval and Application	
Energy Saving Product	Yes
Approbation Marks	RoHS compliance UL certificate DLC compliance
Product Data	
XUCDM.COPY.Product.Title	10T8/COR/48-850/IF16/G 10/1
EAN/UPC - Product	046677553241

Order code	553248
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001991834
Net Weight (Piece)	0.230 kg
Model Number	9290019918



Dimensional drawing

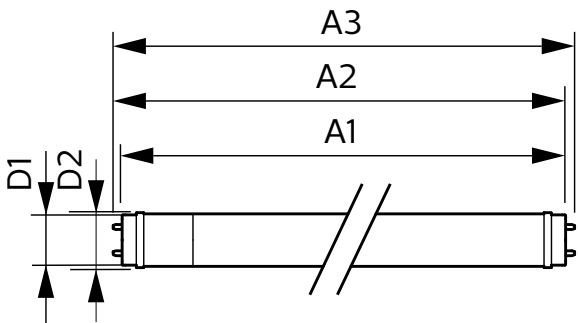

TLED 1200mmT8 120-277 10.5W 1650lm 5000K


Product	D1	D2	A1	A2	A3
10T8/COR/48-850/IF16/G 10/1	25.7 mm	28 mm	1198.1 mm	1205.2 mm	1212.3 mm

Photometric data




LEDtube 10W G13 850 ND

LEDtube 10W G13 850 ND

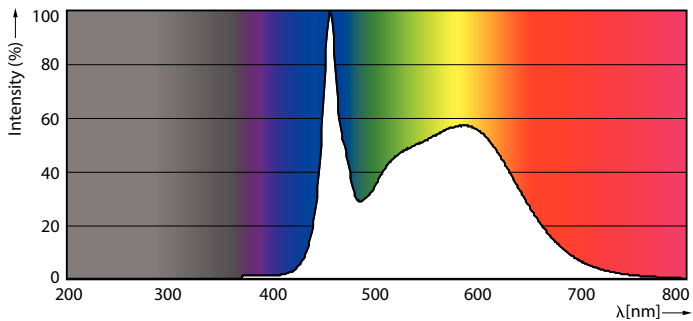


LEDtube 10W G13 850 ND


Lifetime

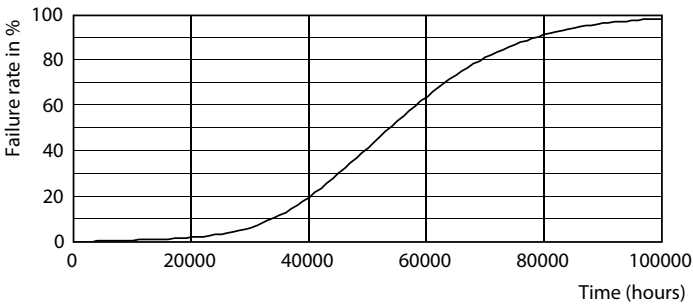


LEDtube 10W G13 850 ND

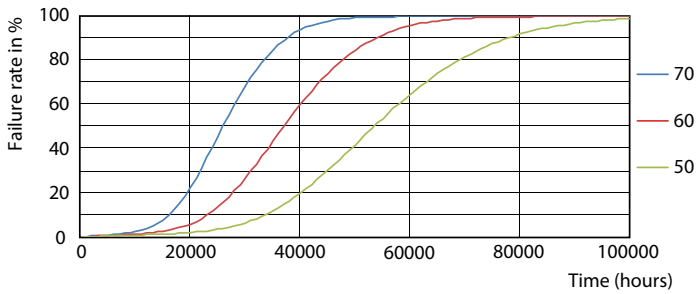


LEDtube 10W G13 850 ND

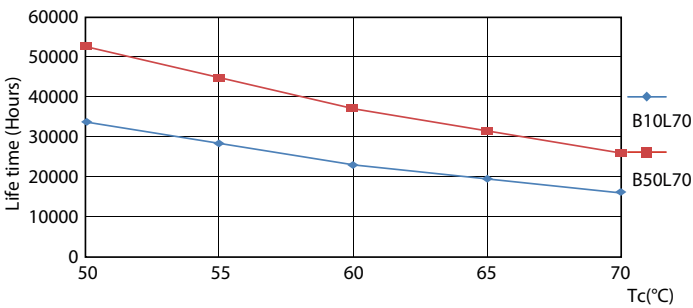

LEDtube 10W G13 850 ND

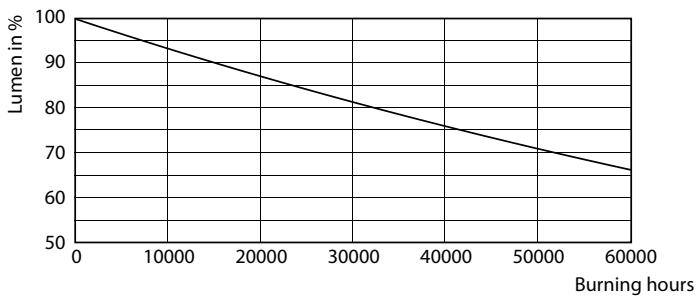

LEDtube 10W G13 850 ND

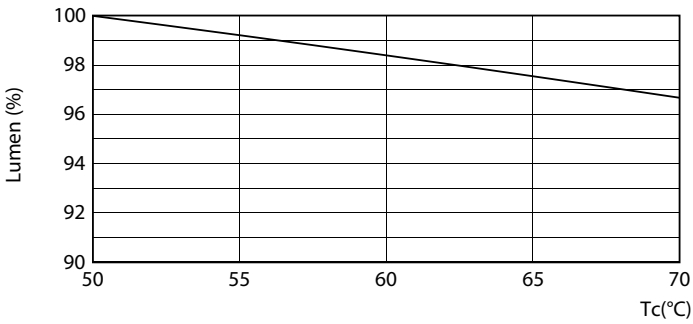

LEDtube 10W G13 850 ND

