

**PHILIPS****Lighting**

# LED PAR38

## 13PAR38/COR/927/F25/DIM/P/ULW/T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

### Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Color Code	927 [CCT of 2700K]
Beam Angle (Nom)	25 degree(s)
Luminous Flux	1,300 lm
Luminous Intensity (Nom)	5,700 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	100 lm/W
Color Consistency	<4
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power Consumption	13 W
Lamp Current (Nom)	150 mA
Wattage Equivalent	120 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	
0.5 s	
Power Factor (Fraction)	
0.7	
Voltage (Nom)	
120 V	
Temperature	
T-Case Maximum (Nom)	
185 °F	
Controls and Dimming	
Dimmable	
Only with specific dimmers	
Mechanical and Housing	
Bulb Finish	
Clear	
Bulb Material	
Plastic	
Bulb Shape	
PAR38	
UL Wet/ damp/ dry location	Wet location
Net Weight (Piece)	0.331 lb
Approval and Application	
Suitable For Accent Lighting	
Yes	
EU RoHS compliant	
Yes	
T20 compliant	
Yes	
Ambient temperature range	
-40 to +113 °F	

# LED PAR38

## Application Conditions

can it be used in closed luminaires Yes

## Product Data

Order product name 13PAR38/COR/927/F25/DIM/P/ULW/T20

6/1FB

Full product name 13PAR38/COR/927/F25/DIM/P/ULW/T20

6/1FB

Order code 586115

Material Nr. (12NC) 929003736904


Numerator - Quantity Per Pack 1

EAN/UPC - Product/Case 046677586119

Numerator - Packs per outer box 6



EAN/UPC - Case 50046677586114

## Dimensional drawing



Product	D	C
13PAR38/COR/927/F25/DIM/P/ULW/T20 6/1FB	4-7/8 inch	5-1/8 inch

## Photometric data

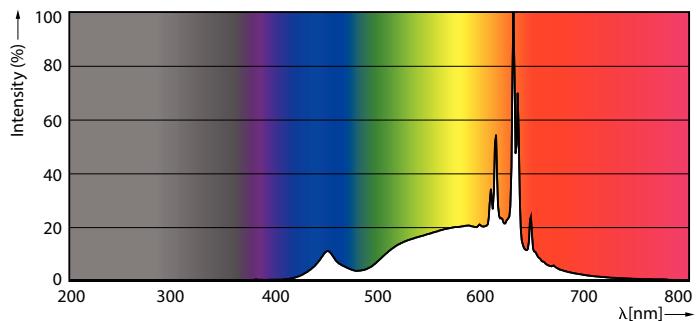


Accent Lighting Spots - 13PAR38/COR/927/F25/DIM/P/ULW/T20 6/1FB

Spectral Power Distribution Colour -  
13PAR38/COR/927/F25/DIM/P/ULW/T20 6/1FB


# LED PAR38

## Photometric data




Light Distribution Diagram - 13PAR38/COR/927/F25/DIM/P/ULW/T20  
6/1FB

## Lifetime

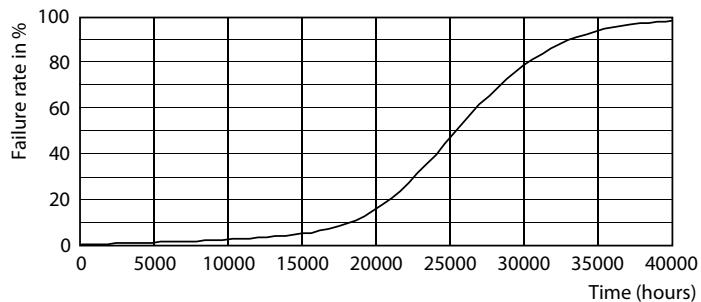

Life Expectancy Diagram

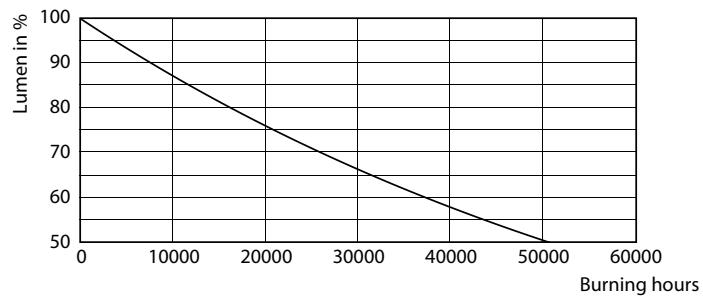

Lumen Maintenance Diagram - 13PAR38/COR/927/F25/DIM/P/ULW/T20  
6/1FB

